

Appendices

Francis Walsh Intermediate School



Perkins Eastman

Code Analysis

Project Description


An existing non-separated mixed use two-story 191,000 SF Intermediate school located in Branford, Connecticut

Chapter 3: Occupancies

Section	Description	Allowed/Req'd	Provided	Remarks
302.1	Occupancy	E - Educational A-1, A-2, A-3 - Assembly B - Business		
302.1.1	Incidental Use	Boiler rooms, Laboratories - Sprinkler system and smoke barrier		
302.2.1	Accessory Use	Assembly Areas		
302.3	Mixed Occupancies	NFPA 13R	Provided	Look at table 302.
302.3.2	Separated Uses	2 hr. (1 hr. reduction)	1hr. Provided	

Chapter 4: Special Detailed Requirements Based on Use and Occupancy

Section	Description	Allowed/Req'd	Provided	Remarks
410.3.1.1	Stage Height and Area	Area = Stage + Support Areas Height = Low point of stage to high point of underside of deck		
410.3.3	Exterior Stage Doors	Fire doors (Section 715) Vestibules on loading doors		
410.3.6	Scenery	Combustible materials rendered flame resistant		
410.3.7	Stage Ventilation	>1000 SF requires emergency ventilation		
410.3.7.1	Roof Vents	2 or more heat-activated vents Clear opening not less than 5% of stage area		
410.3.7.2	Smoke Control	See Section 909		
410.5.1	Dressing Rooms - Separation from Stage	Height <50 ft. = 1 Hr. Fire Barrier		
410.5.2	Separation From Each Other	1 Hr.		



410.5.4	Stage Exits	1 Approved means of egress @ each side of stage		
410.6	Automatic Sprinkler System	Equip according to Chapter 9. Not required under stage if <4' in clear height and used for storage		
410.7	Standpipes	Provide according to Section 905		
419	Group E			
419.2	Fire Barriers	Exception 1 - Sprinkler System		


Chapter 5: General Building Heights and Areas

Section	Description	Allowed/Req'd	Provided	Remarks
503 table	Assembly (A-1)	2 Floors/55 Ft. - 8,500 SF MAX		2B construction
503 table	Assembly (A-2/A-3)	2 Floors/55 Ft. - 9,500 SF MAX		2B construction
503 table	Educational (E)	2 Floors/55 Ft. - 14,500 SF MAX		2B construction
503 table	Business (B)	4 Floors/55 FT. - 23,000 SF MAX		2B construction
504.2	Automatic sprinkler system increase	+ 20 Feet / +1 Level		
506.1	General	$Aa=At+[At+lf/100] + [At+ls/100]$ Assembly(A-1): Aa = 38,250 SF Assembly(A-2, A-3): Aa = 42,750 SF Education(E): Aa = 65,250 SF		Need 2 Separated Education Areas
506.2	Area Modification	Frontage Increase $lf=100[F \setminus P - 0.25]W/30$ lf = 50%		
506.3	Area Modification	Automatic Sprinkler System increase = 300%		

Chapter 6: Construction Classification

Section	Description	Allowed/Req'd	Provided	Remarks
602.2	Type 2B	Noncombustible Materials		
601 Table Type 2B	Fire Rating for Building Elements	Structural Frame: 0 hr Bearing wall Int/ Ext: 0 hr Floor Const: 0 hr Roof Const: 0 hr		

Francis Walsh Intermediate School



Perkins Eastman


602 table	Exterior wall fire rating	>10'=30' requires 0 Hr rating at 2B Construction Type	0 Hr	
-----------	---------------------------	---	------	--

Chapter 7: Fire Resistant Rated Construction


Section	Description	Allowed/Req'd	Provided	Remarks
704.8	Allowable Area of Openings	Table 704.8 Fire Separation Distance >20' = No limit		
706.1	Fire Barriers	Horizontal Exits, separate occupancies, incidental use areas, separate single occupancy into different fire areas.	2 hr. Provided	Table 706.3.7 E & A - 2 Hr.
706.5	Horizontal fire Barriers	As per section 711	Provided	Incidental use sep.
706.7	Openings	Protected as per 715	Provided	
715.3 Table	Fire Door Ratings	2 HR Assembly = 1 ½ Hr. door		

Chapter 9: Fire Protection Systems

Section	Description	Allowed/Req'd	Provided	Remarks
903.2.1	Group A	Automatic Sprinkler System shall be provided		
903.2.1.1	Group A-1	Occupant Load >300 Occupants		
903.2.1.2	Group A-2	Fire Area >5000 SF, Occupancy Load >300		
903.2.1.3	Group A-3	Fire Area >12000 SF, Occupancy Load >300		
903.2.2	Group E	Automatic sprinkler system provided throughout Fire Areas >20,000 SF		
905.3.4	Stages	Hose connections connected to Sprinkler system at each end of stage		
906.1	Portable Fire Extinguishers	Required		
907.2.1	Fire Alarm - Group A	Manual alarm not required if automatic sprinkler system		
907.2.3	Fire Alarm - Group E	Fire alarm connected to building system Ex. 1 <50 people Ex. 2 Manual alarm not required if interior corridor protected by smoke		




			detectors; auditorium, café, gym protected by head detectors		
--	--	--	---	--	--




Chapter 10: Means of Egress

Section	Description	Allowed/Req'd	Provided	Remarks
1003,2	Ceiling Height	Min 7ft		
1004.1.2 Table	Max floor area allowance per Occupant	Gym = 5 net Assembly (fixed seats) = # of seats Assembly (cafeteria) = 15 net Business = 100 gross Stages = 15 net Lockers = 50 gross Storage/Mechanical = 300 gross Library (reading) = 50 net Library (stacks) = 100 gross Educational (classroom) = 20 net Educational (shops) = 50 net		
1004.3	Posting of Occupancy Load	Assembly Areas		
1004.7	Fixed Seating	Occupancy load determined by # of fixed seats		
1004.8	Outdoor Areas	Occupancy load assigned by building official. Provide means of egress		
1004.9	Multiple Occupancies	2 or more occupancies utilize same means of egress, meet more stringent requirements		
1005.1	Minimum Required Egress Width	Occupancy Load x 0.2		
1007.1	Accessible Means of Egress	Required		
1008.1.1	Exit Door requirements	Size of Doors - not less than 32"		
1008.3	Turnstiles	Not obstruct means of egress		
1010.2	Ramp Slope	1:12 slope max for egress 1:18 all other pedestrian uses	Provided	Remarks
1010,4	Ramp Rise	Max rise 30"t		
1010.4	Ramp width	Min 36" clear btwn handrails		
1010.6.1	Ramp landing size	36" W x 60" L		Landing w/ direction change 60"x60"




1010.8	Ramp Handrails	Ramps with rise >6" must have handrails both sides		
1011.1.1	Floor Proximity Exit Signs	Group A >300 Occupants, required		
1013	Exit Access			
1013.3	Common Path of Travel	75 ft max		
1013.4	Aisles	Assembly – comply with Section 1024		
1014.1	Exit and Exit Access Doorways	Table 1014.1 Max occupancy load = 50 with 1 means of egress		
1014.3	Boiler, Incinerator and Furnace Rooms	>500 SF requires 2 exits		
1014.6	Stage Means of Egress	1 Means of egress at each side of stage required		
1015.1 Table	Exit Access Travel Distance	A, E - 250 ft w/sprinkler		
1016.1	Corridor Fire resistance	Occupancy >30 - 0 hr w/ sprinkler		
1016.2	Corridor Width	Ex. 4 – Group E w/ 100 Occ. Load = 72" minimum		
1018.1	Min number of exits	Min 2 exits w 1-500 occupant load 3 exits 501-1000 occupant load		
1021.2	Separation	Horizontal exit with fire wall (705) or fire barrier (706) Not less than 2 Hr.		
1024.2	Assembly Main Exit	Exits can be distributed around perimeter		
1024.6.1	Without Smoke Protection	Slopes > 1:12 = 22/100" per occupant Slopes < 1:12 = 2/10" per occupant		
1024.7	Travel Distance	250 ft. in sprinklered building		
1024.9.1	Minimum Aisle Width	42" for ramped with seating on both sides 36" for ramped with seating on one side		

Francis Walsh Intermediate School



Perkins Eastman

	1025.1.1	Emergency Escape & rescue	Group E Occupancies – not required with sprinkler system		
--	----------	---------------------------------	---	--	--



Chapter 11: Accessibility

Section	Description	Allowed/Req'd	Provided	Remarks
1106	Parking & Passenger Loading Facilities			
1106.5.1	Van Space	1 for every 6 accessible spaces		Space 16' Wide w/8" aisle
1108.2	Assembly Area Seating			
1108.2.1	Wheelchair Spaces	Table 1108.2.2.1: 301-500 = 6 wheelchair spaces		
1108.2.7	Assistive Listening Systems	Table 1108.2.7.1: 201-500 = 2 receivers + 1/25 seats over 50 ¼ of receivers hearing aid compatible		

CONNECTICUT STATE DEPARTMENT OF EDUCATION
Division of Finance and Internal Operations
Bureau of School Facilities

**SCHOOL CONSTRUCTION PROJECTS: GUIDELINES FOR
APPLYING FOR RENOVATION STATUS**

PURPOSE:

Section 10-282 (18) of the Connecticut General Statutes (C.G.S.) defines “Renovation” as *“a school building project to totally refurbish an existing building (A) which results in the renovated facility taking on a useful life comparable to that of a new facility and which will cost less than building a new facility as determined by the department, provided the school district may submit a feasibility study and cost analysis of the project prepared by an independent licensed architect to the department prior to final plan approval, (B) which was not renovated in accordance with this subdivision during the twenty-year period ending on the date of application, and (C) of which not less than seventy-five per cent of the facility to be renovated is at least thirty years old.”*

The purpose of this legislation is to support local decisions to renovate existing schools (or purchase and renovate existing buildings) whenever such options represent a cost effective alternative to constructing a new facility. The Department will use these guidelines to determine whether a project is eligible for designation as a “Renovation” project.

GUIDELINES FOR ELIGIBILITY:

In order to be considered a renovation as defined above, the following conditions must be met:

1. The applicant must make written application for such status.
2. (a) The applicant must have gone through a process of evaluating the proposed project compared to a new facility by providing feasibility study and cost analysis.
(b) Professional estimates must be available to document that significant cost savings will result.
3. The entire facility must be brought into 100 percent compliance with all applicable codes (including handicapped accessibility) when the renovation project is complete. Partial renovations of an entire facility or complete renovations of a wing of a facility do not qualify

SCHOOL CONSTRUCTION PROJECTS: GUIDELINES FOR APPLYING FOR RENOVATION STATUS

GUIDELINES FOR ELIGIBILITY (continued):

4. The renovation must incorporate education technology capability throughout the facility, as recommended in the *Guidelines for Technology Infrastructure in Connecticut Schools* (or other current Technology Infrastructure standards).
5. It must be determined by a structural engineer that the structural integrity of the original building has not been compromised and is adequate to provide for continued occupancy for a period of time comparable to that of a new facility.
6. A detailed report on all existing building systems must be provided, including finishes, roofing, plumbing, water supply, fire protection, HVAC, electrical systems, energy monitoring, communications and security systems. Signed professional opinions must be provided that all systems will have a useful life of 20 years (or that comparable to a new system if less than 20 years) following the construction project completion.
7. All new and replacement windows must be energy efficient.
8. The site of the existing facility must be central to the area served and adequate to provide the educational programs offered.
9. Any other analysis deemed necessary by the Department to properly evaluate the request must be provided

DETERMINATION OF ELIGIBILITY:

Upon review of the materials submitted, the Division of Finance and Internal Operations will make recommendation to the Commissioner as to the project's eligibility for renovation status (allow 30 days).

The school district shall be notified in writing of the Commissioner's determination.

Note: Statements of compliance with requirement Nos. 3 through 7 must be signed and stamped by design professionals. Requirement No. 8 must be signed by Superintendent of Schools.



ASHRAE Life Expectancy Table

Equipment Item	Median Years	Equipment Item	Median Years	Equipment Item	Median Years
Air conditioners		Air terminals		Air-cooled condensers	20
Window unit	10	Diffusers, grilles, and registers	27	Evaporative condensers	20
Residential single or split package	15	Induction and fan coil units	20	Insulation	
Commercial through-the-wall	15	VAV and double-duct boxes	20	Molded	20
Water-cooled package	15	Air washers	17	Blanket	24
Heat Pumps		Ductwork	30	Pumps	
Residential air-to-air	15	Dampers	20	Base-mounted	20
Commercial air-to-air		Fans		Pipe-mounted	10
Commercial water-to-air	19	Centrifugal	25	Sump and well	10
Roof-top air conditioners		Axial	20	Condensate	15
Single-zone	15	Propeller	15	Reciprocating engines	20
Multi-zone	15	Ventilating roof-mounted	20	Steam turbines	30
Boilers, hot water (steam)		Coils		Electric motors	18
Steel water-tube	24 (30)	DX, water, or steam	20	Motor starters	17
Steel fire-tube	25 (25)	Electric	15	Electric transformers	30
Cast iron	35 (30)	Heat Exchangers		Controls	
Electric	15	Shell-and-tube	24	Pneumatic	20
Burners	21	Reciprocating compressors	20	Electric	16
Furnaces		Packaged chillers		Electronic	15
Gas- or oil-fired	18	Reciprocating	20	Valve actuators	
Unit heaters		Centrifugal	23	Hydraulic	15
Gas or electric	13	Absorption	23	Pneumatic	20
Hot water or steam	20	Cooling towers		Self-contained	10
Radiant Heaters		Galvanized metal	20		
Electric	10	Wood	20		
Hot water or steam	25	Ceramic	34		



Brooks Environmental
Consulting, LLC

9 Isaac Street
Norwalk, CT
06850

Phone: 203-853-9792
Fax: 203-853-0273
www.brooksenviro.com

June 1, 2011

Mark Deming, *Director of Buildings & Grounds*
Branford Public Schools
1111 Main Street
Branford, CT 06405-3717

Dear Mr. Deming:

Attached are the results of asbestos testing of caulk and glazing putty samples taken from the windows and doors at Walsh Intermediate School.

Asbestos was found in the glazing putty associated with windows. Asbestos was not found in the caulk between masonry and frame of the windows and doors.

Sincerely yours,



Mark F. Granville
Senior Consultant

enclosures
MG110032

241101753

page 1 of 1

SITE INFORMATION

name: FRANCIS WALSH INTERMEDIATE SCHOOL

address: 185 Damascus Road
Branford, CT

INSPECTOR INFORMATION

name: M. Granville

date: 5/19/11

SAMPLE ID	T	S	M	LOCATION	COMMENTS OR DESCRIPTION
MG110032-1			X	window near stair H	interior frame caulk
MG110032-2			X	"	"
MG110032-3			X	window near stair B	"
MG110032-4			X	window near stair A	exterior frame caulk
MG110032-5			X	window near stair B	"
MG110032-6			X	window near stair A	exterior glazing putty
MG110032-7			X	window near stair B	"
MG110032-8			X	entry door between gym & band	window glaze putty
MG110032-9			X	"	exterior frame caulk
MG110032-10			X	main entrance	window glaze putty
MG110032-11			X	"	exterior frame caulk

note: T = thermal system insulation
S = surfacing material
M = miscellaneous material

RECEIVED
MAY 20 2011
By [Signature] 1:50 PM



EMSL Analytical, Inc.

4 Fairfield Boulevard, Wallingford, CT 06492

Phone: 203-284-5948 Fax: (203) 284-5978 Email: wallingfordlab@emsl.com

Attn: **Mark F. Granville**
Brooks Environmental Consulting, LLC
9 Isaac Street
Norwalk, CT 06853

Customer ID: BL50
Customer PO:
Received: 05/20/11 1:50 PM
EMSL Order: 241101755

Fax: (203) 853-0273 Phone: (203) 853-9792
Project: **MG110032 Walsh Francis Walsh Intermediate School-**
185 Damascus Road Branford, CT

EMSL Proj:
Analysis Date: 5/24/2011

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
MG110032-1 241101755-0001	Window near stair H - Interior frame caulk	Gray Non-Fibrous Heterogeneous	4% Fibrous (other) <1% Cellulose	96% Non-fibrous (other)	None Detected
MG110032-2 241101755-0002	Window near stair H - Interior frame caulk	Gray Non-Fibrous Heterogeneous	6% Fibrous (other) <1% Cellulose	94% Non-fibrous (other)	None Detected
MG110032-3 241101755-0003	Window near stair B - Interior frame caulk	Gray Non-Fibrous Heterogeneous	5% Fibrous (other)	95% Non-fibrous (other)	None Detected
MG110032-4 241101755-0004	Window near stair A - Exterior frame caulk	Red Non-Fibrous Heterogeneous		100% Non-fibrous (other)	None Detected
MG110032-5 241101755-0005	Window near stair B - Exterior frame caulk	Red Non-Fibrous Heterogeneous	<1% Cellulose	100% Non-fibrous (other)	None Detected
MG110032-6 241101755-0006	Window near stair A - Exterior glazing putty	Gray Fibrous Heterogeneous	4% Glass <1% Cellulose	94% Non-fibrous (other)	2% Chrysotile
MG110032-7 241101755-0007	Window near stair B - Exterior glazing putty	Gray Fibrous Heterogeneous	3% Glass <1% Cellulose	95% Non-fibrous (other)	2% Chrysotile

Initial report from 05/24/2011 11:12:43

Analyst(s)
William Shedrawy (11)

Gloria V. Oriol, Laboratory Manager
or other approved signatory

Due to magnification limitations inherent in PLM, asbestos fibers in dimensions below the resolution capability of PLM may not be detected. Samples reported as <1% or none detected require additional testing by TEM to confirm asbestos quantities. The above test report relates only to the items tested and may not be reproduced in any form without the express approval of EMSL Analytical, Inc. EMSL's liability is limited to the cost of analysis. EMSL bears no responsibility for sample collection activities or analytical method limitations. If and use of test results are the responsibility of the client. Samples received in good condition unless otherwise noted.
Samples analyzed by EMSL Analytical, Inc. Wallingford, CT NVLAP Lab Code 200700-0.



EMSL Analytical, Inc.

4 Fairfield Boulevard, Wallingford, CT 06492

Phone: 203-284-5948 Fax: (203) 284-5978 Email: wallingfordlab@emsl.com

Attn: **Mark F. Granville**
Brooks Environmental Consulting, LLC
9 Isaac Street
Norwalk, CT 06853

Customer ID: BL50
Customer PO:
Received: 05/20/11 1:50 PM
EMSL Order: 241101755

Fax: (203) 853-0273 Phone: (203) 853-9792
Project: **MG110032 Walsh Francis Walsh Intermediate School-**
185 Damascus Road Branford, CT

EMSL Proj:
Analysis Date: 5/24/2011

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
MG110032-8 241101755-0008	Entry door between gym & band - Window glaze putty	Gray Non-Fibrous Heterogeneous	<1% Cellulose <1% Synthetic	88% Non-fibrous (other)	12% Chrysotile
MG110032-9 241101755-0009	Entry door between gym & band - Exterior frame caulk	Gray Non-Fibrous Heterogeneous	<1% Cellulose	100% Non-fibrous (other)	None Detected
MG110032-10 241101755-0010	Main Entrance - Window glaze putty	White Non-Fibrous Heterogeneous	<1% Cellulose <1% Fibrous (other)	100% Non-fibrous (other)	None Detected
MG110032-11 241101755-0011	Main Entrance - Exterior frame caulk	Red Non-Fibrous Heterogeneous	<1% Cellulose	100% Non-fibrous (other)	None Detected

Initial report from 05/24/2011 11:12:43


Analyst(s)

William Shedrawy (11)

Gloria V. Oriol, Laboratory Manager
or other approved signatory

Due to magnification limitations inherent in PLM, asbestos fibers in dimensions below the resolution capability of PLM may not be detected. Samples reported as <1% or none detected require additional testing by TEM to confirm asbestos quantities. The above test report relates only to the items tested and may not be reproduced in any form without the express approval of EMSL Analytical, Inc. EMSL's liability is limited to the cost of analysis. EMSL bears no responsibility for sample collection activities or analytical method limitations. In and use of test results are the responsibility of the client. Samples received in good condition unless otherwise noted.

Samples analyzed by EMSL Analytical, Inc. Wallingford, CT NVLAP Lab Code 200700-0.



Fact Sheet for Schools: Caulk containing PCBs may be present in older schools and buildings

Between 1950 and 1978, caulk containing potentially harmful PCBs (polychlorinated biphenyls) was used in many buildings, including schools. Although PCBs were banned in the United States in 1978, contaminated caulk still exists in older establishments that have not had the caulk replaced. PCB bioaccumulation in children can damage immune, reproductive, nervous, and endocrine systems.

Children can be exposed to PCBs by:

- Breathing in dust contaminated with PCBs
- Touching caulk and contaminated soil directly
- Putting their hands into their mouths after touching the caulk, soil, and surrounding building materials.

PCBs were not added to caulk after 1978. Therefore, in general, schools built after 1978 do not contain PCBs in caulk.

What are PCBs?

PCBs are organic chemicals that were used in construction materials and electrical products produced before 1978. Caulk containing these chemicals may still be present in older schools and buildings, sometimes at high levels. With increased awareness and cleanup efforts, PCB levels in the United States have decreased substantially.

How are people exposed to PCBs?

People whose workplaces and jobs involve working with PCB-laden objects or in PCB cleanup are at the highest risk for elevated exposure. Most people have some accumulation of PCBs in their bodies. Fish, meat, and dairy contain small amounts of PCBs. In fact, most peoples' exposure to PCBs is via the food chain. When products containing PCBs are disposed of improperly, PCBs can enter waterways and contaminate fish and other animals. Indoor air has been found to contain PCBs from some types of caulk in building materials. People can also be exposed to PCBs when handling PCB-containing products such as caulk.

Does the caulk in my home or other places contain PCBs?

PCBs in caulk have not been found in single-family homes. EPA has only found the chemical in caulk in large, older apartment complexes and some older buildings, such as schools.

What can I do about PCBs in schools?

If caulk containing PCBs is discovered, you should avoid direct contact with caulk and nearby porous materials, if possible. If caulk-containing PCBs are discovered, be sure to limit exposure to the caulk until it has been safely removed. Here are some ways for decreasing exposure:

- Keep children from touching caulk or surfaces near caulk.
- Clean frequently to reduce dust.
- Use wet cloths to clean surfaces.
- Use vacuums with HEPA filters.
- Wash children's hands with soap and water before eating.
- Wash children's toys often.
- Wash surfaces, window sills, walls, and objects often in rooms known to have PCB-containing caulk.
- Consider testing the air for PCBs or test the caulk if it is peeling or visibly deteriorating.
- Follow safe work practices when renovating.
- Improve ventilation by opening windows or adding exhaust fans.

What NOT to Do:

- Do not attempt to remove PCB-containing caulk by yourself. PCBs should be removed by personnel wearing protective equipment who follow procedures to minimize the spread of PCBs.
- Do not sweep with dry brooms or use dusters because they spread dust.

Are children in direct danger if their school has caulk containing PCBs?


PCBs accumulate in the body in high levels only after prolonged exposure to the chemical. Follow the recommended procedures to reduce exposure. Restricting children from areas where PCB-containing caulk is located, promoting safe work practices during renovation activities in schools, and removing caulk safely as part of a PCB removal or renovation project reduces the potential for exposure.

EPA is helping to address the issue of PCBs in caulk

EPA is conducting research on how the public is exposed to PCBs in caulk and on the best approaches for reducing exposure and potential risks associated with PCBs in caulk. Where PCBs have been found in caulk, EPA is committed to helping schools and communities enact plans to reduce exposure. Please contact your regional PCB coordinator at 888-835-5372 for help with assessing contamination and exposure and developing cleanup plans.

Contact

Call EPA's PCBs in Caulk Hotline: 888-835-5372 to learn more about PCBs in caulk and to get information on PCB professionals in your area.

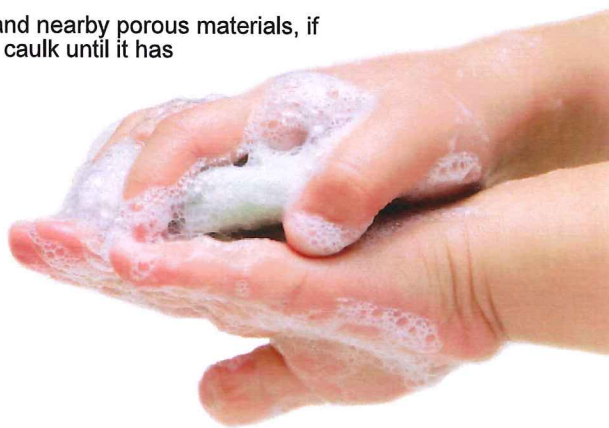



Fact Sheet for Schools: PCBs in Caulk School Checklist

✓ School Checklist

Was your school built or remodeled between 1950 and 1978?

Many older schools and older buildings built or remodeled before 1978 have been found to have caulk containing PCBs (polychlorinated biphenyls). These chemicals can have adverse effects on human health, so children and teachers need to be informed about potential risks.

Do you see walls or window sills in your school with cracking caulk?

As caulk ages, it cracks and flakes from the source. This leads to PCB-laden dust. Also, PCBs can, over time, be released from caulk into the air. Find out if your school has PCBs by calling a professional to test for PCBs in the air or, if caulk is peeling or visibly deteriorating, by having a professional test the caulk.

Have PCBs already been detected in your school's caulk?

If so, caulk with the highest levels of PCBs should be removed in the short term. Ultimately, the goal is to remove all PCB-contaminated caulk at levels greater than 50 parts per million.

Do children touch surfaces frequently or play in soil around their school?

Yes, young children can put their hands in their mouths after touching PCB-contaminated surfaces, which could seriously impact their health. Wash children's hands and toys often to reduce potential exposure.

Soil around schools and buildings may also contain PCB caulk dust or flakes. This would include playground soil and soil surrounding building foundations. Children can accidentally swallow the soil after handling it when outdoors, or the soil may be tracked indoors from shoes onto carpet and floors where children have a greater risk of ingesting it. Teach children to wipe and remove their shoes and to wash their hands after playing outside.

School Advisory: Talking Points for Teachers and Daycare Staff

Why should you be worried about PCBs in caulk?

High levels of PCBs in the body can cause adverse effects on the immune, reproductive, nervous, and endocrine systems. PCB exposure could result in cancer.

Can PCBs be found in and around my school?

PCBs are harmful chemicals sometimes found in schools and other buildings built or remodeled before 1978, and are found in and around building joints and other places, including:

- Cracking and flaking caulk
- Contaminated soil
- Masonry adjacent to windows
- Indoor air that has been exposed to PCBs
- Paint, electrical transformers, and light ballasts.

PCBs were not added to caulk after 1978. Therefore, in general, schools built after 1978 do not contain PCBs in caulk.

Are my children at risk for PCB exposure?

PCBs accumulate in the body in high levels only after prolonged exposure to the chemical. Follow the recommended procedures to reduce exposure. Restricting children from areas where PCB-containing caulk is located, promoting safe work practices during renovation activities in schools, and removing caulk safely as part of a PCB removal or renovation project reduces the potential for exposure.

How can you prevent PCB accumulation in the body?

- Keep children from touching caulk or surfaces near caulk
- Keep children away from soil that may contain PCBs
- Clean the floor, walls, and window sills regularly with wet cloths
- Wash children's hands and toys often.
- Improve ventilation by opening windows or adding exhaust fans.

Contact

Call EPA's PCBs in Caulk Hotline: 888-835-5372 to learn more about PCBs in caulk and to get information on PCB specialist professionals in your area.



EPA/600/R-12/034

January 2012

LITERATURE REVIEW OF REMEDIATION METHODS FOR PCBS IN BUILDINGS

by

Environmental Health & Engineering, Inc.
Needham, Massachusetts

Contract No. EP-C-10-043

for

Zhishi Guo
Project Officer
Air Pollution Prevention and Control Division
National Risk Management Research Laboratory
Research Triangle Park, NC 27711

National Risk Management Research Laboratory
Office of Research and Development
U.S. Environmental Protection Agency
Cincinnati, OH 45268

DISCLAIMER

The work reported in this document was funded by the United States Environmental Protection Agency (EPA) under Contract No. EP-C-10-043 to Environmental Health & Engineering, Inc. It has been subjected to the Agency's peer and administrative reviews and has been approved for publication as an EPA document. Any opinions expressed in this report are those of the author(s) and do not, necessarily, reflect the official positions and policies of the EPA. Any mention of products or trade names does not constitute recommendation for use by the EPA.

ABSTRACT

Polychlorinated biphenyls (PCBs) had numerous commercial applications before they were banned in the U.S. in 1978. Those uses included the addition of PCBs to building construction materials, such as adhesives, paint, and particularly caulk used to seal components of a building envelope. Growing awareness of this issue has led to an increase in the need to demonstrate compliance with current regulations for PCBs within buildings.

This literature review contains a description and analysis of existing methods for management of PCBs in construction materials. Information on the strengths and limitations, efficacy, cost, and byproducts of each remediation method is presented, where available. The report is based upon a comprehensive review and synthesis of conference proceedings, and technical reports by government and commercial organizations.

Numerous methods for abatement, i.e., reducing the amount of PCBs in building materials, and mitigation, i.e., limiting the release of PCBs from building materials, are described in the literature. The abatement techniques involve removal of PCB-containing materials with mechanical or hand tools, or application of chemicals intended to either extract or degrade PCBs. Techniques for mitigation of PCB impacts in buildings involve engineering controls such as encapsulation and ventilation that limit PCB levels in occupied parts of a building. Mitigation was also achieved through administrative controls, which were typically guided by a site-specific assessment of risk, and included reassignment of space use and implementation of an operation and maintenance plan for building-related PCBs.

Abatement through removal of PCB-containing materials and numerous mitigation methods were generally reported to be effective for attaining compliance with current PCB regulations. The efficacy of chemical degradation and extraction techniques for PCB concentrations encountered in caulk and other products manufactured with PCBs has not yet been demonstrated in the literature. Most reports indicate that the greatest control of PCBs in building materials is obtained when multiple remediation methods are employed. The selection of remediation methods for a particular building should be determined on a case by case basis. The costs of managing PCB-containing building materials can be substantial, an observation that underscores the importance of understanding site-specific conditions, establishing practical remediation goals, and selecting the most appropriate remediation methods.

FOREWORD

The U.S. Environmental Protection Agency (EPA) is charged by Congress with protecting the Nation's land, air, and water resources. Under a mandate of national environmental laws, the Agency strives to formulate and implement actions leading to a compatible balance between human activities and the ability of natural systems to support and nurture life. To meet this mandate, EPA's research program is providing data and technical support for solving environmental problems today and building a science knowledge base necessary to manage our ecological resources wisely, understand how pollutants affect our health, and prevent or reduce environmental risks in the future.

The National Risk Management Research Laboratory (NRMRL) is the Agency's center for investigation of technological and management approaches for preventing and reducing risks from pollution that threaten human health and the environment. The focus of the Laboratory's research program is on methods and their cost-effectiveness for prevention and control of pollution to air, land, water, and subsurface resources; protection of water quality in public water systems; remediation of contaminated sites, sediments and ground water; prevention and control of indoor air pollution; and restoration of ecosystems. NRMRL collaborates with both public and private sector partners to foster technologies that reduce the cost of compliance and to anticipate emerging problems. NRMRL's research provides solutions to environmental problems by: developing and promoting technologies that protect and improve the environment; advancing scientific and engineering information to support regulatory and policy decisions; and providing the technical support and information transfer to ensure implementation of environmental regulations and strategies at the national, state, and community levels.

This publication has been produced as a continued effort to support the EPA's mission of protecting human health and the environment. It is published and made available by EPA's Office of Research and Development to assist the user community and to link researchers with their clients.

Cynthia Sonich-Mullin, Director
National Risk Management Research Laboratory

TABLE OF CONTENTS

1.0 INTRODUCTION	4
1.1 SCOPE AND ORGANIZATION OF THE LITERATURE REVIEW	4
1.2 BACKGROUND	5
1.3 REGULATORY CONTEXT	6
1.4 ENVIRONMENTAL HEALTH CONTEXT.....	9
1.5 SUMMARY	10
2.0 SUMMARY OF LITERATURE SEARCH	11
2.1 APPROACH	11
2.2 LITERATURE SEARCH RESULTS.....	13
2.3 PCB-CONTAINING BUILDING MATERIALS.....	14
2.4 REMEDIATION METHODS.....	15
3.0 REMEDIATION METHODS	21
3.1 SOURCE REMOVAL	21
3.2 SOURCE MODIFICATION.....	30
3.3 ENGINEERING CONTROLS.....	36
3.4 ADMINISTRATIVE CONTROLS	42
4.0 CONCLUSIONS AND RECOMMENDATIONS	48
4.1 PCBs IN BUILDING MATERIALS	48
4.2 REMEDIATION METHODS.....	49
4.3 RECOMMENDATIONS	52
5.0 REFERENCES	53
APPENDIX A	64

LIST OF APPENDICES

Appendix A: Electronic Indices of Scientific and Technical Publications Queried

LIST OF BOXES

Box 1.1 40 CFR §761.3 – Definitions of PCB Waste

Box 3.1 Mitigation Efforts Described by Bent et al. (1994, 2000)

LIST OF TABLES

Table 1.1 Definitions of Clean-Up Related Terms from the U.S. Environmental Protection Agency

Table 1.2 Summary of Disposal Options and Clearance Criteria for PCB Wastes Specified in Code of Federal Regulations Title 40 Section 761

Table 1.3 Public Health Targets for PCBs in School Indoor Air (ng/m³) Suggested by EPA

Table 2.1 Keywords Used for Literature Search

Table 2.2 List of References by Literature Type

Table 2.3 PCB-Containing Building Materials and Exposure Media

Table 2.4 Description of Remediation Methods

Table 2.5 Key Elements of a Typical Work Plan for Mitigation of PCB-Containing Building Materials

Table 3.1 Source Removal Methods for Abatement of PCB-Containing Building Materials

Table 3.2 Summary of Tools and Methods for Caulk Removal

Table 3.3 Remediation Costs Reported by EH&E

Table 3.4 Summary of Source Modification Methods for Abatement of PCB-Containing Building Materials

Table 3.5 Remediation Cost Analysis of Concrete (porous) and Metal (non-porous) Surface Coated with PCB-containing Paint

Table 3.6 Summary of Engineering Controls Used for Mitigation of PCB-containing Building Materials

Table 3.7 Summary of Implementability, Effectiveness, and Aesthetics of Various Encapsulants

Table 4.2 Summary of Abatement and Mitigation Methods

LIST OF FIGURES

Figure 2.1 Framework for Methods to Remediate PCBs in Building Materials

Figure 3.1 Photograph of PCB-Containing Caulk Removal Using Hand Tools

Figure 3.2 Removal of Concrete Adjacent to Former Seam of PCB Caulking Laid Between Pre-Formed Concrete Panels

Figure 3.3 CAPSUR® Application on PCB-Contaminated Concrete Surface

Figure 3.4 Panel A —Photograph of Pre-Installment of Mini-Walls, Panel B—Photograph of Post-Installment of Mini-Walls

Figure 3.5 Indoor PCB Concentrations in Response to the Various Mitigation Methods

LIST OF ABBREVIATIONS AND ACRONYMS	
ACGIH	American Conference of Governmental Industrial Hygienists
AIHA	American Industrial Hygiene Association
AMTS	Activated Metal Treatment System
ASHRAE	American Society of Heating, Refrigerating and Air Conditioning Engineers
ASTM	American Society for Testing and Materials
AWMA	Air and Waste Management Association
BTS	Bimetallic Treatment System
CDC	Centers for Disease Control and Prevention
CFR	Code of Federal Regulations
DOD	Department of Defense
ECP	Electrochemical Peroxidation Process
EH&E	Environmental Health & Engineering, Inc.
EPA	U.S. Environmental Protection Agency
HEPA	High Efficiency Particulate Air
HVAC	Heating, Ventilation, and Air Conditioning
ISES	International Society for Exposure Science
ISEE	International Society for Environmental Epidemiology
ISIAQ	International Society for Indoor Air Quality
ng/μL	nanograms per microliter
ng/kg	nanograms per kilogram
ng/m ³	nanograms per cubic meter
NASA	National Aeronautics & Space Administration
NIOSH	National Institute for Occupational Safety and Health
PCB	Polychlorinated Biphenyl
PPE	Personal Protective Equipment
ppm	parts per million
PVC	Polyvinyl Chloride
RCRA	Resource Conservation & Recovery Act
SETAC	Society for Environmental Toxicology and Chemistry
TSCA	Toxic Substances Control Act
UCF	University of Central Florida
UNEP	United Nations Environment Programme
VOC	Volatile Organic Compound
ZVM	Zero-Valent Magnesium
μg/m ³	micrograms per cubic meter
μg/L	micrograms per liter

► 1.0 INTRODUCTION

Polychlorinated biphenyls (PCBs) are a class of persistent organochlorine chemicals that formerly had numerous commercial applications in the United States. Used primarily as an insulator in electrical equipment, PCBs were also a component of construction materials such as caulk, adhesives, and paints. Concentrations of PCBs in building materials frequently exceed levels authorized by U.S. regulations. A wide range of public and commercial buildings have been identified as being at risk of having PCB-containing materials.

In September 2009, the U.S. Environmental Protection Agency (EPA) provided initial guidance to property managers, particularly administrators of schools, on approaches to managing potential exposures to PCBs in building materials (EPA, 2011a). The guidance from EPA complements the requirements in Title 40 Part 761 of the Code of Federal Regulations for characterization and disposal of waste materials that contain PCBs. Managing potential exposures to PCBs and complying with regulatory requirements are priorities for property managers, and interest has grown about methods for remediation of PCBs in building materials.

Environmental Health & Engineering (EH&E) was retained by the EPA National Risk Management Laboratory to review the literature on remediation methods for PCB-containing building materials. The purpose of this report is to help EPA and other stakeholders identify the approaches in use today to control release of PCBs from building materials, protect public health, and meet regulatory criteria. The review of the literature is not intended as a guide to select the optimal method to remediate PCBs in a particular building, but rather to compile information on the performance of current methods and to provide recommendations for further development of remediation methods for PCBs in building materials.

1.1 SCOPE AND ORGANIZATION OF THE LITERATURE REVIEW

The scope of this report includes methods for remediation of non-liquid PCBs in building materials, although the topic of liquid PCBs in fluorescent light ballasts is also discussed.

Following terminology suggested by the EPA, *remediation* in the context of this report refers to removing PCBs from building materials or limiting their migration from sources in buildings. The remediation methods are divided into two categories – abatement and mitigation. *Abatement* refers to reducing the amount of PCBs in building materials and more broadly includes remediation methods that involve removing, handling or treating source materials. *Mitigation* refers to controlling exposure to PCBs released from building materials and more broadly includes methods that do not involve handling or direct manipulation of source materials. These working definitions are consistent with the clean-up related terminology suggested by EPA, which is reproduced in Table 1.1.

TABLE 1.1 Definitions of Clean-Up Related Terms from the U.S. Environmental Protection Agency	
Term	Definition from EPA
Abatement	Reducing the degree or intensity of, or eliminating, pollution
Mitigation	Measures taken to reduce adverse impacts on the environment
Remediation	1) Cleanup or other methods used to remove or contain a toxic spill or hazardous materials from a Superfund site. 2) For the Asbestos Hazardous Emergency Response program, abatement methods including evaluation, repair, enclosure, encapsulation, or removal of greater than 3 linear feet or square feet of asbestos-containing materials from building
Source: EPA, 2011b	

The remediation methods considered in this report are applicable to meeting regulatory standards for PCBs and for managing potential exposures to PCBs in building materials. The methods covered here also include both interim and permanent measures for managing PCBs in buildings.

To gather information on remediation methods within the scope of this review, a comprehensive search was conducted of all publicly available information from peer-reviewed scientific and technical journals, conference proceedings, reports by the U.S. federal and state governments, reports by academic institutions, and reports by international organizations. The search included documents published or released by June, 2011. The documents and resources identified by the literature search were reviewed, culled, and flagged for follow-up searches as warranted. These additional leads were investigated, thereby supplementing the initial list with new documents until a complete survey of the current literature was obtained.

1.2 BACKGROUND

PCBs comprise a class of 209 structurally-related chemicals (or congeners) that were widely used as a dielectric fluid in capacitors, transformers, and other electrical equipment beginning as early as 1929 (Rall, 1975). PCBs are well-known human and ecological hazards (ATSDR, 2000). Manufacturing, importation, and most uses of PCBs in the U.S. were prohibited under the Toxic Substances Control Act (15 U.S.C. Sec. 2601 et seq. 1976). Federal regulations that establish authorized uses and disposal practices for PCBs are stated in the Code of Federal Regulations, Title 40, Part 761 (40 CFR §761).

In addition to their use in electrical equipment, over 75 million kilograms of PCBs were reported to have been sold in the U.S. from 1958 through 1971 for use as plasticizers or as a component of numerous industrial products (NIOSH, 1975). These uses of PCBs were in “open-end” applications that include rubbers, synthetic resins, carbonless copy paper, wax extenders, cutting oils, pesticide extenders, inks, textile coatings, and other products (Hesse, 1975; EPA, 1976). Construction materials reported to have been manufactured with PCBs include caulk, adhesives, paints, floor finishes, and other items (see Section 2.3 for additional information). In this report, materials that are known or believed to have been manufactured with PCBs will be referred to as primary sources.

PCBs have also been used as an insulating liquid in ballasts for fluorescent lights. Older light ballasts filled with PCBs continue to be used in some public school buildings. Certain types of ballasts may leak upon reaching the end of their useful life (Staiff et al., 1974), providing a potential source of exposure to PCBs in buildings. Although non-liquid PCBs in building materials is the focus of this literature review, remediation of PCB-containing insulating fluids in light ballasts is discussed briefly.

A large number of buildings may be constructed with PCB-containing materials based on current information about PCB uses in building products. Over 800,000 government and non-government buildings that comprise 12 billion square feet of interior space are estimated to have been constructed between 1958 and 1971 (EIA, 2008). In addition, forty-six percent (46%) of schools in the U.S. (approximately 55,000 schools) are estimated to have been built during that time based on results from a survey of indoor air quality programs in schools (Moglia et al., 2006).

PCBs are persistent in the environment and are known to migrate from primary source materials to adjacent materials in buildings. Elevated concentrations of PCBs have been found in brick, mortar, concrete, foam board, and other items that are adjacent to primary source materials (Coghlan et al., 2002). The upper range of PCB levels in these materials has been reported to be approximately 5,000 ppm. Building materials that accumulate PCBs released from primary sources will be referred to as secondary sources in this report.

PCBs in building materials can also migrate to direct human exposure media including soil, indoor dust, and indoor air. PCB contamination in soil has been reported to extend up to a meter away from building envelopes constructed with PCB-containing caulk (Herrick et al., 2007). Remediation of building-related PCBs in soil has involved excavation of soil to a depth of two feet or more (TRC Environmental, 2010). Further discussion of soil contaminated with building-related PCBs is beyond the scope of this report. Settled dust in buildings constructed with PCB-containing caulk has also been reported to be enriched in PCBs (Chang et al., 2002). Analyses of aggregate exposure to PCBs indicate that indoor air can be the predominant pathway of exposure to PCBs in building materials (EPA, 2009c).

1.3 REGULATORY CONTEXT

The regulations in 40 CFR§761 define authorized uses of PCBs and types of PCB wastes for both liquid and non-liquid PCBs. The use of PCBs in fluorescent light ballasts notwithstanding, regulations for non-liquid uses of PCBs set forth in 40 CFR§761.3 are of greatest relevance to PCBs in building materials. Because PCBs in building materials are generally not an authorized use according to 40 CFR§761, achieving PCB levels that meet regulatory or risk-based criteria is therefore an important driver of remediation programs for impacted buildings. Background information on these driving forces is provided here; additional information is presented later in Sections 2 and 3.

Once a building material that contains an unauthorized use of PCBs is designated for disposal, the material is subject to classification as either *PCB Bulk Product Waste* or *PCB Remediation Waste*. The definitions of PCB Bulk Product Waste and PCB Remediation Waste are reproduced from

40 CFR §761.3 in Box 1.1. In brief, materials that were manufactured with PCBs, and that contain PCBs at levels equal to or greater than 50 ppm are subject to the requirements for PCB Bulk Product Waste. Materials that contain PCBs as a result of a release from primary sources are subject to the regulations for PCB Remediation Waste. These materials may include waste from clean-up activities, environmental media such as soil, and building components such as concrete and brick. In general, primary sources are typically identified as Bulk Product Waste and secondary sources are commonly determined to be PCB Remediation Waste. However, distinguishing bulk product waste from remediation waste can be challenging for some materials. Additional information on these terms can be found in Box 1.1.

Box 1.1 40 CFR §761.3 – Definitions of PCB Waste

>> **PCB bulk product waste** means waste derived from manufactured products containing PCBs in a non-liquid state, at any concentration where the concentration at the time of designation for disposal was ≥ 50 ppm PCBs. PCB bulk product waste does not include PCBs or PCB items regulated for disposal under §761.60(a) through (c), §761.61, §761.63, or §761.64. PCB bulk product waste includes, but is not limited to:

- (1) Non-liquid bulk wastes or debris from the demolition of buildings and other man-made structures manufactured, coated, or serviced with PCBs. PCB bulk product waste does not include debris from the demolition of buildings or other man-made structures that is contaminated by spills from regulated PCBs which have not been disposed of, decontaminated, or otherwise cleaned up in accordance with subpart D of this part.
- (2) PCB-containing wastes from the shredding of automobiles, household appliances, or industrial appliances.
- (3) Plastics (such as plastic insulation from wire or cable; radio, television and computer casings; vehicle parts; or furniture laminates); preformed or molded rubber parts and components; applied dried paints, varnishes, waxes or other similar coatings or sealants; caulking; adhesives; paper; Galbestos; sound deadening or other types of insulation; and felt or fabric products such as gaskets.
- (4) Fluorescent light ballasts containing PCBs in the potting material.

>> **PCB remediation waste** means waste containing PCBs as a result of a spill, release, or other unauthorized disposal, at the following concentrations: Materials disposed of prior to April 18, 1978, that are currently at concentrations ≥ 50 ppm PCBs, regardless of the concentration of the original spill; materials which are currently at any volume or concentration where the original source was ≥ 500 ppm PCBs beginning on April 18, 1978, or ≥ 50 ppm PCBs beginning on July 2, 1979; and materials which are currently at any concentration if the PCBs are spilled or released from a source not authorized for use under this part. PCB remediation waste means soil, rags, and other debris generated as a result of any PCB spill cleanup, including, but not limited to:

- (1) Environmental media containing PCBs, such as soil and gravel; dredged materials, such as sediments, settled sediment fines, and aqueous decantate from sediment.
- (2) Sewage sludge containing < 50 ppm PCBs and not in use according to §761.20(a)(4); PCB sewage sludge; commercial or industrial sludge contaminated as the result of a spill of PCBs including sludges located in or removed from any pollution control device; aqueous decantate from an industrial sludge.
- (3) Buildings and other man-made structures (such as concrete floors, wood floors, or walls contaminated from a leaking PCB or PCB-Contaminated Transformer), porous surfaces, and nonporous surfaces.

Disposal options for PCB Bulk Product Waste and clearance criteria for PCB Remediation Waste designated in 40 CFR§761 are provided in Table 1.2. Options for disposal of Bulk Product Waste include either removal of source materials, decontamination of source materials, or a risk-based disposal method approved by EPA. The criterion for a risk-based approval is that the proposed method will not pose an unreasonable risk of injury to health or the environment.

As shown in Table 1.2, the EPA regulations allow PCB Remediation Waste to be managed according to a method that is termed self-implementing on-site clean and disposal. This disposal options allows residual levels of PCB Remediation Waste to remain in a building. The amount of residual PCBs allowed depends on the use characteristics of the property and the disposition of the PCBs: (i) high occupancy versus low occupancy areas, (ii) bulk concentrations versus surface loading levels, and (iii) unrestricted land use versus a deed restriction. Although not detailed in the table, the regulations for PCB Remediation Waste also allow for performance-based disposal and risk-based disposal methods as approved by EPA.

Material	Definition	Disposal Options	Criteria	
PCB Bulk Product Waste 40 CFR§761.62	Waste derived from manufactured products in non-liquid state, greater than 50 ppm at the time of disposal. (40 CFR §761.3)	Performance-based disposal by landfill, incineration or decontamination	RCRA-permitted facility	
		Risk-based approval	Will not pose an unreasonable risk of injury to health or the environment	
PCB Remediation Waste 40 CFR§761.61(a)	Waste containing PCBs as a result of a spill, release, or other unauthorized disposal. (40 CFR §761.3)	Self-implementing on-site cleanup and disposal	High-Occupancy	
			Bulk	<ul style="list-style-type: none"> • ≤1 ppm • >1 to ≤10 ppm if site covered with appropriate cap (deed restriction)
			Porous	<ul style="list-style-type: none"> • ≤1 ppm • >1 to ≤10 ppm if site covered with appropriate cap (deed restriction)
			Nonporous	• ≤10 µg/100 cm ²
			Low-Occupancy	
			Bulk	<ul style="list-style-type: none"> • ≤25 ppm • >25 ppm to ≤50 ppm if secured by fence (deed restriction) • >25 ppm to <100 ppm with appropriate cap (deed restriction)
			Porous	<ul style="list-style-type: none"> • ≤25 ppm • >25 ppm to ≤50 ppm if secured by fence (deed restriction) • >25 ppm to <100 ppm with appropriate cap (deed restriction)
Nonporous	• <100 µg /100 cm ²			

The PCB regulations do not specify a schedule for determination of PCB-containing materials as waste or a timeline for remediation of PCB waste. This aspect of the regulations provides the opportunity for property owners to identify the remediation strategy that is most appropriate for a building with PCB-containing materials. In some cases, conditions warrant control of PCB releases to the environment and the subsequent potential for human exposure while options for permanent remedies are evaluated. Recommendations for methods to control exposure to PCBs in building materials on an interim basis are available from EPA (EPA, 2009b) and are also discussed in Section 3.3 and 3.4.

1.4 ENVIRONMENTAL HEALTH CONTEXT

In addition to accumulating in construction materials through sorption and migration, PCBs that mobilize from building products can also be present in direct human exposure media including soil, indoor dust, and indoor air (Coghlan et al., 2002; Herrick et al., 2007). PCBs in soil and dust are subject to the PCB regulations for bulk product waste and remediation waste however the regulations are silent on limits for PCBs in indoor air of buildings.

Recently, public health targets for school-year average concentrations of PCBs in the indoor air of schools have been suggested by EPA (EPA, 2009c). As shown in Table 1.3, these suggested public health targets range from 70 ng/m³ for children less than 2 years of age to 600 ng/m³ for high school students. Site-specific assessments that consider local conditions such as background intake of PCBs, time-location patterns at the school, and the mixture of PCB congeners present in the air have also been used to derive targets for PCB concentrations in indoor air of schools (e.g., MacIntosh et al., 2011).

In some cases, measured concentrations of PCBs in indoor air of buildings with PCB-containing building materials have exceeded the levels suggested by EPA or those derived from site-specific assessments. For instance, indoor air concentrations of total PCBs have been reported to reach 5,000 ng/m³ in U.S. buildings constructed with PCB-containing materials (TRC Engineers, 2010b). Likewise, concentrations greater than 20,000 ng/m³ have been reported for buildings in Europe (Liebl et al., 2004; Schwenk et al., 2002). In comparison, PCBs in outdoor air are generally less than 1 ng/m³ (ATSDR, 2000; Li et al., 2010).

As suggested by the preceding information, PCBs in indoor air can also be a driving force for remediation of PCB-containing building materials, regardless of whether regulatory standards for PCBs in bulk materials are met or not. As described in Section 3, a variety of engineering and administrative controls are available to manage levels of PCBs in indoor air on both a permanent and interim basis.

Age 1-<2 yr	Age 2-<3 yr	Age 3-<6 yr	Age 6-<12yr Elementary School	Age 12-<15 yr Middle School	Age 15-<19 yr High School	Age 19+ Adult
70	70	100	300	450	600	450
PCB polychlorinated biphenyl ng/m³ nanograms per cubic meter * Assuming a background scenario of no significant PCB contamination in building materials and average exposure from other sources, these concentrations should keep total exposure below the reference dose of 20 ng PCB/kg-day. Source: EPA, 2009						

1.5 SUMMARY

PCBs are a class of compounds that had important commercial uses in the U.S. prior to their ban under TSCA due to their association with adverse human and ecological impacts. Primarily used as a dielectric fluid in capacitors, transformers, and other electrical equipment, PCBs were also used as a component of some non-liquid building products including caulking, adhesives, paints, floor finishes, fluorescent light ballasts and other items.

Over 75 million kilograms of PCBs were sold for use as plasticizers or as a component of numerous industrial products from 1958 to 1971, thus, a large number of buildings constructed are at risk of having PCB-containing materials. Understanding available remediation strategies for PCB-containing building materials, therefore, is a critical issue for owners of public and private buildings.

PCBs can be introduced into building materials and media in three primary ways. First, caulk, adhesives, and other products manufactured with PCBs are primary sources of PCBs in buildings. Second, PCBs released from primary sources can accumulate in other building materials over time, creating secondary sources of PCB contamination in a building. Finally, PCBs can be released from primary and secondary sources and subsequently enter indoor air, dust, and soil.

Regulatory standards for PCBs in 40 CFR§761 establish authorized uses, disposal practices, and allowable limits for PCBs in materials. Compliance with the unauthorized use provisions of the regulations is an important driver of remediation programs for PCBs in building materials. Although not addressed in the regulations, PCB concentrations in indoor air of buildings can also be a factor in decisions to control release of PCBs from building materials.

Property owners and managers, regulatory authorities, practitioners, and other stakeholders need information on approaches for managing PCBs in buildings. This report provides a review of literature published on abatement and mitigation of PCBs in building materials. Methods for managing or remediating PCBs in buildings are identified and discussed in the context of the information available on performance, cost, and associated waste.

► 2.0 SUMMARY OF LITERATURE SEARCH

In accordance with the statement of work for this contract, a summary of the literature search and results are presented in this section of the report. The summary includes a brief description of the search methodology, a listing of PCB-containing materials identified in the literature, and an overview of the remediation methods discussed in those reports.

2.1 APPROACH

To gather information on remediation methods within the scope of this review, a comprehensive search was conducted of all publicly available technical information from peer-reviewed scientific and technical journals, conference proceedings, reports by the U.S. federal and state governments, reports by academic institutions, and reports by international organizations. The search included documents published or released as of June 2011. The documents and resources identified by the searches were reviewed, culled, and flagged for follow-up searches as warranted. These additional leads were investigated, thereby supplementing the initial list with new documents until a complete survey of the current literature was obtained.

The initial literature search on PCB remediation methods focused on peer-reviewed journal articles. The search included electronic indices such as the Science Citation Index, Web of Science, and MedLine (Appendix A, Table A.1). Indices of scientific and technical publications and other electronic resources were queried using multiple keywords representing four search categories; i) chemical, ii) remediation, iii) building type, and iv) building materials.

The representative keywords are provided in Table 2.1.

Keywords of the same search category were connected with “OR”, and search categories were connected with “AND” in the search. Abstracts for non-English articles were professionally translated into English and evaluated to determine whether the document warranted complete translation.

Search Category	Keywords
Chemical	PCBs, Polychlorinated Biphenyl
Mitigation	abatement, encapsulation, excavation, extraction, management, mitigation, modification, remediation, treatment
Building Type	building, construction, house, residence, school, university
Building Material	coat, exterior, floor, foam, interior, light ballast, lighting, metal, seal, wall, wire

The grey literature such as white papers, technical reports, and presentations were also searched and included if deemed appropriate. The grey literature search was conducted through web-based search engines, using the key words provided in Table 2.1. In addition, searches of proceedings from relevant scientific conferences were also conducted, including American Conference of Governmental Industrial Hygienists (ACGIH); American Industrial Hygiene Association (AIHA); American Society of Heating, Refrigeration and Air Conditioning Engineers (ASHRAE); American Society for Testing and Materials (ASTM), Air and Waste Management Association (AWMA); International Society for Indoor Air Quality (ISIAQ); Materials Research Society; Society for

Environmental Toxicology and Chemistry (SETAC); International Society for Exposure Science (ISES); International Society for Environmental Epidemiology (ISEE), and the annual Dioxin conference meetings.

2.2 LITERATURE SEARCH RESULTS

In total, 92 documents were obtained. These included 11 conference proceedings, 2 PowerPoint presentations, 34 reports of consulting firms and government agencies, 31 peer-reviewed journal articles and 14 websites (Table 2.2). This set of literature identifies a wide variety of building materials reported to contain PCBs, either from the time of manufacture or through sorption over time. Numerous mitigation methods are also discussed in the literature. However, only a small number of these documents also discussed the efficacy or costs of the mitigation methods. Evaluation of performance for any one method is complicated by the fact that multiple mitigation methods are often employed simultaneously to manage risks associated with PCBs in building materials. This management practice limits the ability of the current review to identify precise descriptions of performance for individual methods.

Literature Type	Number of Documents Found	References
Conference Proceedings	11	Chang, 2002; Coghlan, 2002; Fragala, 2010; Hamel, 2009; Ljung, 2002; MacIntosh, 2011; Mitchell, 2001; Novaes-Card, 2010; Quinn, 2010; Scadden, 2001; Tanner, 2010
Power Point Presentations	2	TEI, 2009; VanSchalkwyk, 2009
Technical Reports (Consulting firms/ Government agencies)	34	ATC, 2010; EH&E, 2011a-b; EH&E, 2010a-f; EH&E, 2007a-b; NIOSH, 1975; NRC, 1976; Ruiz, 2010; SAIC, 1992; TRC Engineers, 2010a-c; TRC Environmental, 2010; EPA, 2010a; EPA, 2007; EPA, 1976; UNEP, 1999; W&C, 2010a-f; W&C, 2009; W&C, 2008a-c; W&C, 2007
Peer-reviewed Journal Articles	31	Andersson, 2004; Blifanz, 1993; Barkley, 1990; Bent, 1994; Bent, 2000; Bente, 1992; Bleeker, 1999; Broadhurst, 1972; Funakawa, 2002; Gabrio, 2000; Heinzow, 2007; Heinzow, 2004; Hellman, 2001; Herrick, 2010; Herrick, 2007; Herrick, 2004; Jartun, 2009a-b; Kohler, 2005; Kontsas, 2004; Kume, 2008; Kuusisto, 2007; Liebl, 2004; MacLeod, 1981; Persson, 2005; Pizarro, 2002; Priha, 2005; Robson, 2010; Rudel, 2008; Schwenk, 2002; Sundahl, 1999
Websites	14	CDC, 1987; LPS, 2010; NYC DOE, 2010; EPA, 2011c; EPA, 2010b-g; EPA, 2009b-c; EPA, 1993; URI, 2001

The remediation methods discussed in these documents focus on primary source materials in buildings, including ceiling tiles, wall paints, and especially sealants. A smaller number of reports discussed mitigation of secondary sources and techniques for mitigating potential exposure to PCBs released from building materials to indoor air. Work plans, an important management tool for remediation programs, were the topic of a few of the reports.

The remediation methods considered in this report are applicable to meeting regulatory standards for PCBs and for managing potential exposures to PCBs in building materials. The methods covered here also include both interim and permanent measures for managing PCBs in buildings.

The breadth and depth of literature available at this time is consistent with an environmental health topic that has only recently received close attention from the regulatory community and stakeholders in the U.S. The initial notice from EPA regarding PCBs in school buildings was issued in September 2009 (EPA, 2011a), 9 months prior to initiation of the literature search.

2.3 PCB-CONTAINING BUILDING MATERIALS

A wide variety of building materials that contain PCBs are described in peer-reviewed papers and case reports identified by the literature search. Several of the references stress the importance of building inspections to provide a preliminary assessment of the nature and extent of PCB-containing materials, followed by appropriate sampling and analysis of suspect materials and building components (Fragala, 2010; TEI, 2009; W&C, 2008c). This general approach has been demonstrated to be useful for identifying PCB-containing materials, developing inventories of materials that meet criteria for unauthorized uses under the PCB regulations, and source materials that are important contributors to PCBs in indoor air and other pathways of potential exposure. Procedures for building characterization specific to determination of unauthorized use materials are outlined in Subparts N and R of 40 CFR§761. Further treatment of evaluation procedures is outside the scope of this report but should be considered as part of further work.

A list of building materials that have been reported to contain PCBs is provided in Table 2.3. The building materials were grouped according to whether or not they were likely to have been manufactured with PCBs. Building materials manufactured with PCBs would have been part of a broad category of sales for uses that have been termed open-end or open-system applications (EPA, 1976; NRC, 1979). The largest open-end use of PCBs was in plasticizer applications and miscellaneous industrial products (NIOSH, 1975; EPA, 1976). Plasticizers are chemicals added to materials to make them or keep them soft or pliable. Construction products reported to have been manufactured with PCBs include adhesives, caulk, ceiling tiles, paint, and sealants (Broadhurst, 1972; NIOSH, 1975; EPA, 1976; CDC, 1987).

Among measurements of PCBs identified by the literature search, caulk, applied primarily to exterior joints, was the building material most frequently reported to contain PCBs. Caulk also had the highest reported concentration of PCBs with levels commonly in the range of 1,000 to 100,000 ppm and ranging up to approximately 750,000 ppm (ATC, 2010). The mixture of PCBs in caulk most frequently consisted of Aroclor 1254 and Aroclor 1248 (EH&E, 2010f; ATC, 2010; W&C, 2007). Paint and adhesives such as floor tile mastic were also frequently reported to contain PCBs (Bent et al., 1994; TRC Environmental, 2010).

Porous materials such as concrete and brick were frequently reported as secondary sources of PCBs. As noted earlier in this report, porous materials can absorb PCBs when adjacent to caulk or other

materials manufactured with elevated concentrations of PCBs (W&C, 2010a; W&C, 2010d; W&C, 2010e; W&C, 2010f; W&C, 2007). PCBs can transfer from secondary sources to other materials as well, including products intended to inhibit migration of PCBs. For instance, silicone caulk applied directly on PCB-containing caulk has been reported to absorb PCBs and in one building eventually reached concentrations up to 4,200 ppm (W&C, 2010c; EH&E, 2007b; W&C, 2010f).

Direct human exposure media, such as indoor air, that have been reported to be impacted by PCBs released from building materials are also noted in Table 2.3.

2.4 REMEDIATION METHODS

The literature search identified a wide range of remediation methods for PCBs in building materials. Although diverse in purpose and approach, the methods can be grouped according to terminology suggested by the EPA for environmental clean-up activities. The EPA terms that define these groups were presented in Table 1.1.

In this report, *remediation* is an overarching term that encompasses removing PCBs from a building or limiting the migration of PCBs from sources in a building. Two general approaches to remediation are recognized here – abatement and mitigation. *Abatement* refers to reducing the amount of PCBs in building materials. *Mitigation* is a complement to abatement and refers to controlling exposure to PCBs released from building materials without removing PCBs from source materials in a building.

A conceptual framework for organizing the groups of remediation methods is illustrated in Figure 2.1. In this framework, abatement is distinguished from mitigation in that the objective of abatement is to reduce the mass of PCBs or PCB-containing materials in a building, while the objective of mitigation is to limit release of PCBs from building materials or their transfer to the environment and locations where people may be exposed. Abatement activities involve handling, treating, or directly contacting PCB-containing materials in a manner that removes primary and secondary source materials from a building or lowers the amount of PCBs in building materials through chemical degradation or extraction techniques. Mitigation actions do not involve modifying source materials, but instead may be intended to block pathways of PCB transport, dilute concentrations of PCBs in exposure media, or establish uses of building space that minimize exposure to building-related PCBs.

Details of the various remediation methods are described in Section 3 and a brief summary of individual remediation methods are provided in Table 2.3.

2.4.1 Abatement

In general, abatement methods are intended to provide a permanent remedy to unauthorized or undesired uses of PCBs in building materials. A permanent remedy can be achieved by removing PCB-containing materials from a building or reducing the amount of PCBs in a material below the clearance criteria for residual PCBs as defined in 40 CFR 5761 (see Table 1.2). A summary of information identified on abatement achieved by source removal and source modification methods follows.

TABLE 2.3 PCB Containing Building Materials and Exposure Media


Material	Maximum Concentration from Buildings	References Reporting PCB Contaminated Materials		
Primary Source Material (possibly manufactured with PCB)				
Caulking (Sealant, Plaster)	959 – 752,000 ppm	(a), (b), (d), (e), (f), (g), (i), (j), (k), (l), (q), (r), (t), (w), (aa), (bb), (cc), (ff), (ii), (jj), (kk), (ll), (mm), (nn)		
Adhesives/Mastic	3.9 – 3,100 ppm	(d), (e), (g), (l), (hh), (ii), (jj)		
Surface Coating	140 – 255 ppm	(d), (g), (dd), (ii)		
Paint	0.7 – 89,000 ppm	(a), (e), (g), (h), (u), (v), (y), (hh), (ii)		
Ceiling Tiles	57 – 51,000 ppm	(g),(h),(l)		
Glazing	Up to 100% liquid PCB	(l), (jj)		
Light Ballast	1,200,000 ppm	(m)		
Electric Wiring	14 ppm	(g)		
Secondary Source Material (probably not manufactured with PCB)				
Insulation Materials	0.2 – 310 ppm	(b), (i), (l), (ee), (hh)		
Backer Rod	99,000 ppm	(b)		
Gaskets	4,300 ppm	(i)		
Cove Base	170 ppm	(l)		
Polyurethane foam (furniture)	47 – 50 ppm	(g),(ii)		
Wood	380 ppm	(g)		
Brick/Mortar/Cinder Block	2.8 – 1,100 ppm	(b), (l), (y), (kk)		
Asphalt	140 ppm	(k)		
Stone (granite, limestone, marble, etc.)	130 ppm	(ll), (mm), (nn)		
Concrete	53 – 17,000 ppm	(b), (e), (g), (k), (v), (y), (ff), (kk), (mm), (nn)		
Non-Porous Materials				
Metals Surfaces	48 µg/100 cm ²	(g),(k),(kk)		
Door Frame	102 ppm	(hh)		
Railing	70 ppm	(hh)		
Exposure Media				
Soil/Sediment/Sand	0.1 – 581 ppm	(a), (l), (s), (u), (bb), (kk), (ll), (mm), (nn)		
Settled Dust	120 µg/100 cm ² , <1.5 - 190 ppm	(l), (dd), (jj)		
Indoor Air	35 – 24,000 ng/m ³	(c), (d), (e), (f), (i), (j), (l), (n), (o), (p), (w), (x), (y), (z), (ee), (ff), (gg), (ii)		
References				
(a) Andersson, 2004	(j) Gabrio, 2000	(s) Herrick, 2007	(bb) Priha, 2005	(jj) URI, 2001
(b) ATC, 2010	(k) EH&E, 2007b	(t) Herrick, 2010	(cc) Robson, 2010	(kk) W&C, 2007
(c) Balfanz, 1993	(l) EH&E, 2010f	(u) Jartun, 2009a	(dd) Rudel, 2008	(ll) W&C, 2010a
(d) Bent, 1994	(m) EPA, 2011c	(v) Jartun, 2009b	(ee) Schwenk, 2002	(mm) W&C, 2010c
(e) Bent, 2000	(n) Funakawa, 2002	(w) Kohler, 2005	(ff) Sundahl, 1999	(nn) W&C, 2010e-f
(f) Benthe, 1992	(o) Heinzow, 2004	(x) Koutsas, 2004	(gg) TRC Engineers, 2010b	
(g) Bleeker, 1999	(p) Heinzow, 2007	(y) Kuusisto, 2007	(hh) TRC Engineers, 2010a	
(h) CDC, 1987	(q) Hellman, 2001	(z) Liebl, 2004	(ii) TRC Environmental,	
(i) Chang, 2002	(r) Herrick, 2004	(aa) Persson, 2005	2010	

As shown in Figure 2.1, source removal methods include physical removal and on-site decontamination of PCB-containing materials. Physical removal involves displacement of bulk material that contains PCBs followed by disposal according to applicable state and federal regulations. In the case of PCB caulking, hand tools such as utility knife, putty knife, scraper, ripping chisel, and bush hammer are typically used to pry beads of caulk from the seams in manageable lengths. Various types of abrasive blasting techniques are physical removal methods that have been applied to surface coatings that contain elevated concentrations of PCBs. In both cases, the removed caulk or surface coating is placed in sealed containers which are stored in a covered roll-off and subsequently disposed of as hazardous waste.

In addition to physical removal of PCB-containing materials, source removal can also be achieved through on-site decontamination. Several products and techniques for chemical degradation of PCBs in bulk product waste and remediation waste materials are described in the literature. In general, the products are applied to PCB-containing materials as a slurry or paste, covered by an overlying material, and left in place for days to weeks as required by the kinetics of the degradation reactions. Spent product and degradation products are waste byproducts of the process.

Old fluorescent light ballasts that were manufactured with PCBs remain in use in some buildings and their remediation constitutes a special case of source removal. Detailed source removal procedures (clean-up and decontamination) for a leak, including management and disposal of wastes from PCB-containing ballasts, are outlined in the PCB regulations and summarized in Section 3.

FIGURE 2.1 Framework for Methods to Remediate PCBs in Building Materials

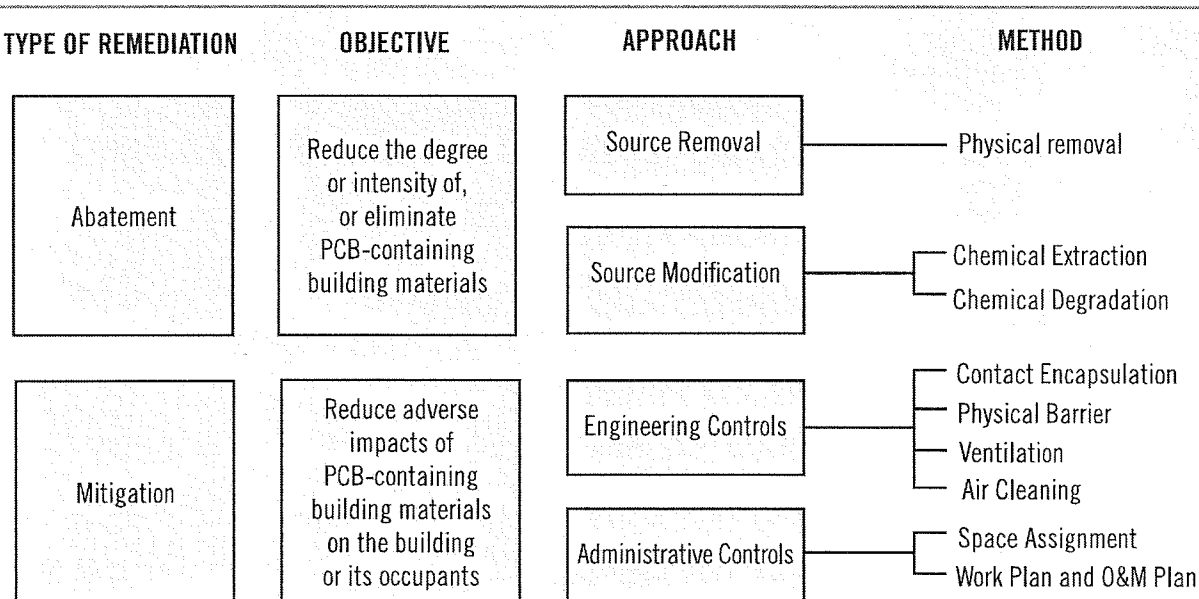

Remediation Method	Approach	Method	Description
Abatement	Source Removal	Physical Removal	Remove PCB-containing building materials using hand or mechanical tools
	Source Modification	Chemical Extraction	Apply a solvent that washes PCBs from building materials
		Chemical Degradation	Treat building materials with a chemical product that transforms PCBs in into less hazardous substances
Mitigation	Engineering Controls	Encapsulation	Apply a low permeability film or sealant directly to PCB-containing materials
		Physical Barrier	Separate PCB-containing materials from other (e.g., occupied) areas of a building
		Ventilation	Deliver PCB-free air to the interior of a building to control PCB concentrations in indoor air
		Air Cleaning	Operate a fan-operated device equipped with activated charcoal or other filtration media for which PCBs have high affinity
	Administrative Controls	Space Assignment	Use risk-based criteria to assign space to occupants of a building
		Work Plan and O&M Plan	Implement procedures and policies that detail how PCBs in building materials will be managed so as not to present an unreasonable risk of injury to health or the environment

2.4.2 Mitigation

Mitigation generally refers to controlling impacts of building material-related PCBs without actually removing PCBs from source materials. Mitigation methods can provide interim measures of control such that PCBs in building material do not pose an unreasonable risk of injury to human health and the environment. Accordingly, interim measures are typically planned and implemented to provide an equivalent level of protection to permanent measures. Mitigation methods can also be a component of activity undertaken following an abatement action or as part of a management in place program for residual PCBs in building materials.

As described below, engineering and administrative controls implemented alone or in combination can be effective at mitigating releases of PCBs to the environment and limiting exposure.

Engineering Controls

Engineering controls involve changes to the physical conditions of a building that reduce the magnitude of potential uncontrolled releases of PCBs and corresponding exposure. These controls can take many forms but are principally contact encapsulation; physical barriers; ventilation; and air cleaning.

Contact encapsulation refers to covering PCB-containing materials with an impermeable film or sealant. The sealant serves to reduce potential for dermal contact with PCBs and to retard release of PCB-containing materials or PCBs through weathering, mechanical degradation, or volatilization.

Contact encapsulation is described in the literature as a mitigation method for PCB-containing caulk, paint, adhesive, and other materials. Numerous encapsulants are described in the literature and include certain types of tape, sealants, and epoxies. Details about these methods are provided in Section 3.3.1.

Physical barriers constructed to separate areas with PCB-containing building materials from other areas of a building are another type of engineering control. In some cases, physical barriers such as fences and interior walls can be erected to prevent building occupants from coming into direct contact with PCB-containing building materials. For example a simple plastic mesh snow fence can be placed around the perimeter of a building façade to prevent people from approaching or contacting PCB-containing caulk or paint on the exterior face of the building. In other cases, physical barriers can be used to minimize transport of PCB vapors from source materials to occupied areas of a building. Barriers to control vapor transport include sealants or foam applied to joints of building features that form interstitial spaces which include PCB-containing materials. Examples of interstitial spaces that may enclose PCB-containing materials include aluminum framing around the panels of a curtain wall sealed with PCB caulk or wallboard covers over structural beams that are sealed with PCB caulk.

Ventilation with outdoor air and cleaning of indoor air are engineering controls that can be used to modify concentrations of PCBs in indoor air that are associated with volatilization from PCB-containing materials. Improvements or upgrades to existing ventilation systems have been shown to be effective at lowering concentrations of PCBs in indoor air. However, the cost of heating and cooling outdoor air can be a practical constraint on implementation of this mitigation method. Operation of air cleaners equipped with activated charcoal filters was described as effective at lowering PCB levels in indoor air in one report identified by the literature search (EH&E, 2010c). Additional research is needed to evaluate the role of air cleaning as a long-term remedy for managing exposures to building-related PCBs.

Administrative Controls

Administrative controls involve changes to the use or maintenance of a building that reduce the magnitude of potential occupant exposures to PCBs or the likelihood of uncontrolled releases of PCBs from source materials. A space assignment plan that places building occupants in locations that yield exposures below established targets for indoor air or other media is an example of an administrative control. Similarly, adoption of an operation and maintenance plan for residual PCBs in building materials as part of an overall facility management program can be effective at confirming the continued performance of other remediation methods. As described in Section 3, the parameters of administrative controls can be informed by a site-specific assessment of PCB exposure and risk.

The literature search also identified work plans as an important form of administrative control. Work plans are designed to ensure that remediation efforts comply with all applicable rules and regulations and that the planned remediation activities do not pose an unreasonable risk of injury to human health and the environment.

Work plans are necessarily site-specific, yet all work plans strive to ensure consistent and effective management of a remediation action for PCB-containing building materials. Specification of the flow of work is critical for containment of PCBs during remediation. The work flow for a project typically includes: site protection and isolation, source removal, surface cleaning, material decontamination, inspection and testing of non-porous surfaces, source modification, testing and verification, site restoration, project acceptance, and completion.

The key elements of a typical work plan for remediation of PCB-containing building materials are provided in Table 2.5. The remediation methods described in Section 3 would typically appear prominently in sections of a work plan that address scope, schedule, and procedures. More detailed information on the major components of work plans is presented in Section 3.4.2.

Applicability of Mitigation Methods

Mitigation of impacts arising from PCBs in building materials rather than abatement of the PCB-containing materials strikes a balance among (i) disruption of building operations, (ii) cost of abatement, (iii) regulatory requirements and (iv) risk to health and the environment.

Disruption associated with abatement of PCB-containing building materials can favor mitigation over abatement. As described in Sections 3.1, methods commonly used to remove or modify PCB-containing materials can involve construction practices that generate noise, dust, gases, and require involved containment procedures similar to those used for asbestos. Destructive procedures for removing concrete, brick, mortar, and other substrates that have absorbed PCBs from source material such as caulk are often the most disruptive. Abatement activities are often undertaken most efficiently in unoccupied areas of a building and may require the relocation of building occupants. Disruption of building operations may be greatest when a temporary space for use by building occupants, i.e., swing space, is not available. Therefore, mitigation approaches that limit exposure to PCBs in building materials can help organizations maintain business continuity and control costs.

TABLE 2.5 Key Elements of a Typical Work Plan for Mitigation of PCB-Containing Building Materials	
Case Narrative	Description of the building, presentation of PCBs in building materials, and overview of abatement goals
Regulations, Permits, and Qualifications	Identification of applicable regulations and corresponding permits and certifications required to perform the abatement plan
Scope and Schedule	Identification of materials to be abated, overview of mitigation methods, and forecast of work schedule
Execution Plan	Description of work flow ranging from site preparations through disposal
Abatement Procedures	Detailed description of procedures for source removal, source modification and, if planned, management options
Storage and Disposal	Statement of plans for storage and disposal of PCB bulk product and remediation waste
Abatement Completion Acceptance Criteria	Identification of performance criteria and evaluation procedures for the mitigation actions
Health and Safety	Plan to ensure health and safety of abatement contractors, visitors to the site, and occupants of the building

As shown in Table 1.2, the regulatory framework for PCBs includes risk-based approvals that appear to allow PCB-containing materials to be managed in place on a temporary basis. Based on information identified by the literature search, risk-based approvals are made on a case-by-case basis and follow the generally accepted procedures for quantitative analyses of cancer and non-cancer risks for PCBs.

The extent of health risk posed by leaving PCB-containing materials in place for a pre-defined period of time is a core consideration in a decision about the degree to engage in abatement or mitigation. The potential for direct contact with PCB bulk product waste or other PCB-containing materials should be part of any such decision. PCB-containing materials in building facades above ground-level often present limited opportunity for direct contact in most cases and may be amenable to mitigation. As noted earlier in this section, physical barriers can prevent direct contact with PCBs in building materials at ground level or indoors. Physical barriers can limit transfer of PCB vapors to indoor locations as well. A mitigation program can also include ventilation strategies to transfer PCBs from indoor air to outdoor air and thereby control inhalation exposures indoors.

The response to discovery of PCB-containing materials in an elementary school provides an illustrative example of mitigation as an interim remedy (EH&E, 2010a-f). The construction of the approximately 65,000 square foot, single story building in 1961 included curtain walls that contained composite panels held within aluminum framing by PCB-containing caulk. Approximately 500 linear feet of caulk was exposed along both the interior and exterior face of the composite panels in each classroom. Potential pathways of exposure to PCBs associated with the caulk included direct contact with caulk inside and outside of the building as well as inhalation of PCBs volatilized to indoor air. Children under 6 years old were moved to classrooms in a masonry addition of the school without PCB-containing materials. Physical barriers, including bi-layer sealants, gypsum board walls, and fences constructed over the interior and exterior caulk, prevented direct contact with the PCB-containing material. Modifications to the ventilation system led to further control of PCB levels in indoor air. Abatement activities were undertaken primarily when school was not in session in order to minimize disruption of education. As a result of these combined efforts, residual PCB exposures were brought below risk-based tolerances, disruption of the educational mission was minimized, and costs were controlled without removing the source material or demolishing and rebuilding large portions of the building.

► 3.0 REMEDIATION METHODS

The literature search identified a wide range of manual, mechanical, chemical, engineering, and management techniques to effect source removal, source modification, and control of PCB exposure. Each method is described in the remainder of this section following the framework for remediation methods presented in Section 2.4. Where available, information on performance and cost is provided as well.

3.1 SOURCE REMOVAL


3.1.1 Physical Removal of Bulk Materials

Physical removal methods involve the direct removal of PCB-contaminated materials. Physical removal is often the remediation approach of choice for caulk, porous materials (e.g., concrete, bricks), paints, ceiling tiles, and other bulk materials. Physical removal is generally recognized as an effective remediation measure, and can be performed using manual or mechanical techniques. A summary of physical removal methods for bulk materials is provided in Table 3.1.

Manual methods are based on direct handling of PCB-containing materials by abatement contractors or the use of hand tools. Manual methods are often favored over mechanical methods because they typically produce substantially lower emissions of dust and debris, noise, vibration, and odor (VanSchalkwyk, 2009). Manual methods are most applicable to discrete building materials that are not chemically bonded to adjacent materials. For example, manual removal is often the first step in abatement of PCB-containing caulk from around the exterior of window frames and between concrete panels. Hand tools and direct manipulation are also useful for removing certain materials that may absorb PCBs over time such as foam insulation, cove base, and ceiling tiles. In contrast, manual removal methods are less amenable to PCB-containing films such as paint. A photograph of abatement contractors in appropriate protective measures during remediation work is presented in Figure 3.1.

Direct bulk removal for PCB-containing paint can include the complete removal of all wallboard that has been painted. For cases where the paint cannot be removed without damaging the structural stability of the external wall, a “false wall” can be constructed over these painted external walls to prevent any direct contact with the existing

FIGURE 3.1 Photograph of PCB-Containing Caulk Removal Using Hand Tools

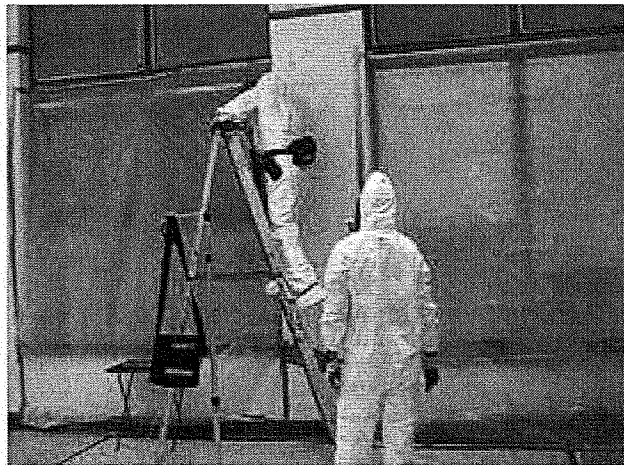

Source: EPA, 2010d

TABLE 3.1 Source Removal Methods for Abatement of PCB-Containing Building Materials				
Method	Description	Example	Applied Building Materials	References*
Bulk removal	Remove using hand tools	utility knife, scraper, ripping chisel, putty knife, bush hammer, hammer and chisel	Caulk, porous materials (concrete, brick, granite), non-porous materials (metal), soil, paint	(a), (b), (c), (d), (e), (f), (g), (h), (i), (j)
Sandblasting	Most commonly used techniques where PCB contamination is limited to the upper 0.5 centimeters of porous media such as concrete. Sandblasting involves blasting fine grains of abrasive sand onto the PCB contaminated surface to strip away surface coatings and remove the porous material below. Shot blasting involves shooting varying sizes of metal shot against the surface and is more effective at bulk material removal. The shot is recovered in the process using a specially fitted vacuum system that separates the shot from PCB-contaminated residue.		Paint, concrete	(k), (l), (e)
Shot blasting				(k)
Bead blasting	Process of removing surface deposits by applying fine glass beads at a high pressure without damaging the surface.		Concrete	(e)
Hydro blasting	Use high pressure (i.e. 1,000 to 6,000 pounds per sq inch) washing of building walls, ceilings, and equipment surfaces. High pressure water is sprayed against the PCB contaminated surfaces, and the wash water is then collected and disposed of. Hydro blasting can be especially effective for removing paint and coating layers. Under very high pressure it can also be used to cut and remove porous media such as concrete, but is generally less effective and results in more waste (i.e. contaminated water) than other available methods.		Paint, concrete	(e), (k)
CO ₂ blasting	Pellets of frozen CO ₂ are blasted against the affected surface.		Paint, caulk	(h), (j), (k)
Scarification	Scarifying and scabbling are more applicable where PCBs extend deeper into the porous material (i.e., 1 to 5 cm penetration in concrete). Scarifiers contain a helical rotating cutting tool that is attached to a tractor or large mobile roller and used to remove a layer of concrete. Scabblers use small, high-pressure impact pistons to sequentially break up the concrete. Scabblers are generally smaller than scarifying units and have a lower concrete removal rate, but scabblers are more adaptable to different indoor environments. Both devices are able to shave off from 1/16 inch to 1/8 inch of concrete per pass.		Concrete	(b), (k), (m)
Scabblers				(k), (m)
Saw cutting	Process of controlled sawing, drilling, and removal of concrete using special saws that use diamond impregnated blades. Cutting leaves a smooth finish and utilizes water so as to not create any dust.		Concrete, caulk	(b), (c), (j), (m),
Grinders	Use horizontally rotating discs to level, smooth or clean the top surface of a concrete slab. Grinders provide contractors with a smoother finish than scarifiers or scabblers.		Concrete	(c)
Roto-peening	Portable tool designed to remove and descale protective coatings from steel, concrete, brick, and wood.		Concrete	(e)
References:				
a) TRC Environmental, 2010	c) Sundahl, 1999	f) W&C, 2010a-f	i) Bent, 2000	l) Kuusisto, 2001
b) TEI, 2009	d) EH&E, 2007a-b	g) EH&E, 2010f	j) EPA, 2010g	m) Hamel, 2009
	e) W&C, 2009	h) Bent, 1994	k) Mitchell, 2001	

painted surface (TRC Environmental, 2010). Information on other approaches to physical barriers is provided in Section 3.3.


Mechanical methods of bulk removal include hammer drill or saw cutting, scarification, sand blasting, bead blasting, and water blasting, with the specific method selected dependent on the contaminated material (TEI, 2009). Removal processes that involve large power tools, such as blasting, can be problematic, resulting in notable noise, vibration, odor, and inconvenience. To address these limitations, VanSchalkwyk (2009) advocated relying upon material removal with hand tools, including caulking removal, aided by chemical washing of only horizontal surfaces, and encapsulation of all adjacent building surfaces. For caulk, direct bulk removal requires the removal of caulk within joints and seams and, if necessary, in the adjacent building materials. The cost estimate of caulk removal exceeds \$100/linear foot of caulk (VanSchalkwyk, 2009).

Selection of the most appropriate tools for caulk removal is based on caulk properties, location, and accessibility. EPA categorizes caulk into two types: (i) hard and brittle which is typical of aged and weather exposed caulks and frequently seen in exterior areas, or (ii) elastic and soft, which is found primarily in areas protected from sunlight and weather, and located indoors (EPA, 2010c-f). Material and conditions of the adjoining structures are key elements to consider in choosing an appropriate tool for removal of caulk. Anticipated dust and heat generation also plays an important role in selecting the appropriate tool and method. A summary of tools and methods for removing caulk prepared by EPA is provided in Table 3.2.

Mitigation of PCBs in secondary source materials such as brick or concrete can be more challenging and substantially more expensive than removal of caulk and other primary source materials.

This situation is illustrated by a building in which concrete that was adjacent to beads of PCB-containing caulk was found to contain unauthorized PCB levels. Concrete in the immediate vicinity of the caulk was identified as PCB Remediation Waste and designated for removal and disposal. At this building, a ½-inch by ½-inch linear section of concrete was removed from both sides of every seam between concrete panels that formed the façade of the 17-story structure. The concrete sections were removed with hand-held circular grinding tools operated by trained laborers (see Figure 3.2). Approximately 18 miles of ¼ square inch concrete sections were removed from the face of the building. A hand-held HEPA vacuum was used to capture dust generated by the cutting tools. Personal protective equipment including

FIGURE 3.2 Removal of Concrete Adjacent to Former Seam of PCB Caulking Laid Between Pre-formed Concrete Panels

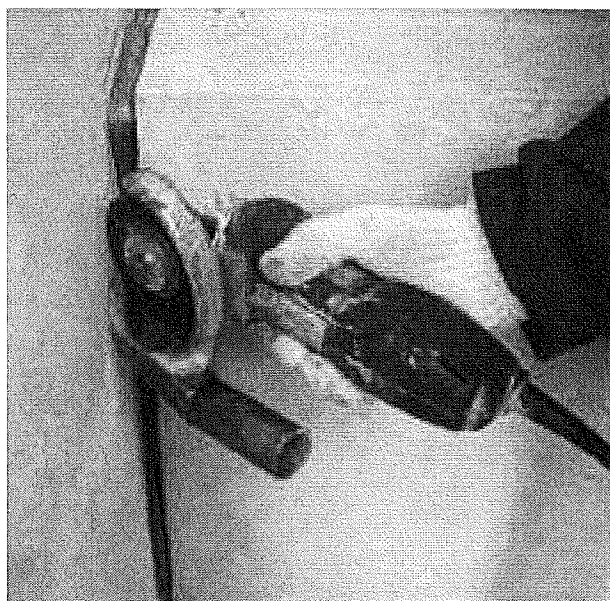

(Source: Fragala, 2010)

TABLE 3.2 Summary of Tools and Methods for Caulk Removal

Tools/Method	Suitability	Advantages	Disadvantages	Protective Measures to Consider
MECHANICAL TOOLS				
Utility knife	<ul style="list-style-type: none"> • Universally applicable tool, especially for cutting out elastic and soft caulk together with an electrical joint cutter • Suitable for all smooth joint faces • Less suitable for working on projects with caulk of lengths exceeding 100 m • Less suitable for very hard caulk • Choice of different blades to suit the joint width and depth 	<ul style="list-style-type: none"> • Short, sturdy blade that is easily exchangeable • Handy, low weight • No dust development in case of elastic caulk • Little dust when removing slightly brittle caulk and cleaning joint faces • Gentle treatment of joint faces 	<ul style="list-style-type: none"> • Requires great exertion in case of hard caulk • Relative low output (linear meters of caulk/hour) • Relatively high labor costs 	<ul style="list-style-type: none"> • General personal protective measures • Construction of Containment Area enclosure (if dust is generated) • Work area decontamination
Ripping chisel	<ul style="list-style-type: none"> • Suitable for breaking out or chiseling hard caulk, especially when working with joint in concave angled planes • Less suitable for joints with a width of less than 5 mm • Less suitable for working on projects with caulk of lengths exceeding 100 m 	<ul style="list-style-type: none"> • Removal of hard and brittle caulk: The cutting edge can be moved along the joint face with greater pressure than a utility knife • Low dust development in case of rough joint faces 	<ul style="list-style-type: none"> • Quickly dulls when working with rough joint faces made of concrete or other hard materials • Possible damage to adjoining structural parts 	<ul style="list-style-type: none"> • General personal protective measures • Construction of Containment Area enclosure • Dust aspiration at the source when cleaning joint faces/ removing loose or crumbling caulk as described in Abatement Step 2
Putty knife/scrapper	<ul style="list-style-type: none"> • Suitable for reworking joint faces with shaving or scraping • Suitable for removing loose or crumbling caulk 	<ul style="list-style-type: none"> • Suitable for rough joint faces 	<ul style="list-style-type: none"> • Poor cutting action • Small particle debris at the joint faces • Longer joints and hard caulk 	
Bush hammer	<ul style="list-style-type: none"> • Suitable for hammering away hard or well-attached caulk residue on hard, robust areas 	<ul style="list-style-type: none"> • No heavy dust development 	<ul style="list-style-type: none"> • Limited to hard and solid surfaces 	
Hammer and chisel	<ul style="list-style-type: none"> • Suitable for very hard, brittle, or wide joints > 2 cm 	<ul style="list-style-type: none"> • For very hard caulk 	<ul style="list-style-type: none"> • Possible damage to structural parts 	

TABLE 3.2 *Continued*

Tools/Method	Suitability	Advantages	Disadvantages	Protective Measures to Consider
ELECTROMECHANICAL TOOLS				
Electrical joint cutter with oscillating blade	<ul style="list-style-type: none"> • Universally applicable tool for cutting out hard and soft caulk, especially in combination with a utility knife; suitable for all material types of adjoining structures. • Less suitable for removing caulk that is difficult to access • Not suitable for very hard caulk 	<ul style="list-style-type: none"> • Short, sturdy blade that is easily exchangeable • Handy, acceptable weight • Low dust volume • Typically low risk of damage to joint faces with careful work 	<ul style="list-style-type: none"> • Moderate exertion required • No integrated dust aspiration 	<ul style="list-style-type: none"> • General personal protective measures • Construction of Containment Area enclosure • Maintain negative air pressure with induced draft fan equipped with High Efficiency Particulate Air (HEPA) filters
Electrical scraper with exchangeable blades	<ul style="list-style-type: none"> • Universally applicable tool for cutting out hard and soft caulk, especially in combination with a utility knife • Suitable for difficult-to-access joint areas in corners and along edges • Also suitable for reworking joint faces • Not suitable for very hard caulk 	<ul style="list-style-type: none"> • Lightweight device, handy • Low exertion • Low dust volume 	<ul style="list-style-type: none"> • No integrated dust aspiration 	<ul style="list-style-type: none"> • Dust aspiration at the source when removing loose or crumbling caulk/cleaning joint faces as described in Abatement Step 2
Needle hammer	<ul style="list-style-type: none"> • On level areas: for broad, shallow dummy joints and connections joints 	<ul style="list-style-type: none"> • Removal of firmly attached, hard caulk 	<ul style="list-style-type: none"> • Higher dust volume; possible damage to adjoining structures 	
Rotary Cutting tools	<ul style="list-style-type: none"> • Only suitable for cutting out the caulk • Not suitable for reworking joint faces • Suitable for difficult-to-access joint areas long edges; not suitable for accessing corners 	<ul style="list-style-type: none"> • Lightweight device, handy • Low exertion • Typically low risk of damage to joint faces with careful work 	<ul style="list-style-type: none"> • Higher dust volume • No integrated dust aspiration 	
Jigsaw with exchangeable saw blades	<ul style="list-style-type: none"> • Tool with integrated dust aspiration. Use is limited to deep joints with free space in accordance with blade length • Only suitable for cutting out the caulk • Not suitable for reworking joint faces • Not suitable for difficult-to-access joint areas in corners and along edges 	<ul style="list-style-type: none"> • Good cutting rate for semi-soft and hard caulk • Integrated dust aspiration 	<ul style="list-style-type: none"> • Only suitable for joints in vertical planes with open joint backup 	<ul style="list-style-type: none"> • General personal protective measures • Construction of Containment Area enclosure • Maintain negative air pressure with induced draft fan equipped with HEPA filters • Connection of the integrated dust aspiration device to an industrial vacuum with HEPA filters.
Diamond sanding device	<ul style="list-style-type: none"> • Electrical joint cutter with oscillating, diamond-coated cleaning and blade and integrated dust aspiration • Only suitable for cleaning joint faces 	<ul style="list-style-type: none"> • Low dust volume compared to angle grinder • Integrated dust aspiration 	<ul style="list-style-type: none"> • Heat development and gaseous emission production not clarified 	

TABLE 3.2 <i>Continued</i>				
Tools/Method	Suitability	Advantages	Disadvantages	Protective Measures to Consider
CHEMICAL-PHYSICAL METHODS				
Dry ice (CO ₂) blasting	<ul style="list-style-type: none"> • Suitable for gentle reworking of joint faces • Suitable for large joint lengths 	<ul style="list-style-type: none"> • Gentle on the surrounding materials • Good cleaning performance (Note: In some cases, the method cannot completely remove caulk) • Good performance for large joint lengths 	<ul style="list-style-type: none"> • Expensive (especially in combination with high demands for protective measures) • Complex requirements for protective measures 	<ul style="list-style-type: none"> • Enclosure of the work area with airtight seal, negative pressure and controlled air exchange, dust aspiration at the source • Full respirator with fresh air supply and protective suit • Noise and ear protection (noise levels range from 85 to 120 dBA, depending on the device)
Source: EPA, 2010g				

full body clothing and N95 respirators was also used to limit PCB exposure to workers (EH&E, 2007a–b). The cost of the abatement project was approximately \$1.4 million, which equated to \$9 per square foot of the building and \$30 per linear foot of PCB-containing caulk. Other project-related costs, both hard and soft costs, included characterization of PCB-containing materials, disruption of building operations, and disposal of the PCB Bulk and Remediation Waste.

Documents identified in the literature search offered little information on the costs of physical removal methods for bulk materials. However, the costs of removing exterior PCB caulk and contaminated porous materials, primarily concrete, using hand and mechanical tools was reported for four buildings (Fragala, 2010). As shown in Table 3.3, the remediation cost generally increased as the size of the building increased. The cost normalized to building size ranged between \$9 to \$18 per square foot of indoor building space. The variation in costs reflects many factors including the amount and accessibility of PCB-contaminated building materials.

The impact of direct bulk removal on PCB concentrations and potential exposures for occupants and abatement workers was discussed in two peer-reviewed papers identified by the literature search. Sundahl (1999) examined PCB concentrations in work site air before and during remediation of PCB-containing caulk between cement blocks. The abatement process consisted of several steps: (1) cutting the elastic sealant with an oscillating knife, (2) grinding the concrete with a machine, (3) sawing the concrete with a mechanical saw, and (4) cutting the concrete with a mechanical chisel. Each process was performed together with a high capacity vacuum cleaner connected to each of the tools. The authors reported that PCBs accounted for up to 8% of the sealant by weight. PCB concentrations up to 450 ppm were found in the surrounding concrete. Without proper controls, PCB concentrations in indoor air were elevated during remediation, with levels generally above the occupational exposure limit of 10 µg/m³ and sometimes over ten times higher (120 µg/m³). However, PCB levels in air were below the occupational exposure limit when proper controls for dust and gases were in place.

TABLE 3.3 Remediation Costs Reported by EH&E

Building Type	Work Schedule	Building Size (Square Feet)	Remediation Cost (\$)	Cost per square foot
University Academic	Vacated due to occupant fears	80,000	\$1.4 Million	\$18
Commercial Office	Occupied	260,000	\$3.4 Million	\$13
University Office	Unoccupied	155,000	\$1.4 Million	\$9
University Academic	Occupied	197,000	\$2.4 Million	\$12

Source: Fragala, 2010

Similarly, Kuusisto (2007) analyzed PCB concentrations on building surfaces after PCB-containing paint was sandblasted with silica and estimated corresponding health risks from these concentrations. A total of sixteen wipe samples were collected after sandblasting was performed in two Finnish industrial buildings. Airborne PCB concentrations were also measured for two hour periods using active samplers. The total surface PCB concentrations ranged between 100 and 1,100 $\mu\text{g}/\text{m}^2$. Estimated cancer risks were higher for children (1.2×10^{-4}) as compared to adults and occupational workers (1.3×10^{-5} and 1.5×10^{-5} , respectively). The hazard quotients, a characterization of non-cancer risk, ranged between 3.3 and 35 depending on the exposure scenario. Acceptable surface concentrations (e.g., protective for 95% of the exposed population) were calculated to equal 7 $\mu\text{g}/\text{m}^2$ for residential use, 65 $\mu\text{g}/\text{m}^2$ for adult residential use, and 140 $\mu\text{g}/\text{m}^2$ for occupational use. Pilot cleanup experiments showed that PCB-contaminated surface dust should be removed with industrial vacuum cleaners and washed with terpene containing liquid, as vacuuming alone did not sufficiently clean surfaces to acceptable risk levels.

Papers and reports identified by the literature search indicate clearly that physical removal methods are rarely used in isolation and their efficacy is rarely assessed in the absence of effects that are attributable at least in part to complementary mitigation methods. This observation is illustrated by the synopsis of a mitigation effort described by Bent et al. (1994, 2000) that is presented in Box 3.1.

The majority of peer-reviewed scientific papers identified by the literature search focused on characterizing PCB exposures for abatement workers. Several of these studies were based on occupational cohorts in Finland. Priha et al. (2005), for example, conducted a study to assess PCB exposures and health risks among Finnish workers at nine remediation sites. As part of their job, workers operated grinding wheels with local exhaust units for one to four hours while wearing respirators. Personal PCB samples were collected from the breathing zone of 14 workers, while PCB concentrations in 27 elastic sealant samples from nine buildings were also measured. Exposures were estimated using standard algorithms to calculate lifetime average daily dose and carcinogenic risk. The authors found that the estimated PCB exposures of workers were higher than those of the general population, with exposures 10-fold higher than the reference dose and average dietary intake. The calculated point estimate of excess cancer risk was 4.6×10^{-4} cancer cases per lifetime. Since exposure and risk calculations did not account for the fact that workers wore respirators, however, it is likely that risk calculations overestimated exposure and risk.

Box 3.1 Mitigation Efforts Described by Bent et al. (1994, 2000)

In a paper by Bent et al. (2000), a mechanical approach to mitigation of PCB-containing paint was carried out in the remediation of a German school building with PCB concentrations in indoor air of classrooms ranging from 6,000 – 7,000 ng/m³. PCBs were present in the indoor and outdoor faces of concrete, paints, heating element paints, ceiling tiles, and floor surfaces. A total of 245 material samples were collected from remediated and control rooms, with samples from similar sources and room types combined. One hundred material samples were analyzed for PCB contamination. Tests of 30 samples showed that 90% of the casing joints had PCB concentrations of at least 50,600 milligrams per kilograms (mg/kg), with an average value of 85,522 ($\pm 13,863$) mg/kg. The average value for other materials was lower. For example, wall paints had an average value of 216.3 (± 82.0) mg/kg. Factors such as temperature were found to affect PCB levels in air.

Primary surfaces, including the casing joints, heating element paints, and ceiling tiles, were removed manually with cutting tools. Secondary contaminated surfaces were decontaminated using a high-pressure water method, which delivered water at a pressure of up to 2×10^8 pascal to abrade PCB-contaminated surfaces. Resulting PCB-containing sludge was disposed directly in a hazardous waste landfill. Following removal of primary and secondary sources, remediated areas were ventilated (air exchange rates >5 per hour) and basic cleaning was performed. Together, these methods led to the successful reduction of PCB concentrations in ambient air to below 600 ng/m³. Of note, a thermal diffusion method was also tested as a method to remove PCBs from secondary contaminated surfaces. However, this method was found to be ineffective.

In the case study by Bent et al. (1994), one room in a school was remediated as a pilot test. This process focused on removal of the primary PCB sources, a joint-filling material. The joint-filling material was removed using a freezing process, where the joint-filling material was frozen with liquid nitrogen and then removed together with portions of the masonry. Other remediation measures were also performed, including cleaning, stripping of wall paint, and floor cover removal. The average air PCB concentrations in this building was 5,500 ng/m³. PCB concentrations ranged from $77,700.0 \pm 16,339.8$ mg/kg ($n = 5$) for the joint-filling material, 290 mg/kg for the upper PVC floor covering, and $3,088.0 \pm 6.7$ mg/kg ($n = 3$) for the floor adhesive. Wipe samples from the walls showed surface contaminations of $7,348.0 \pm 1,488.7$ $\mu\text{g}/\text{m}^2$ ($n = 5$) related to contaminated joint-filling material. By stripping off the wall paint in the rooms for a pilot experiment, a reduction in the surface contamination from $3,450.0 \pm 410.0$ $\mu\text{g}/\text{m}^2$ ($n = 2$) to 489.0 ± 19.0 $\mu\text{g}/\text{m}^2$ ($n = 2$) was found. Together, the remediation methods lowered indoor air PCB concentrations by 73.8%, with approximately half attributable to the wall paint stripping which decreased levels by 43.6%.

Kontsas et al. (2004) also examined Finnish worker exposures to PCBs during remediation of prefabricated homes. In this study, 24 PCB congeners, including the ten most abundant PCBs in elastic polysulfide sealants, were measured in the serum of 22 exposed and 21 non-exposed men. Corresponding personal air samples were also collected. Total serum PCB concentrations (as assessed using the 24 measured congeners) in the exposed workers ranged between 0.6 and 17.8 micrograms per liter ($\mu\text{g}/\text{L}$). Serum PCB concentrations for ten people exceeded the Finnish upper reference limit for occupationally non-exposed people (3 $\mu\text{g}/\text{L}$). Non-exposed workers had lower serum PCB levels, ranging between 0.3 and 30 $\mu\text{g}/\text{L}$.

3.1.2 Physical Removal of Light Ballasts

Review of the available literature associated with PCB-containing light ballasts and light fixtures suggests that PCB-containing light ballasts should always be considered when conducting a PCB source identification and remediation project. According to the EPA Region 10 (1993), when a PCB-containing light ballast fails, measures should be taken to limit or avoid personal exposure. Detailed cleanup and decontamination procedures for a leak, including management and disposal of wastes from PCB-containing ballasts, are outlined on EPA's PCB laws and regulations web page (EPA, 2010a-b).

Schools in the United States built before 1979 can potentially have fluorescent light ballasts that contain PCBs. Failed or leaking fluorescent light ballasts may contribute to levels of PCBs in the air and on surfaces inside school buildings. The typical life expectancy of these ballasts is 10-20 years and EPA has seen evidence of leaking PCBs in light ballasts in schools in Oregon, North Dakota, and Massachusetts. The capacitor in the ballast may contain PCBs and typically has 0.1 kg of PCB fluid. Ballasts manufactured in the United States after 1978 are labeled "No PCBs", and therefore any unlabeled ballast from the United States should be assumed to contain PCBs (UNEP, 1999).

Several research projects show the impact of PCB-containing light fixtures on indoor PCB concentrations (NYC DOE, 2010; MacLeod, 1981; Funakawa et al., 2002). During the New York City school project, investigators noticed elevated indoor PCB concentrations in spaces without PCB caulk, and identified PCB-containing ballast in lighting fixtures. After replacement of lighting fixtures, the indoor air PCB concentration in one of the classrooms decreased from 2950 ng/m³ to 81 ng/m³. Defective PCB-containing light ballasts have been shown to emit PCBs and to be an important source of indoor PCB contamination (MacLeod, 1981). This research demonstrated a 50-fold increase in airborne PCB concentrations after the burnout of PCB-containing ballast and elevated PCB levels for 3-4 months after the burnout event. A field study in Japan found total PCBs in indoor air of 26 - 110 ng/m³ for an office with PCB-containing light ballasts (Funakawa et al., 2002). These authors also reported that mixture of PCBs in indoor air of the office was similar to the composition of PCBs emitted from the light ballasts during chamber tests.

There are significant costs associated with PCB-containing light ballast replacement. However, there are also significant costs and risks that may be incurred by not replacing these fixtures. A study prepared for the Department of Energy (SAIC, 1992) evaluated four solutions for addressing PCB-containing light ballasts and concluded that a program that is preventive in nature provides the most economical solution. Removal of PCB-containing light fixtures benefits the indoor environmental quality of a school by reducing potential impact of PCBs. In addition, replacement of old PCB containing light fixtures offers a significant energy savings benefit. According to EPA (2007), proactive replacement of PCB-containing light fixtures can reduce the potential high cost of cleanup and relocation of students that may be associated with a ballast leak or failure. It is important to note that Federal law requires removal and disposal of leaking PCB-containing ballasts and disposal of any PCB-contaminated materials at an EPA-approved facility.

3.2 SOURCE MODIFICATION

Source modification based on chemical degradation or extraction of PCBs in building materials was discussed in several peer-reviewed journal articles and conferences identified by the literature search. Key characteristics of these methods are presented in Table 3.4 and additional information about these methods is provided in the narrative that follows.

3.2.1 Chemical Degradation

Tanner (2010) discussed the Amstar dechlorination liquid, a product based on a nucleophilic substitution reaction reported to remove chlorine from PCBs without generating toxic byproducts or waste. This method has been shown to decontaminate steel ship bulkheads successfully and, to a lesser extent, soil, railroad ballast materials, and bulk oil as well. For bulkheads with PCB levels greater than 100 ppm, Amstar was shown to reduce PCB contamination by 90 – 99%. Tanner (2010) reports that Amstar is currently being tested on painted surfaces, coated surfaces, caulks, soils and bulk oils. However, no results from the testing were available in time for this report.

Method	Description	Example	Applied Buildings Materials	References
Degradation	An activated metal within a solvent system and a thickening agent to form a paste. The technology extracts PCBs from materials such as paints and soils. The extracted PCBs react with the activated metal and are degraded into by-products.	Activated Metal Treatment System	Painted surfaces, concrete, caulk and other adhesives, soil	(a), (b), (c)
	Nucleophilic substitution reaction that removes the chlorine from the PCBs without heat.	Amstar dechlorination liquid	Concrete, dust, metal surfaces, insulation, paints, gaskets, soil	(d)
Chemical Extraction	Performance-based organic decontamination solvents.	Capsur® (aqueous-based), Hexane (solvent-aqueous solution), kerosene, diesel, terpene hydrocarbons, TechXtract®, Aluminum Brightner	Porous-material (concrete, granite, brick)	(e), (f), (g), (h), (i)
	Double-wash-rinse procedure described in 40 CFR§ 761 Subpart S. 1) detergent wash, 2) potable water rinse, 3) solvent wash, and 4) solvent rinse.	Z-Green®, Big Orange® Industrial Degreaser Solvent, or any solvents in which PCBs are 5% or more soluble	Concrete	(h), (i)
Cleaning	Removal of residual PCBs from non-porous surfaces including PCBs sorbed to settled dust	Mineral spirits, HEPA VAC, commercial cleaning agents (e.g. Simple Green, TSP), kerosene, diesel, terpene hydrocarbons, pine soap-water solution, wet cleaning	Non-porous material (e.g., metal and glass), dust	(c), (e), (g), (j), (k), (l)
References				
a) Quinn, 2010	c) Ruiz, 2010	f) W&C, 2009	i) W&C, 2010a-f	l) Kuusisto, 2001
b) Novaes-Card, 2010	d) Tanner, 2010	g) Mitchell, 2001	j) EH&E, 2010f	
	e) TEI, 2009	h) Scadden, 2001	k) Bent, 1994	

In conference abstracts, Quinn et al. (2010) and Novaes-Card et al. (2010) discussed plans to present results from laboratory testing of the Bimetallic Treatment System (BTS) and the activated metal treatment system (AMTS), both of which use zero-valent magnesium (ZVM) in an acetic acid/ethanol solution to remove and rapidly degrade PCBs in structural coating materials, such as paint. Researchers from National Aeronautics and Space Administration (NASA) and University of Central Florida (UCF) previously demonstrated rapid and complete dechlorination of PCBs in PCB-containing aqueous/solvent systems, showing total degradation of up to 50 nanograms per microliter (ng/ μ L) of PCB-151 in one hour (Novaes-Card et al., 2010). In paint, AMTS was shown to reduce PCB levels in some samples from 2,797 mg/kg to 29 mg/kg in seven days. These methods removed PCBs without destroying the polymeric lattice structure of the paint. The technical report from these researchers (Ruiz et al., 2010) further evaluated the performance of BTS at two Department of Defense (DoD) facilities. The performance criteria were tested for; i) distribution and adherence, ii) adherence of sealants, iii) ease of implementation, iv) reduction of PCB concentration in treated paint to less than 50 mg/kg, v) reduction in PCB concentration in BTS paste to less than 50 mg/kg, and vi) impact to paint adherence. The BTS demonstrated strong performance in adherence and ease of implementation criteria. The PCB concentration of paint and concrete surfaces were reduced to less than 50 mg/kg (starting concentration of approximately 500 mg/kg) in approximately 1 week after application. However, after application of BTS, the adhesive qualities and adherence of the surface layer of paint was negatively impacted. A cost analysis for concrete and metal treatment with BTS concluded that for porous materials, such as concrete coated with PCB-containing paint, treating the concrete and paint with BTS and reusing the building structure is more cost effective than demolishing the building. However, for nonporous structures (i.e., metal tank) coated with PCB-containing paint, disposing the untreated tank to a TSCA landfill and replacing with a new tank is at least \$80,000 cheaper than the alternative methods. These cost analysis results are summarized in Table 3.5.

For porous materials, such as concrete coated with PCB-containing paint, the cost analysis shows that it would be most cost effective to treat the concrete, paint with BTS, and reuse the building, as

TABLE 3.5 Remediation Cost Analysis of Concrete (porous) and Metal(non-porous) Surface Coated with PCB-Containing Paint

Concrete Building Coated with PCB Containing Paint (250 mg/kg)		
Demolition, untreated and disposed of in a TSCA landfill	Demolition, treated prior to demolition with BTS, disposed of in a non-hazardous landfill and recycled	No demolition, structure treated with BTS and reused.
\$200,000	\$180,000	\$150,000
Metal Tank coated with PCB Containing Paint (250 mg/kg)		
Untreated and disposed of in a TSCA landfill	Remove paint using sandblasting, waste sent to TSCA landfill and metal tank recycled	Treated with BTS and painted metal tank recycled
\$25,000	\$105,000	\$140,000

Source: Ruiz, 2010

compared to demolishing the building. However for nonporous structures (metal tank) coated with PCB-containing paint, the cost analysis shows that it would be more cost effective to just dispose of the metal structure and replace it with a new one.

Kume et al. (2008) developed a catalytic degradation method of removing PCBs using palladium on an activated carbon-triethylamine (Pd/C-Et³N) system at ambient hydrogen pressure and temperature. Though this reagent has not been applied to building materials such as caulk and concrete, the reagent was tested in paraffin oil and PCBs from capacitor and completely dechlorinated the PCBs into biphenyls.

Barkley (1990) compared performance and cost analysis between physical removal and chemical degradation of PCBs in concrete. Physical removal was conducted using shot-blasting, which is a technique using steel shot to remove surface layers of contaminated concrete. The chemical dechlorination technique used IT/SEA Marconi reagent, consisting of a polyethylene glycol-based mixture. The warmed (heated) liquid is applied several times using a sprayer, brush or roller, and then the reagent is allowed to remain in place undisturbed for 2-3 weeks. Forty pre- and post-remediation concrete core samples were collected for each remediation method. The pre-remediation concentration ranged from 0.13 – 65 ppm for shot-blasting and 4.6 – 60 ppm for IT/SEA Marconi treatment. The percent reduction of PCB concentration in concrete after the shot-blasting method ranged between 15 – 96% (average 68%) and IT/SEA Marconi treatment ranged between 11 – 97% (average 73%). Cost analysis concluded that the IT/SEA Marconi reagent method (\$0.85/sq ft) is more cost-effective than the shot blasting method (\$2.19), especially since shot-blasting is labor-intensive and generates contaminated waste that requires disposal at a permitted hazardous waste facility. The commercial availability of IT/SEA Marconi reagent is unknown.

3.2.2 Chemical Extraction and Cleaning

Various means of cleaning PCB-contaminated materials were reported to precede source encapsulation or follow bulk removal. Some of the methods were described in case reports while others were identified in conference proceedings and other grey literature.


A commercial solvent designed for PCB extraction known as CAPSUR® was noted in several case reports and presentations (W&C, 2007; W&C, 2008b; W&C, 2010c; W&C, 2010e; TEI, 2009; Mitchell and Scadden, 2001). Woodward & Curran, Inc. (W&C) conducted several pilot studies to test the effectiveness of a commercial product, CAPSUR®, in removing PCBs from vertical and horizontal concrete surfaces (W&C, 2007; W&C, 2008b; W&C, 2010c; W&C, 2010e). CAPSUR® is an aqueous-based solvent with emulsifiers for the cleanup of PCBs. After removal of caulk, CAPSUR® was applied to each joint using a hard bristle brush for approximately 5 minutes. Then the product was left for 30 minutes, followed by rinsing with clean water and vacuuming off the visible chemical from each surface. After a single application of CAPSUR®, the post treatment PCB concentration increased by 1.2 to 4 times. W&C (2010e) continued to test this product by applying multiple coats (up to 10 coats) of CAPSUR® with multiple rinses. However the post-treatment results were variable and did not always reach the regulatory limit of 10 µg/100 cm². Some of the potential issues of CAPSUR®

addressed by these pilot studies were: lower temperature reduces removal efficiency and insufficient rinsing and vacuuming may have contaminated the verification samples. In addition, approximately 660 pounds of waste materials containing PCBs were produced and building occupants complained about the odor of CAPSUR®. A carbon air filter was installed and the exhaust line was moved to the roofline. Figure 3.3 shows the CAPSUR® application on PCB contaminated concrete conducted by W&C (VanSchalkwyk, 2009).

Ljung et al. (2002) evaluated a new approach for extraction of PCBs from concrete based on the concept of a “sacrificing sealant”. If efficacious, such a method could limit reliance on labor-intensive and costly methods for bulk removal of contaminated concrete. In the in situ trials reported by Ljung (2002), 90 small sections of contaminated sealant (caulk) were removed from linear sections of sealant, leaving numerous small holes in each section. Each hole was filled with one of three “sacrificing sealants”, either a modified silicone-polymer (MS-pol), polyurethane-1 (PUI), or polyurethane-2 (PU2) sealant. The sacrificing sealants were analyzed for PCB concentrations after remaining in the holes for one, two or three months. Results from these tests showed increasing PCB concentrations over time for MS-pol and PUI, but not PU2. Results suggested that the “sacrificing sealants” needed at least two months for the PCBs to migrate into the sealants. However, even after two months, the PCB-content in the “sacrificing sealants” was low, as less than 0.1% of the original sealant PCB concentration was found. The authors concluded that this “sacrificing sealant” method was not effective at extracting PCBs from adjacent materials over the time frames studied.

In presentations by Scadden and Mitchell (2001), cleaning and source encapsulation methods used to remediate PCB-contaminated concrete floors were summarized and their efficacy was examined. Cleaning methods for PCB-contaminated concrete floors included a double-wash-rinse procedure (Title 40 Code of Federal Regulations CFR Section 761.30(p)), which is required to prepare PCB-contaminated concrete for encapsulation. The surface washing steps used for this remediation included a detergent wash (1:3 ratio of water and Z-Green, ZEP Chemical Company), a potable water rinse, a terpene hydrocarbon solvent wash (Big Orange Industrial Degreaser Solvent, ZEP Chemical Company), and a solvent rinse. The detergent washing resulted in a cleaner surface and resulted in generally lower PCB concentrations on the concrete surface, while PCB levels remained the same or slightly higher during the solvent wash and rinse steps. The floors were subsequently scrubbed with a 30% muriatic acid solution

FIGURE 3.3 CAPSUR® application on PCB-Contaminated concrete surface

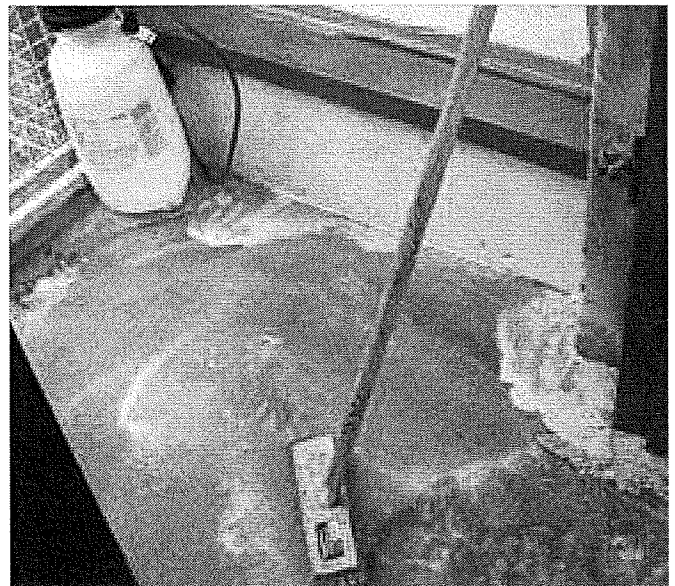

(Source: W&C, 2009)

to roughen the concrete surface and ensure epoxy adherence to the surface. After abrasion, the floor was again washed. Two coats of the encapsulant (Armorseal 700 HS, Sherwin Williams Company), hard epoxy coatings, were then applied to the concrete surface, with the coats in contrasting colors. Cracks, bubbles, soft spots, and small pinholes were found immediately after application, likely due to inadequate mixing of the encapsulant. These problems were repaired by grinding the affected areas and replacing with a new epoxy topcoat, with pinholes filled with a Sherman Williams high-strength polymer product and applying additional epoxy. No information on the effectiveness of the epoxy coatings was presented.

Scadden and Mitchell (2001) reported the costs for the double-wash-rinse and encapsulation activities were \$23.75 per square foot of floor area. Additional costs for these procedures included \$6.85 per square foot for transportation and disposal of wastes, and \$39,000 for engineering oversight and analytical costs.

Bent et al. (1994) published two case studies of PCB remediation in German school buildings. In the first case, a twelve-classroom school built in 1971 was remediated. Specific concerns included the interior rooms that were finished with PCB-containing paint and windows that had PCB-containing sealant in the window flashing area. Remediation was performed while the building was in use. Initially, furniture was removed; walls were cleaned with a high-pressure cleaner; lamp shells were removed; ceilings, furniture, and lamp shells were cleaned by damp cloth; drapes and curtains were washed. The upper wax film of the PVC floor covering was removed with 4 – 5 courses of stripping. The PCB joint-filling material was subsequently covered with self-adhesive aluminum foil. Together, these cleaning and encapsulation measures were effective, reducing indoor air PCB concentrations by 68% on average (initial levels= $3,975.0 \pm 425.3 \text{ ng/m}^3$, $n = 4$; remediated levels= $1,267.3 \pm 67.7 \text{ ng/m}^3$, $n = 7$). Elevated outdoor temperature was shown to increase the indoor air PCB levels, pointing to the need for both test and control rooms to assess remediation effectiveness. Similarly, furniture and other classroom materials were also found to be a secondary source of PCBs, as demonstrated by observed reductions in indoor PCB concentrations when they were removed. In contrast, air handling systems (or “air washers”) that remove dust from the ambient air using a wet process were shown to have no observable impact on indoor air PCB concentrations.

Pizarro et al. (2002) conducted an experimental study examining the efficacy of cleaning and subsequent encapsulation of PCB-containing concrete. Three cleaning methods and three epoxy-coating systems were tested on PCB-contaminated and non-contaminated concrete core samples. Cleaning methods included hand rubbing of a sulfuric acid-based detergent Aluminum Brightener (Hotsy Equipment Company, Mars, PA), high pressure wash with a sodium hydroxide-based Ripper II (Hotsy Equipment Company, Mars, PA), and a multi-step chemical sequestration system TechXtract (Active Environmental Technologies, Mount Holly, NJ). Both the Aluminum Brightener and Ripper II were diluted 1:5 by volume. Three epoxy-coating methods were also analyzed: (1) Plastite system (Wisconsin Protective Coating, Green Bay, WI), (2) Chemicote system (Garland Floor Company, Cleveland, OH), and (3) Corobond system (Sherwin-Williams, Pittsburgh, PA). Each coating method included a primer and two layers of epoxy coatings. The performance of the cleaning methods was

evaluated using wipe tests before and after cleaning, with post cleaning tests conducted every other day for two weeks and every other week for the next eight months. At the end of the eight month period, a two-inch core sample was taken from the PCB-containing cement block. Similarly, the effectiveness of the coating systems were tested on concrete cores, each cleaned with TechXtract prior to coating. Surface wipe samples were collected pre- and repeatedly post-coating at the same weekly intervals. After the eight month sampling period, pull tests were performed using an elcometer to test coating adhesion strength, with a subsequent core sample taken for sectional analysis of PCBs.

Results for the experiments reported by Pizarro et al. (2002) showed that cleaning methods alone were an ineffective long-term solution for containing PCBs in concrete, as cleaning removed a portion of PCBs from only the first inch of concrete. Bleed-back of oil and PCBs occurred within days after cleaning for all cleaning methods, which was attributed to capillary rise of the oil in which the PCBs were dissolved.

Method	Technique	Description	Example	Applicable Building Media	References
Contact Encapsulation	2 stage epoxy	Application of a primer that forms a bond with the PCB-containing material, followed by application of two layers of epoxy coating.	Armorseal 700 HS, Plastite System, Chemicote System, Perma-crete, Sikagard 62, Sikaflex-15 LM, Macropoxy 646	Porous material (concrete, granite, brick)	(a), (b), (c), (d), (e)
	Glazing barrier	Application of conventional surface coatings to limit migration of PCBs and minimize potential for dermal contact.	Silicone, acrylic paint	Porous material (concrete, granite, brick)	(a)
	Paint		Latex paint, low VOC oil-based paint	Porous material (concrete, granite, brick)	(f),
	Sealant		Caulk	Porous material (concrete, granite, brick)	(g), (h), (i)
Physical Barrier	Wall, fence, isolation	Limit migration of PCBs and minimize potential for dermal contact and transport of PCB vapors.	Interior walls, exterior fences, isolation with polyethylene sheeting, self-adhesive aluminum foil, mini-wall or false wall	Soil, external wall, ceiling, caulk	(f), (g), (h), (i)
Ventilation	Introduce ventilation, modify existing HVAC	Increase the outdoor air ventilation within an interior space to reduce concentrations of PCBs in indoor air and associated inhalation exposure.	Adjust temperature set points, modify HVAC operation schedule, open windows, modify exhaust and/or supply flow, increase air flow with axial flow	Indoor air	(g), (h), (i), (j)
Air Cleaning	Filtration	Remove PCB vapors from indoor air by absorption onto organic carbon rich sorption media	Commercial air cleaners with high capacity activated carbon filters or equivalent	Indoor air	(i)
References a) TEI, 2009 b) Mitchell, 2001		c) Scadden, 2001 d) TRC Engineers, 2010b-c e) W&C, 2010a-f	f) TRC Environmental, 2010 g) EH&E, 2010f h) Bent, 1994	i) EH&E, 2010a-e j) EH&E, 2007a-b	

Bleed-back was greatest when low-pH cleaning reagents were used or when hydraulic oil was added to the PCB-contaminated concrete after cleaning. For TechXtract, the efficiency of PCB removal was enhanced when the concrete surface was heated, as heating accelerated the bleedback process and thus lowered surface PCB concentrations. The authors concluded that surface heating (together with a system to capture volatilized contaminants) is a potentially viable remediation approach.

3.3 ENGINEERING CONTROLS

Engineering controls for mitigation of PCB-containing materials were discussed in several reports identified by the literature search. These controls include contact encapsulation, physical barriers, ventilation, and air cleaning. Key characteristics of these methods are provided in Table 3.6 and additional information about these methods is provided the narrative that follows.

3.3.1 Contact Encapsulation

Contact encapsulation refers to application of a barrier directly on top of PCB-containing materials. The objective of contact encapsulation is to block contact with PCBs in those materials and to impede volatilization of PCB vapors. Documents identified by the literature search that focused on source encapsulation included 1 peer-reviewed journal paper and 6 technical reports. These papers examined several encapsulating methods, some of which included cleaning prior to encapsulation.

Important properties to consider when choosing a coating include elongation (i.e., its elasticity or rigidity), dry film thickness, hardness, drying or curing time, and compatibility with existing surfaces (W&C, 2010f). Epoxy-type coatings are widely used for PCB encapsulation. Epoxy coatings generally consist of a three-part epoxy-polyamide coating applied in a primer layer, clad leveler, and surface layer. Encapsulants applied to floors should include two coatings of contrasting color to indicate when resurfacing is required due to wear (Mitchell and Scadden, 2001).

Specific products such as Sikagard 62 have been approved by EPA Region 1 to encapsulate exposed surface of the brick, extending out a minimum of 4 inches from the caulk joint (EH&E, 2007a-b). Once the sealant has dried and a visual inspection has been conducted and the necessary confirmatory sampling has been conducted (approximately 72 hours after application), a caulking material, Sikaflex, was applied to weatherize the building. A few groups conducted power washing of the concrete walls prior to applying the encapsulant to ensure proper contact between the concrete (ATC, 2010; W&C, 2010f). The scrubbing head on the hand-held pressure washer was designed with a vacuum to collect the wash water. Rubber membrane troughs were placed below wash locations to collect wash water not collected by the scrubbing head vacuum and ran down the building. The collected wash water was pumped to holding tanks.

A two-part system comprised of bond breaker tape and silicone caulk has been used to encapsulate PCB-containing caulk as an interim mitigation measure. The bond breaker tape provides a PCB barrier, and the silicone caulk provides a top coat that further limits opportunities for direct contact with skin. Post-remediation wipe sampling of the silicone caulk sealant has shown this system to be effective for at least 5 months (EH&E, 2011a).

Ability, Effectiveness, and Aesthetics of Various Encapsulants

Type	EnviroSeal 20 (Clear)	Sikagard 670W (Clear)	Sikagard 670W (Gray)	Sikagard 550W Elastocolor (Gray)	Sikaflex 2C (Bronze)	Sil-Span (Bronze)
<p>Most potrayed effectively desired</p>	<p>Very liquid upon application (runs like water), drips beneath masked edges on masonry; full-scale use would only be practical if applied to entire panels. Rating: Poor</p>	<p>Relatively easy to apply, does not run on vertical surfaces with thin and even coats; effectively coats surfaces to desired extent. Rating: Good</p>	<p>Very easy to apply (consistency of a typical exterior latex paint), does not run on vertical surfaces with thin and even coats; effectively coats surfaces to desired extent. Rating: Good</p>	<p>Very easy to apply (consistency of a typical exterior latex paint), does not run on vertical surfaces with thin and even coats; effectively coats surfaces to desired extent. Rating: Good</p>	<p>Two-part caulking; installation is typical of exterior caulking. Rating: Good</p>	<p>A preformed silicone profile strip is affixed to the surface of the concrete panel with an adhesive applied on either side of the caulked joint. Rating: Good</p>
<p>Used dual at 5 to 7 joint, and central at 3 to 4 1.5" re- of inside .00 cm² joint.</p>	<p>Somewhat effective in containing residual PCBs > 100 ppm within 0.5" of the joint – one wipe sample reported at 0.9 ug/100 cm². Somewhat effective in containing residual PCBs < 25 ppm at 0.5-3" from the joint – two wipe samples reported at non-detect and one reported at 35 ug/100 cm². Rating: Fair</p>	<p>Effective in containing residual PCBs > 100 ppm within 0.5" of the joint and residual PCBs < 25 ppm at 0.5-3" from the joint – two wipe samples from each interval reported at non-detect (4 sample total). Rating: Good</p>	<p>Effective in containing residual PCBs < 25 ppm at 0.5-3" from the joint – one wipe sample reported at non-detect. Rating: Good</p>	<p>Effective in containing residual PCBs > 100 ppm within 0.5" of the joint – one wipe sample reported at non-detect. Somewhat effective in containing residual PCBs < 25 ppm at 0.5-3" from the joint – one wipe sample reported at 0.6 ug/100 cm². Rating: good</p>	<p>PCBs reported ND at 5 out of 6 sample locations (6th location reported at 0.6 ug/100 cm²) – 17 out of 18 wipe samples reported at non-detect using a hexane-preserved, a saline-preserved, and a dry wipe at each location. Rating: Good</p>	<p>Effective in containing residual PCBs within the joint and the adjacent concrete face covered by the Sil-Span – three wipe samples reported at non-detect using a hexane-preserved, a saline-preserved, and a dry wipe. Rating: Good</p>
<p>ates a e coating rly glossy, rky and ong-term ght (non iver, ld be</p>	<p>Cured product appears invisible – matches the appearance of adjacent uncoated concrete. Rating: Good</p>	<p>Cured product has a glossy / shiny appearance, slightly distinguishable from adjacent uncoated concrete at edge of coated area. Rating: Good</p>	<p>Cured product dries evenly and in a color true to the chart used for color selection; surface has a matte appearance and a natural feel and finish similar to the underlying concrete. Rating: Fair</p>	<p>Cured product dries evenly and in a color a shade lighter than the chart used for color selection; surface has a matte appearance and natural feel and finish similar to the underlying concrete. Rating: Fair</p>	<p>Typical of exterior caulking; can be color matched to the current caulking color or to the adjacent building surfaces. Rating: Good</p>	<p>The strip covers a width of approximately 2 inches over the ¾-inch wide caulking joint; multiple colors available. Rating: Fair</p>

poxy	EnviroSeal 20 (Clear)	Sikagard 670W Clear	Sikagard 670W Gray	Sikagard 550W Elastocolor (Gray)	Sikaflex 2C (Bronza)	Sil-Span (Bronze)
<p>implemen- thetics atings, this st effective ng high PCBs and is (or a simi- product, 5) for use in r caulking</p>	<p>Given the poor implementability and fair effectiveness, this product is not recommended for use in full-scale imple- mentation.</p>	<p>Given its good ratings in each cat- egory, this product is recommended for use on concrete surfaces adjacent to caulk joints; full-scale applica- tion would result in minimal changes to the appearance of the façade.</p>	<p>Although this product is eas- ily implementable and effective, the colored finish may not be a desirable option from an aesthetic stand- point.</p>	<p>Although this product is eas- ily implementable and effective, the colored finish may not be a desirable option from an aes- thetic standpoint.</p>	<p>Easily imple- mentable, effective, and color options are available to achieve desired outcome. Imple- mentation would result in minimal changes to the appearance of the façade.</p>	<p>Although this product is fairly easy to implement and is ef- fective, the two-inch wide colored strip over the joint may not be a desirable option from an aesthetic standpoint.</p>

ratings were given to any product that was easy to apply in comparison to typical exterior paints or caulking materials. Fair ratings were given to any product that was more complicated in comparison to easier products. Poor ratings were given to any product that is not recommended for full-scale

were given for products where surface wipe samples collected after application were reported as non-detect or close to non-detect for PCBs. Poor ratings were given for products where surface wipe samples collected after application were reported at higher levels for PCBs, but achieved at least some level of contaminant

poor ratings. Fair ratings were given to any product that does not markedly change the appearance of the façade. Fair ratings were given to any product where the final appearance was not from the present appearance. No products were given poor ratings.

According to results of a study by Pizarro et al. (2002), coatings were an effective containment solution for PCBs in concrete (as assessed for an eight month testing period), provided that the concrete surface was aggressively cleaned to maximize oil extraction and minimize bleedback and was patched to provide a smooth surface prior to primer application. Aggressive cleaning is difficult to achieve on vertical surfaces for cleaning methods that rely on extended residence time for cleaning agents on the concrete. High-pressure washing over sufficient duration may be effective on vertical surfaces. Coatings were not effective when free oils were present on the concrete surface prior to coating or if the concrete was heated.

In all cases, long-term monitoring plans need to be put in place to ensure the integrity of the seal. W&C (2010f) conducted a pilot study to test seven encapsulant products based on implementability, effectiveness, and aesthetics. With overall evaluations, they concluded the most successful product was Sikagard 62 epoxy in the joint (in direct contact with caulk) and Sikagard 670W clear on adjacent concrete. The summary table was reproduced from that report and is presented in Table 3.7.


3.3.2 Physical Barriers

Physical barriers can be used to separate areas with PCB-containing building materials from other areas of a building. The fundamental objective in most cases is to minimize opportunities for direct contact with materials that contain PCBs or to mitigate emissions of PCB vapors to air. The type and configuration of physical barriers will depend on the disposition of PCB-containing materials and how the building is used.

Fences and interior walls prevent building occupants from coming into direct contact with PCB-containing building materials. A simple plastic mesh snow fence was placed around the perimeter of a building façade to prevent people from approaching or contacting PCB-containing caulk on the exterior face of a school (EH&E, 2010f). As noted in Section 3.1.1, a “false wall” was constructed over walls covered by PCB-containing paint in order to prevent direct contact with the PCBs on the original painted surface (TRC Environmental, 2010).

An example of a false wall or “mini-wall” is depicted in Figure 3.4. At the time this building was constructed, PCB caulk was used to seal the joint between the aluminum framing and composite

FIGURE 3.4 Panel A – Photograph of Pre-installment of Mini-walls/Panel B – Photograph of Post-installment of Mini-walls

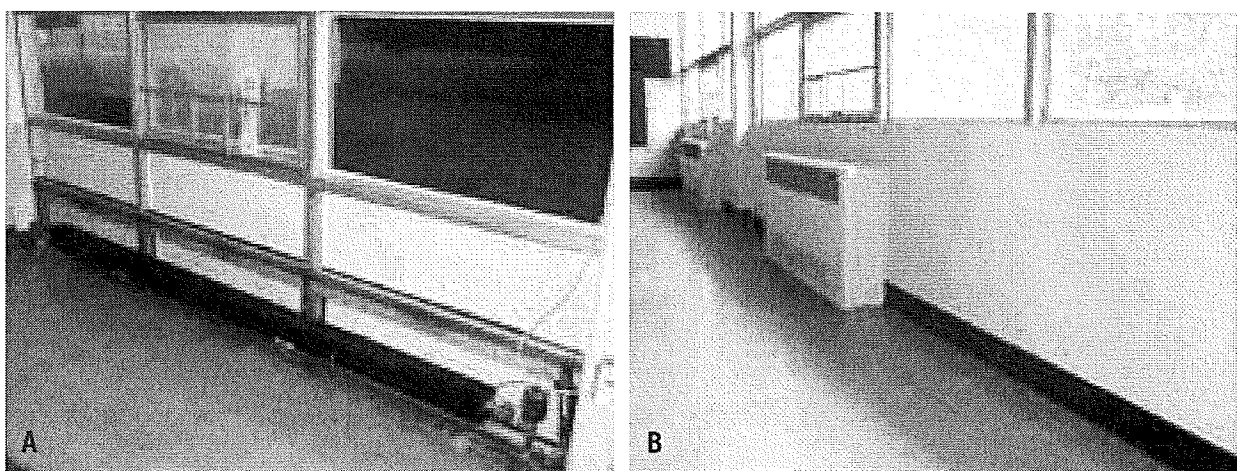

(Source: EH&E, 2010b)

panels shown in Panel A of the figure. Mini-walls were constructed over the framing to prevent opportunities for contact with the caulk and to impede transport of PCB vapors to indoor air (Panel B of the figure). The mini-walls were constructed first by installing foil coated foam board insulation over each section of composite panel and sealing the joint between the aluminum frames and insulated foam board (EHE, 2010b). The foam board and framing was then covered with wall board, sealed, and painted to match classroom walls. New cove base was added to complete the mini-wall construction.

Physical barriers have also been used as an interim measure to minimize contact with soil contaminated by building-related PCBs. In this application, geofabric and fresh mulch have been placed over the contaminated soil, and clean materials such as stone were used to cover the ground surfaces (W&C, 2010d).

In addition to blocking contact, physical barriers can be used to minimize emissions or transport of PCB vapors within a building. Barriers to control vapor transport include sealants or foam applied to joints of building features that form interstitial spaces which include PCB-containing materials. Examples of interstitial spaces that may enclose PCB-containing materials include aluminum framing around the panels of a curtain wall sealed with PCB caulk or wallboard covers over structural beams that are sealed with PCB caulk. Filling void space at select points in an interstitial space or sealing the joints of materials that form the interstitial space will block transport pathways for PCB vapors and lower the potential for subsequent inhalation exposure. In one school, spray foam insulation was injected into aluminum framing adjacent to PCB caulk, and the metal-to-metal joints of an I-beam cover were sealed with Sikaflex 2C to minimize PCB migration pathways (EH&E, 2010c). A limitation of this approach is that the sealants have the potential to absorb PCBs over time and could eventually qualify as PCB Remediation Waste. Monitoring interim measures such as these should be part of an operations and maintenance plan as discussed in Section 3.4.2.

Physical barriers can also be useful for addressing a limitation of encapsulation methods. Depending on the color of the building materials and sealant, encapsulation can be conspicuous on the exterior face of a building. Owners and occupants of some buildings have expressed concerns over the aesthetics of encapsulated areas. For example, a physical barrier was used as a substitute for a layer of encapsulant in one building. After PCB-contaminated caulk was removed from metal window joints, one or two layers of epoxy encapsulation were applied to the adjacent brick. Next, metal panels (also called metal flashing) were constructed as an extension of the existing metal window frame and installed over the brick surfaces to achieve the required two layers of encapsulation. The flashing was painted to match the color scheme of the building (W&C, 2010f).

3.3.3 Ventilation

Ventilation is a means of controlling concentrations of PCBs in indoor air independent of source removal or source modification. Ventilation is not useful for addressing requirements for PCB waste under 40 CFR§761, but it has been shown to be effective for modifying indoor air concentrations and lowering exposures to building-related PCBs.

Bent et al. (2000) included intensive ventilation to reduce indoor air levels. In this approach, PCB-remediated rooms were ventilated at air exchange rates greater than 5 air exchanges per hour for three weeks following the removal of all primary and secondary sources of contamination. Ventilation plus other remediation procedures led to reductions of PCB concentrations in indoor air to below 600 ng/m³ from the initial concentration of 6,000 – 7,000 ng/m³.

Ventilation was also shown to be important in a pilot study conducted in three New York City school buildings (NYC DOE, 2010). In this study pre- and post-remediation air tests were performed with windows closed. Pre-remediation tests showed elevated PCB concentrations in all three schools, with mean levels in the classrooms of two schools ranging between 842 and 1,609 ng/m³. After removing exterior PCB-containing caulk from the schools, post-remediation PCB levels in the same schools were generally lower, as mean PCB concentrations in the classrooms ranged between 450 and 807 ng/m³. However, all areas remained above the targets for PCBs in indoor air of schools suggested by EPA (see Table 1.3). Following removal of PCB-containing light ballast and additional ventilation, mean PCB concentrations in the classrooms decreased substantially (142 – 450 ng/m³), with most areas under the EPA guidance criteria. Similar impacts of source removal and ventilation were found for the schools' common spaces (gyms, halls, stairways, etc.).

A school remediation project in Massachusetts also showed that ventilation can be an effective method for reducing PCB concentrations in indoor air (EH&E, 2010a-f). Indoor air PCB levels were attributable in part to emissions from caulk along the interior seams of composite panels that formed portions of curtain walls along the building envelope. Increased outdoor air flow through unit ventilators and central exhaust systems decreased concentrations by 2 to 4 times for classrooms throughout the school. Similar results were reported for another educational building in Massachusetts (EH&E, 2007b).

Increased ventilation has the potential to distribute PCB-containing dust from duct work or other surfaces in a building. However, comprehensive and regular cleaning of surfaces is effective at limiting accumulation and transport of PCB-laden dust.

3.3.4 Air Cleaning

The literature search identified one report which suggests that operation of air cleaners equipped with activated charcoal can be effective at controlling concentrations of PCBs in indoor air.

Two portable air cleaners, each operating at a flow rate of 400 cubic feet per minute (cfm) were operated in two closed classrooms for 24 hours (EH&E, 2010c). Assuming complete mixing of air in the rooms, the air cleaners provided a recirculation rate of approximately 5.8 air exchange per hour (h⁻¹). The PCB concentrations in indoor air of the rooms measured during the final 8 hours of air cleaner operation were 80 ng/m³ and 111 ng/m³. Indoor air PCB levels measured before the air cleaner experiment were 209 ng/m³ and 364 ng/m³, respectively. Outdoor air ventilation rates to the rooms were approximately 2 h⁻¹ during both the baseline and air cleaner monitoring periods. These results indicate approximately a 3-fold reduction in concentrations of PCBs in indoor air

attributable to operation of the air cleaners. The change in concentration was in direct proportion to the recirculation rate of the air cleaners assuming complete mixing of air within the rooms.

Noise generated by air cleaners and the potential for 'short-circuiting' and incomplete mixing of indoor air is a limitation to their use in sensitive occupied environments such as classrooms. More information on efficacy of air cleaners in relation to noise and mixing is needed to evaluate air cleaning as an effective means of mitigating impacts of PCB-containing building materials.

3.4 ADMINISTRATIVE CONTROLS

Property owners and managers have an important role in managing and mitigating impacts of PCB-containing materials in buildings. Property owners and managers make decisions about priorities for remediation; identify, fund, and implement mitigation plans and programs; and establish and implement operations and maintenance plans. The administrative controls available to property owners and managers to help fulfill their role are discussed in this section.

3.4.1 Space Assignment

Considerations for establishing priorities for mitigation efforts have been outlined by EPA (EPA, 2010c) and include the following;

1. PCB concentration and conditions – building materials with the highest PCB concentration, materials located in locations with direct sunlight, and caulk that is not intact (e.g. peeling, brittle, cracking) have a high potential for release of PCBs,
2. Accessibility – building materials contaminated with PCBs that are easily accessible to building occupants have the potential for direct contact (dermal or ingestion) or indirectly through the air handling system,
3. Occupancy – areas with higher occupancy should receive a higher priority. Consideration should be given to relocating occupants possibly affected by mitigation efforts.

The presence of potentially vulnerable populations should also be considered when establishing the schedule of the PCB mitigation project. For instance and as shown in Table 1.2, EPA suggests that targets for PCBs in indoor air of schools should be age dependent and generally inversely related to age (EPA, 2009c; EH&E, 2011b). The literature contains at least one example of a case in which an administrative approach to risk management explicitly considered the information on differential background exposure among age groups. In that case, kindergarten students were re-assigned from rooms in the original and PCB-containing portion of a school to a newer and non- PCB-containing section of the building (LPS, 2010).

3.4.2 Work Plans

As noted earlier, work plans and operations and maintenance (O&M) plans are important parts of a management system for remediation of PCB-containing building materials. Work and O&M plans offer a multitude of opportunities for administrative controls intended to mitigate impacts of building-related PCBs on occupants and operations of a building.

The 40 CFR§761 regulations for PCBs require that a work plan be prepared prior to commencing any PCB remediation actions at a building. The self-implementing procedures for removal or cleanup of PCB-contaminated building materials require notification and submission of a work plan at least 30 days prior to the cleanup of site under 40 CFR§761.61. The plan must include a description of the abatement and mitigation activities, proposed cleanup levels, removal and abatement procedures, verification sampling procedures, waste storage and handling procedures, and disposal options.

Five EPA-approved PCB remediation plans were identified (ATC, 2010; W&C, 2010a-f; W&C, 2008a-c; W&C, 2007; EH&E, 2007b). Overall the remediation plans contain similar components that are tailored to each building and project setting. The following sections summarize the common remediation plan elements.

Case Narrative

All of the EPA-approved remediation plans identified by the literature search contain a case narrative or background information section. The case narrative includes a description of the building, the location of PCB-containing building materials, and an overview of abatement goals of the remediation project. The narrative also typically contains a description of how the PCB-containing materials were initially identified and plans for follow-up assessments designed to characterize the extent of PCB-containing materials in each building. Photographs, building plans, and site maps are included in the narrative to provide a complete description of the project and its surroundings.

Regulations, Permits, and Qualifications

Federal, state, and local regulations vary slightly from project to project and require close coordination with EPA, state and local agencies. The identification of the applicable regulations and corresponding approval required to perform each building-related PCB remediation project is critical to a successful project. Elements of 40 CFR§761 that are critical to most work plans are:

§761.20: PCB Concentration Assumptions for Use

§761.61(a): Self-implementing on-site cleanup and disposal of PCB remediation waste

§761.61(c): Risk-based disposal approval

§761.62: Disposal of PCB Bulk Product Waste

§761.79(c) Self-implementing decontamination procedures

§761.79(h) Alternative decontamination or sampling approval

Project Scope

The project scope section of a work plan provides an overview of the project application, operation, and goals to evaluate effectiveness. The project scope will also include the identification of materials to be abated and a summary of mitigation methods. In addition, the specific PCB-containing materials and remediation waste streams associated with each material will be described in this section.

Project scope may be broken down into work phases based on an overall renovation schedule or building layout. A description of what will be required in each phase and the associated PCB remediation waste generated by the abatement phase will also be described in this section of

the remediation plan. The description of the abatement work normally consists of the following general elements: site isolation and protection, source containment and removal, material disposal, decontamination and/or removal of PCB residues, acceptance testing and verification and site restoration.

Assumptions and expectations of the abatement contractor that are needed to carry out the scope of work are usually presented in the project scope section of the plan as well. Finally, criteria for acceptance of the remediation work is presented and predicated on obtaining successful testing and inspection results along with completing the site restoration activities.

Execution Plan

The execution plan provides a description of work flow ranging from site preparations to work sequence. Key components of site preparation include ground cover and site isolation. Ground cover is necessary in order to prevent debris from escaping the work zone and to protect existing facilities and the environment. Remediation plans typically detail that the abatement contractor shall use sufficient ground cover along areas where work will take place. Conventional water-impervious membrane coverings secured into the ground in each respective work area are standard. The covering is specified to extend sufficiently from the outside edge of the building or work area to capture any loose remediation debris.

Some projects indicate that on top of the secured membrane a single layer of 6-mil polyethylene sheeting be temporarily secured. This sheeting is designed to collect dust and debris from removal and disposal without impacting the secured membrane in contact with the ground. Remediation plans state that it is important for the abatement contractor to remove and control abatement debris by HEPA vacuuming continuously throughout the work shift and again at the end of each work shift.

Site isolation is required during all phases of PCB abatement work. The remediation plan addresses the security and access concerns as part of each project. Under certain conditions wind barriers in conjunction with local exhaust controls (e.g., HEPA vacuums) are required to minimize airborne dust generated during the project.

The general work sequence for the various remediation tasks is presented in each remediation plan. The general work flow is described in the following steps: site protection, source removal, surface cleaning, material decontamination, waste disposal, testing and verification, site restoration, project acceptance and completion.

Remediation Procedures

PCB remediation plans provide a detailed description of procedures for source removal, source modification and, if planned, engineering and administrative controls. Descriptions of remediation methods identified by the literature search are provided in Section 2 and earlier portions of Section 3 in this report.

Storage and Disposal

Plans for storage and disposal of PCB waste are necessary components of PCB remediation plans. PCB Bulk Product Waste (e.g., caulking), once removed, is specified to be stored for disposal in accordance with 40 CFR§761.40 and §761.65. The work plans identified by the literature search indicate that storage typically consists of placement into a secure and lined container or into an appropriate temporary container (e.g., 6-mil plastic disposal bag) followed by transport into a PCB container at the end of a work shift. Once in the container, these materials must be covered and protected from the weather.

All containers and temporary containers must be clearly marked as PCB-containing waste materials as required under §761.45. Lined and covered barrels containing PCB materials must be marked with designations indicating that the PCB materials are contained in the barrel, as stated in 40 CFR §761.65(c)(1). In addition, secondary containment such as a tarp can be used to prevent spillage onto the floor of the storage area. When not in use, containers should remain covered by both lids and tarps. All areas containing PCB waste must be secured.

Rags and/or cleaning materials, polyethylene sheeting, and PPE used to clean PCB-contaminated materials shall also be disposed as PCB remediation waste or disposed of in accordance with 40 CFR§761.61(A)(5)(v).

When a container is full or the remediation work is complete the PCB remediation waste is placed under manifest and transported to a TSCA waste disposal facility. Management of manifests, shipping records, and certificates of disposal are part of the storage and disposal recordkeeping process.

Abatement Completion Acceptance Criteria

Identification of performance criteria and evaluation procedures for the mitigation actions are always included in PCB remediation work plans so that final approval of the remedial work can be given when the acceptance criteria conditions have been met. Examples of completion acceptance criteria include:

- Visual inspections to confirm that all surfaces are free of dust or debris including work areas and that no visible PCB material identified for removal remains in place.
- Surface and bulk sampling to confirm the effectiveness of the remediation activities.
- Successful restoration of the work site to its original or an acceptable condition.
- Completed and accurate waste manifest to document that every PCB waste container removed from the site has been disposed of properly.

Specific completion acceptance criteria are available from selected remediation work plans and include the following examples:

- Porous surfaces in low occupancy area: bulk sample acceptance criterion will be less than or equal to 25 ppm for total PCBs.
- Porous surfaces in high occupancy area: the bulk sample acceptance criterion will be less than or equal to one ppm for total PCBs.

- Nonporous surfaces in high occupancy area: the wipe sample acceptance criterion will be less than or equal to 10 µg/100 cm² for total PCBs.
- Nonporous surfaces in low occupancy area: the wipe sample acceptance criterion will be less than or equal to 100 µg/100 cm² for total PCBs.
- Encapsulated area: the wipe sample acceptance criterion will be less than or equal to 1 µg/100 cm² for total PCBs.

Health and Safety

Health and safety plans developed as part of PCB remediation projects are designed to ensure the health and safety of abatement contractors, visitors to the site, and occupants of the building.

The abatement contractor typically submits a written health and safety plan that details engineering controls, practices and procedures, protective equipment, and training that will be used to control and minimize potential exposures and work related hazards. In addition, the plan will typically include provisions for all relevant health and safety issues. Health and Safety plans include copies of training materials and training records for those who will be working on-site at any time during the abatement project.

All applicable federal and state OSHA standards and regulations to ensure worker safety must be in effect during the PCB abatement process. The following programs should be addressed in the contractor's health and safety plan: Respiratory Protection, Fall Protection, Personal Protective Equipment, Lockout/Tagout, Confined Spaces, Machine Safety, Ladder/Scaffolding Safety, Electrical Safety, Housekeeping (slips, trips, falls), Injury Reporting, First Aid, and Fire Safety. This is not a comprehensive list of the required programs, and the contractor is responsible for determining which programs apply and how best to implement the required programs.

All PCB abatement work plans emphasize public safety around work areas and that the abatement contractor needs to ensure public safety during all phases of the abatement work. Work plans incorporate containment measures designed to protect workers, occupants, and the environment from the release of PCB-containing materials. Containment may include, but not limited to, draping work areas, the use of HEPA filters to collect fugitive emissions during cutting operations, isolation of work areas from occupied areas, blocking off HVAC intakes, and using protective wind screens and fences.

Access to PCB remediation work areas needs to be limited to ensure that only workers aware of the abatement project will be within the work zone. Proper hygiene and decontamination procedures must be followed to limit the potential for transferring PCB remediation waste outside the work area.

During the abatement work, work plans specify visual or quantitative assessment criteria to verify the effectiveness of the containment controls of the abatement contractor. If observations indicate that additional containment or engineering controls are required, the abatement contractor will be responsible for making the necessary adjustments to the engineering controls.

Operations and Maintenance Plan

Continued management of building materials that contain residual amounts of PCBs is sometimes required following the completion of a remediation program. An Operations and Maintenance (O&M) Plan for PCBs is an effective administrative tool for managing any such materials. The details of an O&M Plan are specific to the conditions of a site however the O&M plans reviewed as part of the literature search have similar objectives and requirements.

The objectives of a typical O&M Plan for PCBs are to:

- Anticipate, recognize, control, and mitigate potential PCB hazards at the site.
- Ensure the continued health and safety of building occupants and the community.
- Maintain compliance with federal and local regulations pertaining to PCBs.

Activities undertaken to achieve those objectives generally include:

- Implement proactive maintenance activity reviews to identify work with the potential to disturb PCB-containing materials.
- Maintain air and surface concentrations of PCBs below established targets.
- Specify schedules, plans and follow-up assessments.
- Evaluate all projects or work activities that may potentially disturb PCBs to determine if precautions are required (e.g., inspection, testing, abatement).
- PCB remediation and hazardous materials training will be provided to selected building management employees.
- Allow only qualified and trained personnel to perform activities that will potentially disturb PCB-containing materials.
- Ensure that elements of the O&M Plan are observed.
- Provide PCB awareness training to building occupants.
- Institute a system for all contractors and vendors to report any condition or activity that could result in the disturbance of PCBs to building management.
- Institute a system for reporting all accidental disturbances and/or releases of PCBs to building management for evaluation and follow up.

► 4.0 CONCLUSIONS AND RECOMMENDATIONS

EH&E undertook a comprehensive review of published papers, reports, and other information to catalog and evaluate remediation methods for PCBs in building materials. This report contains a description of existing methods for abatement of PCB-containing building materials and mitigation of impacts from PCBs in buildings. Information on the strengths and limitations, efficacy, cost, and byproducts of each method is presented, where available.

A multi-step, iterative process was used to ensure that all literature relevant to the scope of work was identified. The literature search identified a total of 92 documents, including peer-reviewed papers, conference proceedings, government and industry reports.

4.1 PCBs IN BUILDING MATERIALS

PCBs are a class of compounds that had important commercial uses prior to their ban in 1976 due to their association with adverse human and ecological impacts. Primarily used as a dielectric fluid in capacitors, transformers, and other electrical equipment, PCBs were also used as a component of some non-liquid construction materials and building products manufactured, including: caulking, other sealants, adhesives, paints, floor finishes, light ballasts of fluorescent lights and other items. Concentrations of PCBs in construction materials of many buildings have been reported to exceed levels authorized under the applicable federal regulations (40 CFR§761). Buildings constructed between the 1950s through late 1970s are at risk of having PCB-containing materials. Understanding available mitigation strategies for PCB-containing buildings is a critical issue for governmental, industry and commercial entities.

PCBs can be introduced into building materials in multiple ways. Some building materials, including sealants, paint, and light ballasts, were manufactured to contain PCBs and can be considered primary sources. Construction materials not intentionally manufactured with PCBs can accumulate PCBs released from primary source materials over time. Lastly, PCBs released from building materials are sometimes found in human exposure media such as indoor air, settled dust, and soil. The disposition of these PCB-containing materials, occupational hazards, waste byproducts, and cost are important considerations when evaluating and selecting a remediation method.

A list of building materials reported to contain PCBs in buildings is provided in Table 2.3. Direct human exposure media that have been reported to be impacted by PCBs released from building materials are also noted in the table. Caulk, applied primarily to exterior joints, was the most frequently reported material to be a primary source of PCBs. Caulk also had the highest reported concentration of PCBs with levels commonly in the range of 1,000 to 100,000 ppm and ranging up to approximately 750,000 ppm (ATC, 2010). The most commonly reported mixtures of PCBs in caulk were Aroclor 1254 and Aroclor 1248 (EH&E, 2010f; ATC, 2010; W&C, 2007). Paint and adhesives such as floor tile mastic were also frequently reported to be primary sources of PCBs (Bent et al., 1994; TRC Environmental, 2010). Porous materials such as concrete and brick were frequently reported as secondary sources of PCBs.

4.2 REMEDIATION METHODS

The literature search identified a wide range of methods for managing PCBs in building materials. Although diverse in purpose and approach, the methods can be grouped according to terminology suggested by EPA for environmental clean-up activities. In this context, *remediation* is an overarching term that encompasses removing PCBs from buildings or limiting the migration of PCBs from sources in buildings. *Abatement* refers to reducing the amount of PCBs in building materials. *Mitigation* is a complement to abatement and refers to controlling exposure to PCBs released from building materials without removing PCBs from a building. A conceptual framework for organizing the remediation methods is illustrated in Figure 2.1. The components of abatement and mitigation shown in the diagram are discussed in the following sections.

4.2.1 Abatement Methods

The objective of abatement is to reduce the mass of PCBs or PCB-containing materials in a building. Abatement consists of (i) source removal - removing primary and secondary source materials from a building and (ii) source modification - lowering the amount of PCBs in building materials through chemical degradation or extraction techniques. The performance of these approaches to abatement is summarized in Table 4.2 in terms of efficacy, cost, practicality, and potential hazards. These attributes of performance were rated on a relative scale (good, fair, poor) based on the information gathered from the literature review and EH&E's experience in managing remediation programs for PCB-containing building materials.

Source removal methods include physical removal and on-site decontamination of PCB-containing materials. Physical removal involves displacement of bulk material that contains PCBs followed by disposal according to applicable state and federal regulations. In the case of PCB caulking, hand tools such as utility knife, putty knife, scraper, ripping chisel, and bush hammer are typically used to pry beads of caulk from the seams in manageable lengths. Various types of abrasive blasting techniques are physical removal methods that have been applied to surface coatings that contain elevated concentrations of PCBs. In both cases, the removed caulk or surface coating is placed in sealed containers which are stored in a covered roll-off and subsequently disposed of as hazardous waste.

In addition to physical removal of PCB-containing materials, source removal can also be achieved through on-site decontamination. Several products and techniques for chemical degradation of PCBs in bulk product waste and remediation waste materials are described in the literature. In general, the products are applied to PCB-containing materials as a slurry or paste, covered by an overlying material, and left in place for days to weeks as required by the kinetics of the degradation reactions. Spent product and degradation products are waste byproducts of the process.

As shown in Table 4.2, source removal and decontamination methods have been demonstrated to be effective in general at attaining compliance with regulatory requirements. Although efficacious in many situations, source removal and modification procedures can be disruptive, expensive, and impractical in buildings that are occupied or are scheduled for demolition in the near future.

Methods commonly used to remove or modify PCB-containing materials can involve construction practices that generate noise, dust, gases, and require involved containment procedures similar to those used for asbestos. Destructive procedures for removing concrete, brick, mortar, and other substrates that have absorbed PCBs from source material such as caulk are often the most disruptive. Abatement activities can be highly disruptive for populated buildings, especially when swing space is not available. As a result, abatement is often undertaken most efficiently in unoccupied areas of a building or when a building is vacated such as during vacation periods for schools. In addition to being disruptive, destructive abatement methods and relocation of building occupants can be expensive as well. Disruption and cost associated with abatement of PCB-containing building materials can favor mitigation over abatement. Remediation approaches that control PCBs in building materials can therefore help organizations maintain continuity and control costs. In those circumstances, management of impacts arising from PCBs in building materials rather than abatement of the PCB-containing materials may be preferred.

4.2.2 Mitigation Methods

Mitigation refers to controlling impacts of building material-related PCBs without actually removing PCBs from source materials. The purpose of mitigation is to limit release of PCBs from building materials or their transfer to the environment and locations where people may be exposed. Engineering controls and administrative are two general approaches to mitigation of PCBs in building materials. These approaches consist of actions that block pathways of PCB transport, control concentrations of PCBs in exposure media, or establish building operations that minimize exposure to building-related PCBs.

Mitigation methods can provide interim measures of PCB control and can also be a component of activity undertaken following an abatement action or as part of a management in place program for residual PCBs in building materials. Interim measures are typically planned and implemented to provide an equivalent level of protection to permanent measures and to include activities that do not pose an unreasonable risk of injury to human health and the environment.

Engineering and administrative controls implemented alone or in combination can be effective at mitigating releases of PCBs to the environment and limiting exposure. The relative strengths and weaknesses of the common mitigation methods are summarized in Table 4.2. Engineering controls involve changes to the physical conditions of a building that reduce the magnitude of potential uncontrolled releases of PCBs and corresponding exposure. These controls can take many forms but are principally contact encapsulation; physical barriers; ventilation; and air cleaning.

Contact encapsulation refers to covering PCB-containing materials with an impermeable film or sealant. The sealant serves to reduce potential for dermal contact with PCBs and to retard release of PCB-containing materials or PCBs through weathering, mechanical degradation, or volatilization. Contact encapsulation is described in the literature as a mitigation method for PCB-containing caulk, paint, adhesive, and other materials. Numerous encapsulant products are described in the literature and include certain types of tape, sealants, and epoxies.

TABLE 4.2 Summary of Abatement and Mitigation Methods

Type of Remediation	Approach	Method	Cost and Time	Waste	Perfor (Regulatory)
ABATEMENT	Source Removal	Physical Removal	Fair – though the disposal cost is estimated at \$500 per ton (based on Region 1 data), the manual labor to remove the caul can be costly, \$100/linear ft or \$10-20 per square foot.	Poor – stress on landfills is a significant concern, competition for space with other hazardous waste.	Good – meets regi
	Source Modification	Chemical Extraction	Fair/Poor – depending on how many applications are required, and depth of contamination.	Poor – large amount of chemical containing PCBs, waste may be flammable.	Fair/Poor – mixed reports. In most case tion as post treatmer to evaluate efficacy, or 761.79(f
		Chemical Degradation	Fair – cost analysis reported for paint. The cost seems to depend on what the structural materials are; porous or non-porous material. Reaction times varies and are weather dependent, resulting in significant variability for time to complete.	Good – potentially large waste but with little PCB contamination.	Good - but has only locations (superfu cases, only been test als (prior to disposal to evaluate efficacy, and/or 761.7?
MITIGATION	Engineering Controls	Encapsulation	Good – can be significantly less expensive and faster to implement than source removal. In case of power wash, the cost will increase significantly.	Good/Poor – Minimal waste. In some cases, power wash of the surface is required prior to encapsulation, which leads to large amount of waste, potentially contaminated.	Fair - good for interi recognized or author regulations, need lo The product/brand sh fully, based on perfor
		Physical Barrier	Good – can be invasive.	NA	Fair – good for inte recognized or author in regu
		Ventilation	Good/Fair – depends on the capacity and efficiency of installed systems, generally not an option in naturally ventilated buildings.	NA	Fair - good for inte recognized or author in regu
		Cleaning	Good – can be significantly less expensive and faster to implement than source removal.	Good/Fair - Minimal waste, activated charcoals in the air cleaners need to be replaced periodically.	Fair – good for inte recognized or author in regulations. The p be chosen carefully, t and noi
	Administration Control	Space Assignment	Good – typically used in combination with other remediation methods.	NA	Fair -good for interi recognized or author regulz

Physical barriers constructed to separate areas with PCB-containing building materials from other areas of a building is another type of engineering control. In some cases, physical barriers such as fences and interior walls can be erected to prevent building occupants from coming into direct contact with PCB-containing building materials. In other cases, physical barriers can be used to minimize transport of PCB vapors from source materials to occupied areas of a building. Barriers to control vapor transport include sealants or foam applied to joints of building features that form interstitial spaces which include PCB-containing materials.

Ventilation with outdoor air and cleaning of indoor air are engineering controls that can be used to modify concentrations of PCBs in indoor air that are associated with volatilization from PCB-containing materials. Improvements or upgrades to existing ventilation systems have been shown to be effective at lowering concentrations of PCBs in indoor air. However, the cost of heating and cooling outdoor air can be a practical constraint on implementation of this mitigation method. Operation of air cleaners equipped with activated charcoal filters was described as effective at lowering PCB levels in indoor air in one report identified by the literature search.

Mitigation through administrative controls involve changes to the use or maintenance of a building that reduce the magnitude of potential occupant exposures to PCBs or the likelihood of uncontrolled releases of PCBs from source materials. A space assignment plan that places building occupants in locations that yield exposures below established targets for indoor air or other media is an example of an administrative control. Another type of administrative control is work plans for remediation programs which serve to ensure consistent and effective management of a remediation action for PCB-containing building materials. Similarly, implementation of an operations and maintenance plan for residual PCBs in building materials can be effective at evaluating the continued performance of other remediation methods. The performance measures of administrative controls can be informed by a site-specific assessment of PCB exposure and risk.

The selection of remediation methods should be determined on a case by case basis. Nonetheless, most reports indicate that the greatest control of PCBs in building materials is obtained when multiple remediation methods are employed. For example, source removal, encapsulation, and physical barriers in combination with improved ventilation have been successful at managing building-related PCBs in relation to both regulatory requirements and risk-based criteria. The costs of mitigating PCB-containing building materials can be substantial, a fact which underscores the importance of understanding site-specific conditions, establishing practical remediation goals, and selecting the most appropriate remediation methods. The cost for abatement and disposal of PCB-containing caulk and residual PCBs on adjacent surfaces has been reported to range from \$9 to \$18 per square foot of built space. For 200,000 to 300,000 square foot buildings, costs of mitigation have been approximately \$1 million to \$3 million. It is important to note that remediation cost varies significantly by type of building and with location (Dalvit, 2011; Strychaz, 2010; USACE, 2000). The majority of the abatement and disposal cost in those situations is related

to removal of residual PCBs on building materials adjacent to PCB-containing caulk. Alternatives to source removal for residual PCBs, such as a multi-component mitigation program, are expected to be less costly. The literature search identified several cases where mitigation was effective at controlling release of PCBs and subsequent human exposure.

4.3 RECOMMENDATIONS

This research was designed to be a review of available literature regarding mitigation methods. During the course of this research EH&E identified several opportunities for additional data gathering and analysis that could further the aims of U.S. EPA related to management of PCBs in building materials. EH&E makes the following recommendations for additional research:

- Expand the scope of this review to include information sources outside of the published literature such as EPA Regional PCB Coordinators and owners of large portfolios of property known or expected to be impacted by PCBs. This second group would include federal organizations such as the General Services Administration, NASA, U.S. Armed Forces and U.S. Postal Service, as well as State property management agencies. Non-governmental groups may include universities and commercial property owners.
- Conduct controlled and independent efficacy demonstrations and trials for a variety of chemical degradation and extraction procedures, as well as encapsulation methods. Performance over time and relevance to real-world conditions should be a focus of these trials.
- Characterize the long-term performance of mitigation methods, such as encapsulation. This can be accomplished by surveying contractors with active and closed remediation projects and collecting samples in those buildings over time.
- Develop guidance for establishing strategies to manage PCB-containing building materials and which detail procedures for:
 - characterizing the presence and condition of those materials,
 - assessing potential exposure to building-related PCBs,
 - selecting appropriate remediation methods, and
 - designing an operations and maintenance program.
- Conduct a cost-benefit analysis of abatement versus mitigation for PCB Bulk Product Waste (primary source materials) and PCB Remediation Waste (secondary source materials) to support policy decisions on management of PCB-containing materials. Consider:
 - amount (mass) of PCBs in primary and secondary source materials in buildings,
 - disruption of building operations associated with abatement and mitigation,
 - magnitude of human exposure to PCBs associated with primary and secondary source materials, and
 - efficacy, cost, and residual risk of abatement and mitigation methods.

► 5.0 REFERENCES

- Agency for Toxic Substances and Disease Registry (ATSDR). 2000. *Public Health Statement: Polychlorinated Biphenyls (PCBs)*. Washington, DC, USA: ATSDR. Web Link: <http://www.atsdr.cdc.gov/toxprofiles/tp17.pdf> [Accessed 19 December 2010].
- Andersson M, Ottesen RT, Volden T. 2004. Building materials as a source of PCB pollution in Bergen, Norway. *Science of the Total Environment* 325:139-144.
- ATC Associates, Inc. (ATC). 2010. *Final Completion Report for PCB Clean-Up and Disposal: One, Two & Three Center Plaza Exterior Façade, Boston, Massachusetts* prepared for MA-Center Plaza, L.L.C, Boston, MA, USA. September 15, 2010. Woburn, MA, USA: ATC.
- Balfanz E, Fuchs J, Kieper H. 1993. Sampling and analysis of polychlorinated biphenyls (PCB) in indoor air due to permanently elastic sealants. *Chemosphere* 26(5):871-880.
- Barkley NP. 1990. Update on building and structure decontamination. *Control Technology* 40(8):1174-1178.
- Bent S, Rachor-Ebbinghaus R, Schmidt C. 2000. Decontamination of highly polychlorinated biphenyl contaminated indoor areas by complete removal of primary and secondary sources. *Gesundheitswesen* 62(2):86-92. [Original in German, translated to English.]
- Bent S, Bohm K, Boschemeyer L, Gahle R, Kortmann F, Michel W, Schmidt C, Weber F. 1994. Management of indoor air pollution by polychlorinated biphenyl compounds exemplified by two Hagen schools. *Gesundheitswesen* 56(7):394-398. [Original in German, translated to English.]
- Benthe C, Heinzow B, Jessen H, Mohr S, Rotard W. 1992. Polychlorinated biphenyls: indoor air contamination due to Thiokol-rubber sealants in an office building. *Chemosphere* 25(7-10):1481-1486.
- Bleeker I, Tilkes F, Fischer AB, Eikmann T. 1999. PCB contaminations of buildings and decontamination Measures. *Organohalogen Compounds* 43:453-456.
- Broadhurst MG. 1972. Use and replaceability of polychlorinated biphenyls. *Environmental Health Perspectives* 2:81-102.
- Centers for Disease Control and Prevention (CDC). 1987. Epidemiological notes and reports PCB contamination of ceiling tiles in public buildings – New Jersey. *Morbidity and Mortality Weekly Report (MMWR)* 36(6):89-91. Web Link: <http://www.cdc.gov/mmwr/preview/mmwrhtml/00000872.htm> [Accessed 19 December 2010].

Chang MP, Coghlan KM, McCarthy JM. 2002. Remediating PCB-containing building products: strategies and regulatory considerations. In: *Indoor Air 2002, Proceedings: 9th International Conference on Indoor Air Quality and Climate, Vol. 4* (Levin H, ed). Monterey, CA, USA. June 30–July 5 2002. Santa Cruz, CA, USA: *Indoor Air 2002*, 171-176. Web Link: <http://www.pcbinschools.org/PCB%20Remediation.pdf> [Accessed 19 December 2010].

Coghlan KM, Chang MP, Jessup DS, Fragala MA, McCrillis KA, Lockhart TM. 2002. Characterization of Polychlorinated Biphenyls in Building Materials and Exposures in the Indoor Environment. In: *Indoor Air 2002, Proceedings: 9th International Conference on Indoor Air Quality and Climate, Vol. 4* (Levin H, ed). Monterey, CA, USA. June 30–July 5 2002. Santa Cruz, CA, USA: *Indoor Air 2002*, 147–152. Web Link: <http://www.pcbinschools.org/Characterize%20pcb.pdf> [Accessed 19 December 2010].

Dalvit D. 2011. *Cost per Square Foot of Commercial Construction by Region*. Denver, CO, USA: EVstudio. Web Link: <http://evstudio.info/cost-per-square-foot-of-commercial-construction-by-region/> [Accessed 28 June 2011].

Environmental Health & Engineering, Inc. (EH&E). 2011a. *Memorandum regarding Surface Samples Collected on April 21, 2011, Estabrook Elementary School* prepared for the Town of Lexington and Lexington Public Schools, Lexington, MA, USA. June 8, 2011. Needham, MA, USA: EH&E. Web Link: http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/Surface%20Memorandum%20060811%20_EHE%2017228_.pdf [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2011b. *Site-Specific Assessment for Polychlorinated Biphenyls Estabrook School* prepared for the Town of Lexington and Lexington Public Schools, Lexington, MA, USA. February 26, 2011. Needham, MA, USA: EH&E. Web Link: <http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/Final%20Site-Specific%20Assessment.pdf> [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2010a. *Memorandum regarding Air Samples Collected on November 11, 2010, Estabrook Elementary School* prepared for the Town of Lexington and Lexington Public Schools, Lexington, MA, USA. November 30, 2010. Needham, MA, USA: EH&E. Web Link: http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/Memo%20_EHE%2017228_.pdf [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2010b. *Memorandum regarding Air Samples Collected on November 4, 2010, Estabrook Elementary School* prepared for the Town of Lexington and Lexington Public Schools, Lexington, MA, USA. November 10, 2010. Needham, MA, USA: EH&E. Web Link: http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/Estabrook_EHE%2017228_.pdf [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2010c. *Memorandum regarding Air Samples Collected on October 18-19, 2010, Estabrook Elementary School* prepared for the Town of Lexington

and Lexington Public Schools, Lexington, MA, USA. October 28, 2010. Needham, MA, USA: EH&E. Web Link: http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/Project%20Update%2010-28-10%20_EHE%2017228_.pdf [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2010d. *Letter regarding Remaining Emissions of PCBs in Indoor Air of Estabrook Elementary School* prepared for Lexington Public Schools and the Town of Lexington, Lexington, MA, USA. October 19, 2010. Needham, MA, USA: EH&E. Web Link: http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/K-1%20Wing%20Assessment%20_EHE%2017228_.pdf [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2010e. *Memorandum regarding Air Samples Collected on September 27, 2010, Estabrook Elementary School* prepared for the Town of Lexington and Lexington Public Schools, Lexington, MA, USA. October 6, 2010. Needham, MA, USA: EH&E. Web Link: http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/Project%20Update%2010-06-10%20_EHE%2017228_.pdf [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2010f. *Project Update, Estabrook Elementary School, Lexington, Massachusetts* prepared for the Town of Lexington, Lexington, MA, USA. September 10, 2010. Needham, MA, USA: EH&E. Web Link: http://lps.lexingtonma.org/cms/lib2/MA01001631/Centricity/Domain/547/Health/Project%20Update%2009-10-10%20_EHE%2017228_.pdf [Accessed 1 October 2011].

Environmental Health & Engineering, Inc. (EH&E). 2007a. *Lederle Graduate Research Center: Abatement Project – Tower A and Low-Rise* presented to the University of Massachusetts-Amherst. Amherst, MA, USA. May 23, 2007. Newton, MA, USA: EH&E. Web Link: <http://www.ehs.umass.edu/PCB%20data/UMass%20Presentation%20May%202007.pdf> [Accessed 12 December 2010].

Environmental Health & Engineering, Inc. (EH&E). 2007b. *Lederle Graduate Research Center, Abatement Project, Tower A and Low-Rise, University of Massachusetts, Amherst, MA: Plan for the Removal and Abatement of Building-Related Polychlorinated Biphenyls* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. February 21, 2007. Newton, MA, USA: EH&E. Web Link: <http://www.ehs.umass.edu/Abatement%20Plan-Prepared%20for%20EPA%20by%20EH&S-2-21-07.pdf> [Accessed 12 December 2010].

Fragala, MA. 2010. *Managing the Risks of PCBs in Construction and Renovation Projects* presented at the *Maine IAQ Conference*. Augusta, ME, USA. March 24, 2010. Web Link: <http://www.maineindoorair.org/Fragala%20Managing%20PCB%20Presentation%202010%20Maine%20IAQ%20Handouts.pdf> [Accessed 12 December 2010].

Funakawa M, Takada M, Mami N, Masaaki H. 2002. Volatilization of PCB from PCB-containing ballast in fluorescent lamp and indoor PCB pollution. *Journal of Environmental Chemistry* 12(3):615-620.

- Gabrio T, Piechotowski I, Wallenhorst T, Klett M, Cott L, Friebel P, Link B, Schwenk M. 2000. PCB blood levels in teachers, working in PCB-contaminated schools. *Chemosphere* 40:1055-1062.
- Hamel J, Morgenstern B. 2009. PCBs in Historic Building Materials: Showing Up in More Places Than You Think presented at the *New Hampshire College and University Compliance Assistance Cooperative (NHC3UA) Pollution Prevention Workshop*. Keene, NH, USA. March 20, 2009. Web Link: <https://nhc3ua.org/online-training/pollution-prevention-presentations-03-20-09/Final%20PCBs%20in%20Building%20Materials%202009%20NHC3UA.pdf/view> [Accessed 12 December 2010].
- Heinzow B, Mohr S, Ostendorp G, Kerst M, Korner W. 2007. PCB and dioxin-like PCB in indoor air of public buildings contaminated with different PCB sources – deriving toxicity equivalent concentrations from standard PCB congeners. *Chemosphere* 67(9):1746-1753.
- Heinzow B, Mohr S, Ostendorp G, Kerst M, Korner W. 2004. Dioxin-like PCB in indoor air contaminated with different sources. *External and Internal Human Exposure* 66:2470-2476.
- Hellman S, Puhakka J. 2001. Polychlorinated biphenyl (PCB) contamination of apartment building and its surroundings by construction block sealants. *Geological Survey of Finland* 32:123-127.
- Herrick RF. 2010. PCBs in school-persistent chemicals, persistent problems. *New Solutions* 20(1):115-126.
- Herrick RF, Lefkowitz DJ, Weymouth GA. 2007. Soil contamination from PCB-containing buildings. *Environmental Health Perspectives* 115(2):173-175.
- Herrick RF, McClean MD, Meeker JD, Baxter LK, Weymouth GA. 2004. An unrecognized source of PCB contamination in schools and other buildings. *Environmental Health Perspectives* 112(10):1051-1053.
- Hesse JL. 1975. Polychlorinated Biphenyl Usage and Sources of Loss to the Environment in Michigan. In: Conference Proceedings of the *National Conference on Polychlorinated Biphenyls*. Chicago, IL, USA. November 19-21, 1975. Web Link: <http://books.google.com/books/reader?id=0OsJAQAAMAAJ&lr=&printsec=frontcover&output=reader> [Accessed 1 July 2011].
- Jartun M, Ottesen R, Volden T, Lundkvist Q. 2009a. Local sources of polychlorinated biphenyls (PCB) in Russian and Norwegian settlements on Spitsbergen Island, Norway. *Journal of Toxicology and Environmental Health* 72:284-294.
- Jartun M, Ottesen R, Steinnes E, Volden T. 2009b. Painted surfaces—important sources of polychlorinated biphenyls (PCBs) contamination to the urban and marine environment. *Environmental Pollution* 157:295-302.

- Kohler M, Tremp J, Zennegg M, Seiler C, Minder-Kohler S, Beck M, Lienemann P, Wegmann L, Schmid P. 2005. Joint sealants: an overlooked diffuse source of polychlorinated biphenyls in buildings. *Environmental Science and Technology* 39:1967-1973.
- Kontsas H, Pekari K, Riala R, Back B, Rantio T, Priha E. 2004. Worker exposure to polychlorinated biphenyls in elastic polysulphide sealant renovation. *The Annals of Occupational Hygiene* 48(1):51-55.
- Kume A, Monguchi Y, Hattori K, Nagase H, Sajiki H. 2008. Pd/C-catalyzed practical degradation of PCBs at room temperature. *Applied Catalysis B: Environmental* 81(3-4):274-282.
- Kuusisto S, Lindroos O, Rantio T, Priha E, Tuhkanen T. 2007. PCB contaminated dust on indoor surfaces—health risks and acceptable surface concentrations in residential and occupational settings. *Chemosphere* 67(6):1194-1201.
- Lexington Public Schools (LPS). 2010. *Update on Estabrook Environmental Concerns, Superintendent of Schools, Lexington Public Schools (LPS)*. October 14, 2010. Web Link: http://lps.lexingtonma.org/Current/Healthandsafety/Estabrook/Superintendent%27s%20Estabrook%20Update%20Letter%2010_14_10.pdf [Accessed 12 December 2010].
- Li Y, Harner T, Liu L, Zhang Z, Ren N, Jia H, Ma J, Sverko E. 2010. Polychlorinated biphenyls in global air and surface soil: distributions, air–soil exchange, and fractionation effect. *Environmental Science & Technology* 44:2784-2790.
- Liebl B, Schettgen T, Kerscher G, Broding HC, Otto A, Angerer J, Drexler H. 2004. Evidence for increased internal exposure to lower chlorinated polychlorinated biphenyls (PCB) in pupils attending a contaminated school. *International Journal of Hygiene and Environmental Health* 207(4):315-324.
- Ljung M, Maria Olsson M, Tolstoy N. 2002. Research and Development in Sanitation Technology for PCB-Containing Sealants presented at *Building Physics 2002 - 6th Nordic Symposium – Session 19: Building Design and Technology 1*. Trondheim, Norway. June 17-19, 2002.
- MacIntosh DL, Minegishi T, Allen JG, Levin-Schwartz Y, McCarthy JF, Stewart JH, Coghlan KM. 2011. Risk Assessment for PCBs in Indoor Air of Schools at *Indoor Air 2011: The 12th International Conference on Indoor Air Quality and Climate*. Austin, TX, USA. June 5-10, 2011. Web Link: <http://www.abstractsonline.com/Plan/ViewAbstract.aspx?sKey=dab0b12b-98a8-4fc6-addf-7ab1c6656856&cKey=abadbfc7-1761-4d01-8929-b0061efacbd6&mKey={F53D1928-C445-406FA24B-297CA9654D92}> [Accessed 6 June 2011].
- MacLeod KE. 1981. Polychlorinated biphenyls in indoor air. *Environmental Science & Technology* 15(8):926-928.

- Mitchell SJ, Scadden RA. 2001. PCB Decontamination Methods for Achieving TSCA Compliance During Facility Decommissioning Projects: Technical Paper #0102 presented at the *NDIA 27th Environmental Symposium and Exhibition*. Austin, TX, USA. April 25, 2001. Web Link: http://www.westonsolutions.com/about/news_pubs/tech_papers/MitchellNDIA01.pdf [Accessed 12 December 2010].
- Moglia D, Smith A, MacIntosh DL, Somers, JL. 2006. Prevalence and implementation of IAQ programs in U.S. schools. *Environmental Health Perspectives* 114:141-146.
- National Institute for Occupational Safety and Health (NIOSH). 1975. November 3. *Current Intelligence Bulletin, Polychlorinated Biphenyls (PCBs)*. Washington, DC, USA: NIOSH. Web Link: http://www.cdc.gov/niosh/78127_7.html#table3 [Accessed 12 December 2010].
- National Research Council (NRC). 1979. *Polychlorinated biphenyls*. A Report Prepared by the Committee on the Assessment of Polychlorinated Biphenyls in the Environment, Environmental Studies Board. Washington, DC, USA: National Academies of Sciences.
- New York City Department of Education (NYC DOE). 2010. *Pilot Study Test Results 2010 – Updated as of 5/27/2011*, New York City Department of Education (NYC DOE). May 27, 2011. Web Link: <http://source.nycsca.org/pdf/epa/PilotStudyTestResults2010.pdf> [Accessed 1 July 2011].
- Novaes-Card SE, Maloney PR, Saitta EH, Geiger CL, Clausen CA. 2010. Magnesium and Acetic Acid/Ethanol Solution for Degradation of Polychlorinated Biphenyls: From Laboratory Kinetics to Application presented at the *Remediation of Chlorinated and Recalcitrant Compounds, Eighth International Conference*. Monterey, CA, USA. May 21-24, 2010. Web Link: http://www.battelle.org/conferences/chlorinated/prel_prog.pdf [Accessed 12 December 2010].
- Persson NJ, Pettersen H, Ishaq R, Axelman J, Bandh C, Broman D, Zubuhr Y, Hammar T. 2005. Polychlorinated biphenyls in polysulfide sealants—occurrence and emission from a landfill station. *Environmental Pollution* 138(1):18-27.
- Pizarro GEL, Dzombak DA, Smith JR. 2002. Evaluation of cleaning and coating techniques for PCB-contaminated concrete. *Environmental Progress* 21(1):47-56.
- Priha E, Rantio T, Riala R, Back B, Oksa P. 2005. Quantitative risk assessment in relation to occupational exposure to polychlorinated biphenyls in the removal of old sealants from buildings. *Scandinavian Journal of Work and Environmental Health* 31 Suppl 2:43-48.
- Quinn J, Clausen C, Geiger C, Captain J, Ruiz N, O'Hara S, Krug T. 2010. Application of a Bimetallic Solvent Paste Technology for PCB Removal from Older Structures on DoD Facilities presented at the *Remediation of Chlorinated and Recalcitrant Compounds, Eighth International Conference*. Monterey, CA, USA. May 21-24, 2010. Web Link: http://www.battelle.org/conferences/chlorinated/prel_prog.pdf [Accessed 12 December 2010].

- Rall DP. 1975. *Introductory Remarks – Session I: Health Effects and Human Exposure*. In: Conference Proceedings of the National Conference on Polychlorinated Biphenyls. Chicago, IL, USA. November 19-21, 1975.
- Robson M, Melymuk L, Csiszar SA, Giang A, Diamond ML, Helm PA. 2010. Continuing sources of PCBs: the significance of building sealants. *Environment International* 36(6):506-513.
- Rudel RA, Seryak LM, Brody JG. 2008. PCB-containing wood floor finish is a likely source of elevated PCBs in residents' blood, household air and dust: a case study of exposure. *Environmental Health* 7:2.
- Ruiz N, Krug T, O'Hara S, Quinn J, Clausen C, Geiger C, Captain J. 2010. *Application of a Bimetallic Treatment System (BTS) for PCB Removal from Older Structures on DoD Facilities (Technical Report TR-2352-ENV)* prepared for Naval Facilities Engineering Service Center (NAVFAC ESC) and Environmental Security Technology Certification Program. November 2010. Port Hueneme, CA, USA: NAVFAC ESC. Web Link: https://portal.navy.mil/portal/page/portal/docs/doc_store_pub/tr-2352-env.pdf [Accessed 1 July, 2011]
- Scadden RA, Mitchell SJ. 2001. A Case Study of the Continued Use of PCB-Contaminated Concrete Through Implementation of the 40 CFR 76130(p) Use Authorization: Technical Paper #0204 presented at the *10th Annual RCS National Convention*. Austin, TX, USA. October 2001. Web Link: http://www.westonsolutions.com/about/news_pubs/tech_papers/ScaddenRCS2001.pdf [Accessed 12 December 2010].
- Schwenk M, Gabrio T, Papkeb O, Wallenhorst T. 2002. Human biomonitoring of polychlorinated biphenyls and polychlorinated dibenzodioxins and dibenzofuranes in teachers working in a PCB contaminated school. *Chemosphere* 47(2):229-233.
- Science Applications International Corporation (SAIC). 1992. *Remediation Plan for Fluorescent Light Fixtures Containing Polychlorinated Biphenyls (PCBs)* prepared for Oak Ridge K-25 Site. April 30, 1992. Oak Ridge, TE, USA: SAIC. Web Link: <http://www.osti.gov/bridge/servlets/purl/176786-uaECFV/webviewable/176786.pdf> [Accessed 12 December 2010].
- Staiff DC, Quinby GE, Spencer DL, Starr HG, Jr. 1974. Polychlorinated biphenyl emission from fluorescent lamp ballasts. *Bulletin of Environmental Contamination & Toxicology* 12(4):455-463.
- Strychaz SJ, ed. 2010. *Square Foot Building Costs: Commercial, Industrial, Institutional*. Chatsworth, CA, USA: Saylor Publications, Inc. Web Link: <http://www.saylor.com/lacosts/#Commercial,%20Industrial,%20Institutional> [Accessed 6 June 2011].
- Sundahl M, Sikander E, Ek-Olausson B, Hjorthage A, Rosell L, Tornevall M. 1999. Determinations of PCB within a project to develop cleanup methods for PCB-containing elastic sealant used in outdoor joints between concrete blocks in buildings. *Journal of Environmental Monitoring* 1(4):383-387.

Tanner DM. 2010. *It Situ Remediation of PCBs without Toxic Byproducts*, Paper #13 presented at the *AWMA International Conference on Thermal Treatment Technologies & Hazardous Waste Combustors*. San Francisco, CA, USA. May 17-20, 2010. Web Link: http://secure.awma.org/presentations/IT3_HWC10/Papers/a13.pdf [Accessed 19 December 2010].

TRC Engineers, Inc. (TRC Engineers). 2010a. *PCB Pilot Study Bulk Building Material Sampling Results: Draft Summary Report* prepared for New York City School Construction Authority. October 14, 2010. New York, NY, USA: TRC Engineers. Web Link: <http://source.nycsca.org/pdf/epa/BulkBuildingMaterialSamplingSummaryReport.pdf> [Accessed 19 December 2010].

TRC Engineers, Inc. (TRC Engineers). 2010b. *PCB Pilot Study Pre-Remedial Baseline Air Sampling Results: Draft Summary Report* prepared for New York City School Construction Authority. August 18, 2010. New York, NY, USA: TRC Engineers. Web Link: <http://source.nycsca.org/pdf/epa/Pre-RemedialBslnAirSampleResultsDraftRpt08-20-10.pdf> [Accessed 19 December 2010].

TRC Engineers, Inc. (TRC Engineers). 2010c. *Remedial Investigation Work Plan for the New York City School Construction Authority Pilot Study to Address PCB Caulk in New York City School Buildings, EPA Consent Agreement and Final Order, Docket Number: TSCA-02-2010-9201* prepared for New York City School Construction Authority. April 19, 2010. New York, NY, USA: TRC Engineers. Web Link: <http://www.pcbinschools.org/RIWP%20Final%20Draft%20.pdf> [Accessed 19 December 2010].

TRC Environmental Corporation (TRC Environmental). 2010. *Removal and Abatement Plan: New Bedford High School Building Interior PCB Removal & Abatement Plan* prepared for City of New Bedford, Department of Environmental Stewardship. March 2010. Lowell, MA, USA: TRC Environmental. Web Link: <http://www.newbedford-ma.gov/McCoy/2010/L2010-078.pdf> [Accessed 19 December 2010].

Triumvirate Environmental Inc. (TEI). 2009. *PCBs in Building Materials: Liabilities & Remediation* presented at *TEI EPA Inspection Preparedness/PCB Update Roundtable*. Somerville, MA, USA. December 16, 2009. Web Link: <http://www.triumvirate.com/epa-inspection-preparedness-pcb-update/> [Accessed 19 December 2010].

U.S. Army Corps of Engineers (USACE). 2000. March 30. *Civil Works Construction Cost Index System (CWCCIS) – Tables Revised as of 30 September 2010: EM 1110-2-1304*. Washington, DC, USA: Department of the Army. Web Link: http://140.194.76.129/publications/eng-manuals/em1110-2-1304/EC_1110-2-1304_2011Mar.pdf [Accessed 19 December 2010].

U.S. Energy Information Administration (EIA). 2008. September. *2003 CBECS Detailed Tables*. Washington, DC, USA: U.S. Department of Energy. Web Link: http://www.eia.gov/emeu/cbecs/cbecs2003/detailed_tables_2003/detailed_tables_2003.html [Accessed 1 July 2011].

U.S. Environmental Protection Agency (EPA). 2011a. June 30. *PCBs in Caulk in Older Buildings*. Washington, DC, USA: EPA. Web link: <http://www.epa.gov/pcbsincaulk/> [1 July 2011].

U.S. Environmental Protection Agency (EPA). 2011b. March 30. *Terms of Environment: Glossary, Abbreviations and Acronyms*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/OCEPATerms/> [Accessed 6 June 2011].

U.S. Environmental Protection Agency (EPA), Region 2. 2011c. February 28. EPA Inspection for PCB-Containing Lighting Ballasts PS 306 in Brooklyn, New York. New York, NY, USA: EPA, Region 2. Web link: <http://www.epa.gov/region2/pcbs/ps306results.html> [Accessed 6 June 2011].

U.S. Environmental Protection Agency (EPA). 2010a. December 29. *Polychlorinated Biphenyls: Proper Maintenance, Removal, and Disposal of PCB-Containing Fluorescent Light Ballasts*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/epawaste/hazard/tsd/pcbs/pubs/ballasts.htm#ballast12> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2010b. October 12. *Polychlorinated Biphenyls: Laws and Regulations*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/epawaste/hazard/tsd/pcbs/pubs/laws.htm> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2010c. April 21. *Steps to Safe Renovation and Abatement of Buildings That Have PCB-Containing Caulk – Abatement Step 1: Prepare an Abatement Strategy*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/pcbsincaulk/guide/guide-sect4a.htm> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2010d. October 20. *Steps to Safe Renovation and Abatement of Buildings That Have PCB-Containing Caulk – Abatement Step 2: Conduct Removal and Abatement Activities*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/pcbsincaulk/guide/guide-sect4b.htm> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2010e. April 21. *Steps to Safe Renovation and Abatement of Buildings That Have PCB-Containing Caulk – Abatement Step 3: Handling, Storing, and Disposing of Wastes*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/pcbsincaulk/guide/guide-sect4c.htm> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2010f. April 21. *Steps to Safe Renovation and Abatement of Buildings That Have PCB-Containing Caulk – Abatement Step 4: Prepare and Maintain Documentation*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/pcbsincaulk/guide/guide-sect4d.htm> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2010g. April 21. *Steps to Safe Renovation and Abatement of Buildings That Have PCB-Containing Caulk – Appendix: Summary of Tools and Methods for Caulk Removal*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/pcbsincaulk/guide/guideappendix.htm> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2009a. October 2. PCB Exposure Estimation Tool. Washington, DC, USA: EPA. Web Link: www.pcbinschools.org/PCBs-SchoolsDose_10-2-09_v1-1.xls [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2009b. October. *Current Best Practice for PCBs in Caulk Fact Sheet – Interim Measures for Assessing Risk and Taking Action to Reduce Exposures*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/pcbsincaulk/maxconcentrations.htm> [Accessed 1 July 2011].

U.S. Environmental Protection Agency (EPA). 2009c. September 25. *Public Health Levels for PCBs in Indoor School Air*. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/pcbsincaulk/maxconcentrations.htm> [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 2007. *Energy Star® Building Upgrade Manual*. Washington, DC, USA: EPA. Web Link: http://www.energystar.gov/ia/business/EPA_BUM_Full.pdf [Accessed 12 December 2010].

U.S. Environmental Protection Agency (EPA). 1993. *PCBs in fluorescent light fixtures*, U.S. Environmental Protection Agency, Region 10, Air and Toxics Division; U.S. Government Printing Office, Washington, DC.

U.S. Environmental Protection Agency (EPA). 1976. Toxic Substances Control Act (TSCA) of 1976; 15 USC (C. 53) 2601-2692. Title I – Control of Toxic Substances (*40 CFR Parts 700-766*). Part 761 – Polychlorinated biphenyls (PCBs) manufacturing, processing, distribution in commerce, and use prohibitions. Washington, DC, USA: EPA. Web Link: <http://www.epa.gov/regulations/laws/tsca.html> [Accessed 19 December 2010].

United Nations Environment Programme (UNEP). 1999. August. *Guidelines for the Identification of PCBs and Materials Containing PCBs*. UNEP Chemicals: Geneva, Switzerland. Web Link: <http://www.chem.unep.ch/Publications/pdf/GuidIdPCB.pdf> [Accessed 19 December 2010].

University of Rhode Island (URI). 2001. March 9. Press Release – Phase II Suspected Materials Testing Results. Kingston, RI, USA: URI Department of Communications/ News Bureau. Web Link: <http://www.uri.edu/news/releases/html/chafee-phaseII.htm> [Accessed 19 December 2010].

VanSchalkwyk W. 2009. Managing PCBs in Our Infrastructure presented at *Triumvirate Environmental Inc. (TEI) Roundtable Series: PCBs in Building Caulk: A Primer*. Somerville, MA, USA. October 20, 2009. Web Link: <http://www.triumvirate.com/pcbs-in-caulk-roundtable> [Accessed 12 December 2010].

Woodard & Curran Inc. (W&C). 2010a. *PCB Remediation Final Completion Report, Stone-Davis Hall, Wellesley College, Wellesley, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. December 7, 2010. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2010b. *Approval Modification Request No.2, Addendum 1, Soil Remediation Plan – Buildings A, B, C, Peabody Terrace Housing Facility, 900 Memorial Drive, Cambridge, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. November 18, 2010. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2010c. *PCB Remediation Plan, Southwest Residential Area Concourse Replacement Project, University of Massachusetts - Amherst Campus* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. June 25, 2010. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2010d. *Final Completion Report – PCB Remediation: MIT W85 Westgate Housing Complex, Cambridge, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. March 2010. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2010e. *PCB Remediation Plan, Building B, C, X – Harvard University, Cambridge, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. April 2010. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2010f. *Peabody Terrace Façade Project – PCB Remediation Plan, Building A – Harvard University, Cambridge, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. February 2010. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2009. *PCBs in Caulking: Real Site Data and Recent EPA Developments*. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2008a. *PCBs in Common Building Materials – What Every Building Owner Should Know*. September 17 2008. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2008b. *Long Term Monitoring and Maintenance Plan, W85 Westgate Housing Facility, Cambridge, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. July 2008. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2008c. *Full Scale Pilot Test Report and Revised PCB Remediation Plan, MIT W85 Westgate Housing Facility, Cambridge, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. February 27, 2008. Andover, MA, USA: W&C.

Woodard & Curran Inc. (W&C). 2007. *Self-Implementing Cleanup and Disposal Plan, Decontamination Plan, and request for Risk-Based Disposal, Massachusetts Institute of Technology, 77 Massachusetts Avenue, Cambridge, MA* prepared for U.S. Environmental Protection Agency, Region I, Boston, MA, USA. October 2, 2007. Andover, MA, USA: W&C.

► APPENDIX A

Name	Publisher	Description/Reason For Inclusion
MEDLINE®	National Library of Medicine	Identify studies published in peer-reviewed scholarly journals with focus on clinical medicine in the United States. MEDLINE is searchable on the Web via PubMed.
Infotrieve®	Infotrieve, Inc.	Identify studies published in pre-reviewed scholarly journals, conference proceedings and government documents. A global full-service information management company – including contents of almost 150 of the leading scientific, technical, and medical publishers.
ScienceDirect®	Elsevier	Identify studies published in peer-reviewed scholarly journals not covered in MEDLINE. Coverage is more international than MEDLINE.
Pascal	Wolters Kluwer Health/OVID	Capture European literature not otherwise included medically oriented databases – basic science, environmental health, chemistry, and biology.
Web of Science	Thomson Reuters	International coverage of the scientific and biomedical literature, including over 10,000 journals worldwide and over 110,000 conference proceedings.
BIOSIS Previews®	Thomson Reuters	Identify original research reports and reviews in biological and biomedical areas, as well as content summaries, books, and meeting abstracts. This is the world's most comprehensive reference database for life science research.
Enviroline®	Dialog	International coverage of periodicals particularly focused on the environment.
British Library	British Library	Access to British Library catalogue, including millions of books and journals online. Also, "Inside Conferences" – complete coverage of conference literature.
NTIS	National Technical Information Service	Covers primarily U.S. federal government-sponsored technical reports from agencies including the EPA, DOE, and HUD, with some coverage of state and local documents. Also includes technical reports from certain agencies in other countries including Japan, the UK, Germany and France.
OSTI	DOE Office of Scientific and Technical Information	International scientific and technical research literature.
EPA Publications Office	US Environmental Protection Agency	Primarily covers US environmental regulations, proposed rulings, government-sponsored technical reports, etc.
ERIC	Educational Resources Information Center	Database with access to more than 1.3 million bibliographic records of journal articles, books, research syntheses, conference papers, technical reports, and policy papers.
EC Research and EC Joint Research Centre	European Commission	Captures EC literature, including latest advances in research, with access to Europa and CORDIS databases.
UN Documentation: Research Guide	United Nations	United Nations documentation, including reports, resolutions and meeting records. International scientific and technical research literature focusing on various environmental and human health issues.
WHO	World Health Organization	Identify WHO documents and research access to WHOLIS (WHO Library and Information Networks for Knowledge) database.

185 DAMASCUS RD

Location 185 DAMASCUS RD **Assessment** \$18,456,000
Mblu G07/000 002/ 00001/ / **Appraisal** \$26,365,600
Acct# 011048 **PID** 5244
Owner BRANFORD TOWN OF **Building Count** 1

Current Value

Appraisal			
Valuation Year	Improvements	Land	Total
2014	\$25,198,800	\$1,166,800	\$26,365,600
Assessment			
Valuation Year	Improvements	Land	Total
2014	\$17,639,200	\$816,800	\$18,456,000

Owner of Record

Owner BRANFORD TOWN OF **Sale Price** \$0
Co-Owner **Certificate**
Address 1019 MAIN ST **Book & Page** 0192/0227
 BRANFORD, CT 06405 **Sale Date** 08/04/1964

Ownership History

Ownership History				
Owner	Sale Price	Certificate	Book & Page	Sale Date
BRANFORD TOWN OF			0192/0227	08/04/1964
BRANFORD TOWN OF INTERMEDIATE			/	
BRANFORD TOWN OF INTERMEDIATE				

Building Information

Building 1 : Section 1

Year Built: 1971
Living Area: 180456
Replacement Cost: \$32,288,945
Building Percent: 76
Good:
Replacement Cost
Less Depreciation: \$24,539,600

Building Photo


Building Attributes	
Field	Description
STYLE	Public School
MODEL	Comm/Ind

Grade	C +
Stories:	2
Occupancy	1
Exterior Wall 1	Brick
Exterior Wall 2	
Roof Structure	Flat
Roof Cover	T&G/Rubber
Interior Wall 1	Minim/Masonry
Interior Wall 2	
Interior Floor 1	Vinyl/Asphalt
Interior Floor 2	
Heating Fuel	Gas
Heating Type	Hot Water
AC Type	None
Bldg Use	MUN PUB SC MDL94
Total Rooms	
Total Bedrms	00
Total Baths	0
1st Floor Use:	903J
Heat/AC	HEAT/AC SPLIT
Frame Type	LT STEEL
Baths/Plumbing	AVERAGE
Ceiling/Wall	SUS-CEIL & WL
Rooms/Prtns	ABOVE AVERAGE
Wall Height	18
% Comn Wall	0



(http://images.vgsi.com/photos/BranfordCTPhotos//\00\01\43\18.jpg)

Building Layout

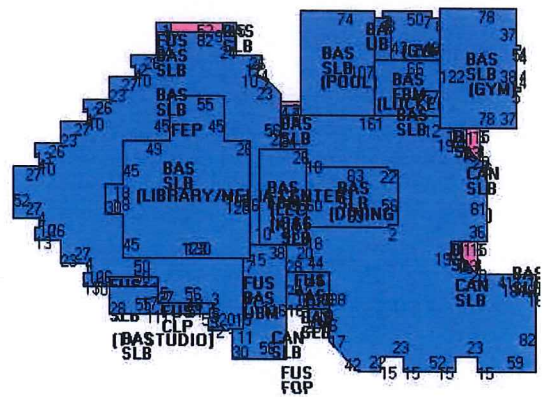

Building Sub-Areas		Legend	
Code	Description	Gross Area	Living Area
BAS	First Floor	138906	138906
FUS	Upper Story, Finished	41550	41550
CAN	Canopy	850	0
CLP	Loading Platform Covered	546	0
FBM	Basement, Finished	8370	0
FEP	Porch, Enclosed	468	0
FOP	Porch, Open	272	0
SLB	Slab	123865	0
UBM	Basement, Unfinished	6133	0
		320960	180456

Extra Features

Extra Features				Legend
Code	Description	Size	Value	Bldg #
SPR2	WET/CONCEALED	171824 S.F.	\$169,800	1
A/C	AIR CONDITION	170038 S.F.	\$284,300	1
ELV2	PASS ELEV	2 STOPS	\$33,400	1
MEZ1	MEZZANINE-UNF	800 S.F.	\$6,100	1

Land

Land Use

Use Code 903J
Description MUN PUB SC MDL94
Zone R4
Neighborhood 0070
Alt Land Appr No
Category

Land Line Valuation

Size (Acres) 29.01
Frontage
Depth
Assessed Value \$816,800
Appraised Value \$1,166,800

Outbuildings

Outbuildings						Legend
Code	Description	Sub Code	Sub Description	Size	Value	Bldg #
PAV1	PAVING-ASPHALT			99500 S.F.	\$82,100	1
LT9	HGH PRE-SOD PL			7 UNITS	\$5,300	1
LT10	W/DOUBLE LIGHT			5 UNITS	\$5,800	1
LT12	W/FOUR LIGHTS			4 UNITS	\$8,200	1
TEN1	TENNIS COURT			3 UNITS	\$30,000	1
SHD1	SHED FRAME			200 S.F.	\$1,200	1
SPL1	POOL-INGR CONC			2550 S.F.	\$25,500	1
FN1	FENCE-4' CHAIN			360 L.F.	\$1,200	1
FN3	FENCE-6' CHAIN			120 L.F.	\$600	1
FN4	FENCE-8' CHAIN			100 L.F.	\$600	1
FN5	FENCE-10'CHAIN			70 L.F.	\$500	1
LT1	LIGHTS-IN W/PL			6 UNITS	\$4,600	1

Valuation History

Appraisal			
Valuation Year	Improvements	Land	Total
2013	\$26,187,000	\$1,213,500	\$27,400,500
2012	\$26,182,400	\$1,213,500	\$27,395,900
2011	\$26,182,400	\$1,213,500	\$27,395,900

Assessment			
Valuation Year	Improvements	Land	Total
2013	\$18,331,000	\$849,500	\$19,180,500
2012	\$18,327,800	\$849,500	\$19,177,300
2011	\$18,327,800	\$849,500	\$19,177,300